

Product data sheet

Specifications



Safety switch, double throw, non fusible, 3 pole, 3 wire, 600VAC, 600VDC, 60A, Type 1

DTU362

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Double Throw Safety Switch
Duty Rating	Heavy duty
Disconnect Type	Non-fusible disconnect switch
Factory Installed Neutral	None
Number of Poles	3
Current Rating	60 A
Voltage Rating	600 V AC 600 V DC
Enclosure Rating	NEMA 1
Motor power hp	10 hp at 240 V AC 50-60 Hz for 1 phase motors 20 hp at 240 V AC 50-60 Hz for 3 phase motors 25 hp at 480 V AC 50-60 Hz for 1 phase motors 50 hp at 480 V AC 50-60 Hz for 3 phase motors 30 hp at 600 V AC 50-60 Hz for 1 phase motors 60 hp at 600 V AC 50-60 Hz for 3 phase motors 10 hp at 250 V DC 30 hp at 600 V DC

Complementary

Short-circuit current	10 kA H or K 200 kA R, J or T
Fuse type	H or K R, J or T
Mounting Type	Surface
Wire Size	AWG 12...AWG 2 aluminium AWG 14...AWG 2 copper
Tightening torque	35 lbf.in (4.0 N.m) 0.003...0.008 in² (2.06...5.26 mm²) (AWG 14...AWG 10) 40 lbf.in (4.5 N.m) 0.01 in² (8.37 mm²) (AWG 8) 45 lbf.in (5.08 N.m) 0.02...0.03 in² (13.3...21.15 mm²) (AWG 6...AWG 4) 50 lbf.in (5.6 N.m) 0.04...0.05 in² (26.67...33.62 mm²) (AWG 3...AWG 2)
Depth	6.93 in (176.02 mm)
Width	11.96 in (303.78 mm)
Height	29.94 in (760.48 mm)
Net Weight	39.00 lb(US) (17.69 kg)

Environment

Certifications	cULus
----------------	-------

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US10DE100033
Discount Schedule	0DE1
GTIN	785901308676
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	10.300 in (26.162 cm)
Package 1 Width	12.500 in (31.750 cm)
Package 1 Length	33.000 in (83.820 cm)
Package weight(Lbs)	35.490 lb(US) (16.098 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	16
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	560.001 lb(US) (254.012 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	199
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

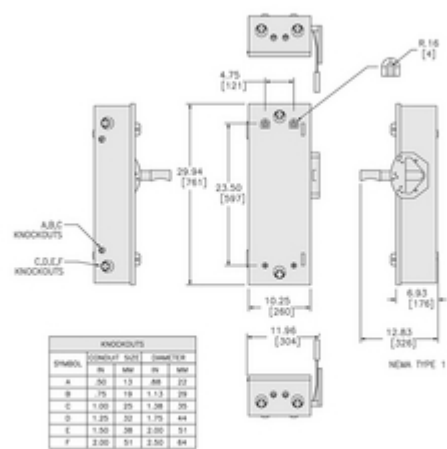

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

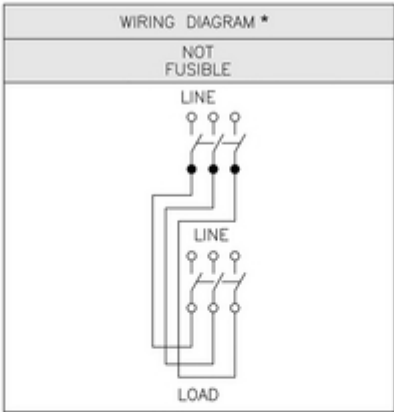

- DTU321 DTU362
- DTU361 DTU323
- DTU322 DTU363

* FIELD CONVERTABLE TO FEED TWO ALTERNATE LOADS FROM A SINGLE SOURCE