

Product data sheet

Specifications



Safety switch, double throw, non fusible, 3 pole, 3 wire, 600VAC, 600VDC, 400A, Type 12 without knock outs

DTU365AWK

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Double Throw Safety Switch
Duty Rating	General duty
Disconnect Type	Non-fusible disconnect switch
Factory Installed Neutral	None
Number of Poles	3
Current Rating	400 A
Voltage Rating	600 V AC 250 V DC
Enclosure Rating	NEMA 12
Motor power hp	125 hp at 240 V AC 50-60 Hz for 3 phase motors 250 hp at 480 V AC 50-60 Hz for 3 phase motors 350 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC

Complementary

Short-circuit current	10 kA H or K 100 kA R, J or T
Fuse type	H or K R, J or T
Mounting Type	Surface
Wire Size	AWG 1/0...750 kcmil aluminium/copper
Tightening torque	550 lbf.in (62.1 N.m) 0.08...0.5 in² (53.49...304 mm²) (AWG 1/0...750 kcmil) 62.14 lbf.in (7.02 N.m) 0.08...0.2 in² (53.49...152 mm²) (2 x AWG 1/0...2 x 300 kcmil)
Depth	7.25 in (184.15 mm)
Width	24 in (609.6 mm)
Height	54.50 in (1384.30 mm)

Environment

Certifications	UL Listed
----------------	-----------

Ordering and shipping details

Category	US10DE100134
Discount Schedule	0DE1
GTIN	3606481716774

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	54.5 in (138.4 cm)
Package 1 Width	24.02 in (61.0 cm)
Package 1 Length	7.2 in (18.4 cm)
Package weight(Lbs)	160.0006 lb(US) (72.575 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1282
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

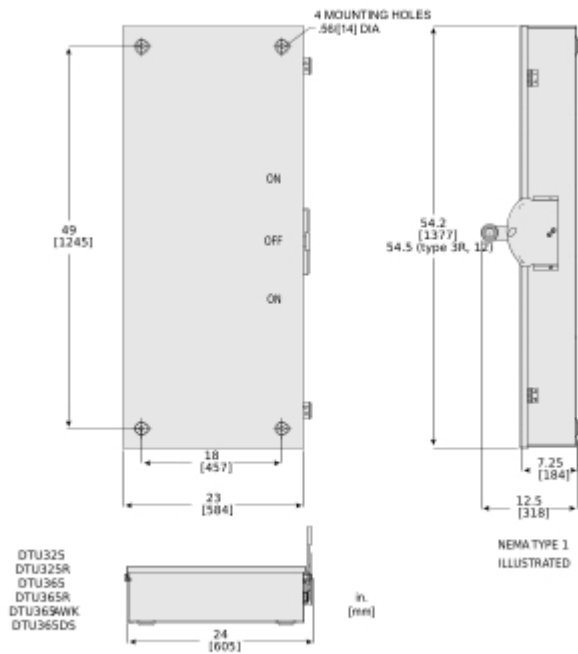

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

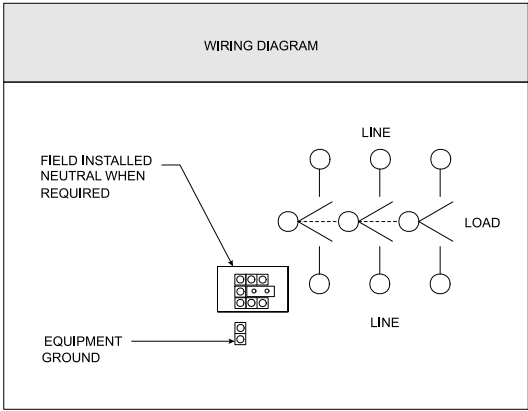

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.