

Product data sheet

Specifications



Safety switch, heavy duty, fusible, 1200A, 3 pole, 250hp, 240VAC/ 250VDC, neutral factory installed, NEMA1

H328N

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	Neutral (factory installed)
Number of Poles	3
Current Rating	1200 A
Voltage Rating	250 V DC 240 V AC
Enclosure Rating	NEMA 1 steel
Motor power hp	50 hp at 240 V AC 50-60 Hz for 1 phase motors 100 hp at 240 V AC 50-60 Hz for 3 phase motors 250 hp at 240 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC

Complementary

Short-circuit current	200 kA maximum for L
Fuse type	L
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire (3PH + G)
Wire Size	AWG 3/0...750 kcmil copper or aluminium
Tightening torque	375 lbf.in (42.4 N.m) 0.13...0.6 in² (85.01...380 mm²) (AWG 3/0...750 kcmil)
Depth	17.75 in (450.85 mm)
Width	36.62 in (930.15 mm)
Height	69.13 in (1755.90 mm)
Net Weight	369.9 lb(US) (167.8 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	US10DE100053
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	0DE1
GTIN	785901195450
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	73.80 in (187.452 cm)
Package 1 Width	30.00 in (76.200 cm)
Package 1 Length	38.00 in (96.520 cm)
Package weight(Lbs)	358.0001 lb(US) (162.386 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	2467
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again


Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Product data sheet

H328N

Dimensions Drawings


Approximate Dimensions

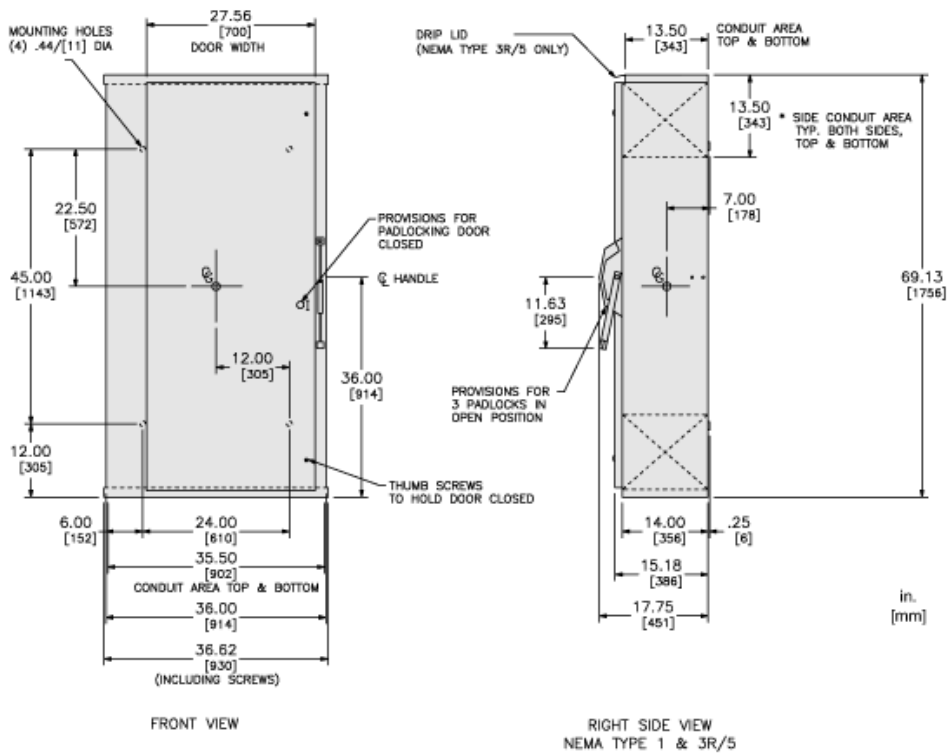

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	3 PHASE HORSEPOWER RATINGS						DC HORSEPOWER RATINGS			
			240VAC		480VAC		600VAC		250VDC		600VDC	
			STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.
H328	240VAC;250VDC	A	100	250	—	—	—	—	50	50	—	—
H328R	240VAC;250VDC	A	100	250	—	—	—	—	50	50	—	—
H328N	240VAC;250VDC	B	100	250	—	—	—	—	50	50	—	—
H328NR	240VAC;250VDC	B	100	250	—	—	—	—	50	50	—	—
H368	600VAC;600VDC	A	100	250	200	500	250	500	—	—	50	50
H368R	600VAC;600VDC	A	100	250	200	500	250	500	—	—	50	50
H368N	600VAC;600VDC	B	100	250	200	500	250	500	—	—	50	50
H368NR	600VAC;600VDC	B	100	250	200	500	250	500	—	—	50	50
HU368	600VAC;600VDC	C	100	100	—	500	—	500	—	—	50	50
HU368R	600VAC;600VDC	C	100	100	—	500	—	500	—	—	50	50

Connections and Schema

Wiring Diagrams

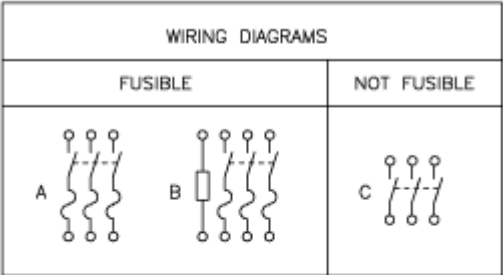


TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
1200	(4)750 KCMIL	(4)#3/0 AWG	75°C AL OR CU

FUSE PROVISIONS			
AMPERES	TYPE	AMPERES	TYPE
1200	CLASS "L"	800	CLASS "L"

Technical Illustration


Dimensions

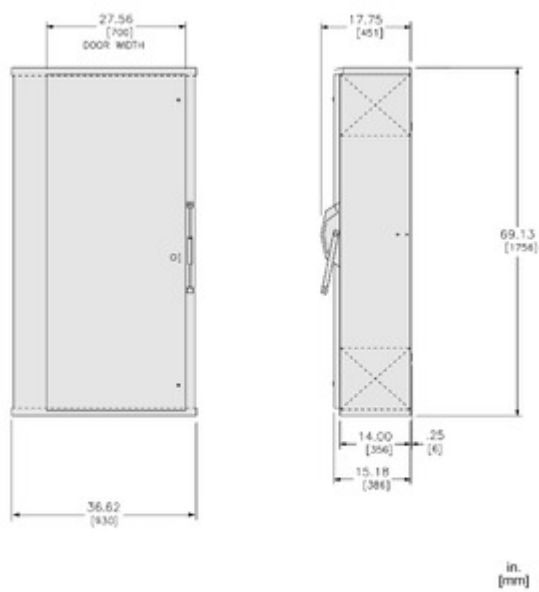

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

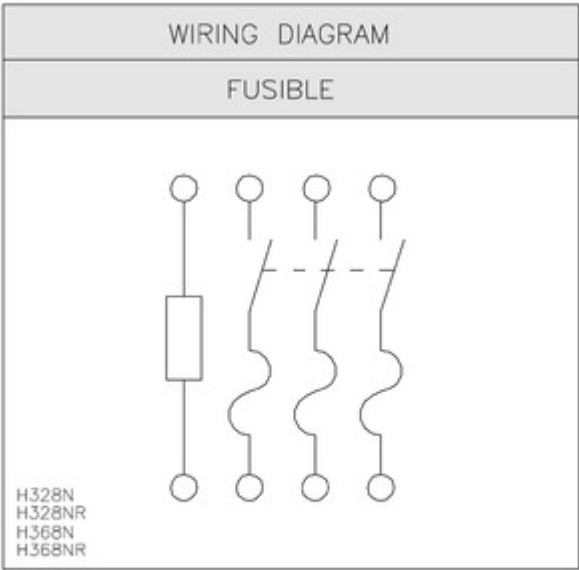

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.