

Product data sheet

Specifications

SQUARE D



Safety switch, heavy duty, fusible, 60A, 600VAC/DC, 3 poles, 50HP, NEMA 12K, Crouse-Hinds Arktite

H362AWC

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Receptacle Switch
For Use With	Plug APJ6485 Crouse-Hinds Arktite
Disconnect Type	Fusible disconnect switch
Number of Poles	3
Current rating	60 A
Voltage Rating	600 V AC 250 V DC
Enclosure Rating NEMA 3R	NEMA 12K
Maximum Horse Power Rating	15 hp at 480 V AC 50-60 Hz for 3 phase motors 30 hp at 480 V AC 50-60 Hz for 3 phase motors 15 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 600 V AC 50-60 Hz for 3 phase motors 10 hp at 250 V DC

Complementary

Short-circuit Current Rating	10 kA H or K 100 kA R, J or T 200 kA R, J or T
Fuse Type	H or K R, J or T R, J or T
Mounting Type	Surface
Electrical Connection	Receptacle
Wire Configuration	4-wire
Wire Size	AWG 12...AWG 2 aluminium AWG 14...AWG 2 copper
Tightening torque	45 lbf.in (5.08 N.m) (AWG 6...AWG 4) 40 lbf.in (4.5 N.m) (AWG 8) 35 lbf.in (4.0 N.m) (AWG 14...AWG 10)
Depth	7 in (177.8 mm)
Width	10.5 in (266.7 mm)
Height	16.5 in (419.1 mm)
Net Weight	26.5 lb(US) (12 kg)

Environment

Certifications	UL Listed
----------------	-----------

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Category	US10DE100118
Discount Schedule	0DE1
GTIN	785901195573
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.700 in (19.558 cm)
Package 1 Width	14.000 in (35.560 cm)
Package 1 Length	33.200 in (84.328 cm)
Package weight(Lbs)	27.099 lb(US) (12.292 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	15
Package 2 Height	43.500 in (110.490 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	410.0006 lb(US) (185.973 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 114

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free Yes

Use Again

Repack and remanufacture


Circularity Profile No need of specific recycling operations

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration


Dimensions

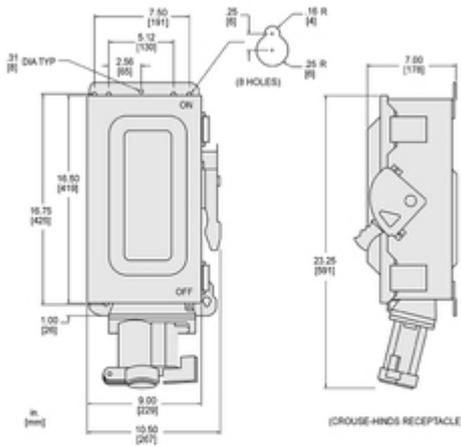

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.
WHEN MOUNTING THESE SWITCHES, ALLOW 4.00 IN / 102 MM MIN. CLEARANCE.

Technical Illustration

Wiring diagram

WIRING DIAGRAMS	
FUSIBLE	NOT FUSIBLE
 <p>H362AWC H362AWCR3 H362AWCVW</p>	 <p>HU362AWC</p>