

Product data sheet

Specifications



Safety switch, heavy duty, fusible, 400A, 3 wire, 3 pole, 250hp, 600VAC/DC, NEMA 12

H365AWK

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Number of Poles	3
Current Rating	400 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 3R/12 galvanized steel
Motor power hp	100 hp at 480 V AC 50-60 Hz for 3 phase motors 250 hp at 480 V AC 50-60 Hz for 3 phase motors 125 hp at 600 V AC 50-60 Hz for 3 phase motors 350 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC 50 hp at 600 V DC

Complementary

Short-circuit current	10 kA for H or K 200 kA for R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire
Wire Size	AWG 1/0...750 kcmil copper or aluminium
Tightening torque	550 lbf.in (62.1 N.m) (AWG 1/0...750 kcmil)
Depth	10.13 in (257.30 mm)
Width	26.25 in (666.75 mm)
Height	46.25 in (1174.75 mm)
Net Weight	170.0 lb(US) (77.1 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US10DE100155
Discount Schedule	0DE1
GTIN	785901451815
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	13.00 in (33.020 cm)
Package 1 Width	26.80 in (68.072 cm)
Package 1 Length	51.50 in (130.810 cm)
Package weight(Lbs)	175.0009 lb(US) (79.379 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	2
Package 2 Height	30.50 in (77.470 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	56.00 in (142.240 cm)
Package 2 Weight	350.000 lb(US) (158.757 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1273
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

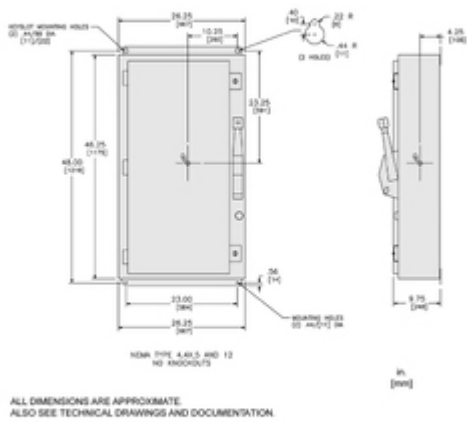

Technical Illustration

Wiring diagram

FUSIBLE



- | | | |
|---------|--------|--------|
| H325AWK | H325DS | H325SS |
| H365AWK | H365DS | H365SS |