

Product data sheet

Specifications

SQUARE D



Safety switch, heavy duty, fusible, 400A, 3 pole, 250hp, 600VAC/DC, NEMA 4, 4X, 5, 304 steel, neutral

H365NDS

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	Neutral (factory installed)
Number of Poles	3
Current Rating	400 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 4/4X/5 stainless steel 304
Motor power hp	100 hp at 480 V AC 50-60 Hz for 3 phase motors 250 hp at 480 V AC 50-60 Hz for 3 phase motors 125 hp at 600 V AC 50-60 Hz for 3 phase motors 350 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC 50 hp at 600 V DC

Complementary

Short-circuit current	10 kA for H or K 200 kA for R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire (3PH + N)
Wire Size	AWG 1/0...750 kcmil copper or aluminium
Tightening torque	550 lbf.in (62.1 N.m) (AWG 1/0...750 kcmil)
Depth	10.13 in (257.30 mm)
Width	26.25 in (666.75 mm)
Height	46.25 in (1174.75 mm)
Net Weight	185.0 lb(US) (83.9 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US10DE100055
Discount Schedule	0DE1
GTIN	785901195917
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	50.98 in (129.5 cm)
Package 1 Width	26.69 in (67.8 cm)
Package 1 Length	13.11 in (33.3 cm)
Package weight(Lbs)	185.001 lb(US) (83.915 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1392
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

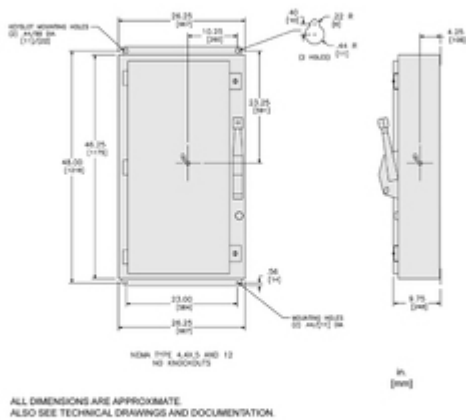

Technical Illustration

Wiring diagram

FUSIBLE



H325NAWK	H325NDS	H325NSS
H365NAWK	H365NDS	H365NSS