

# Product data sheet

Specifications

SQUARE D



**Safety switch, heavy duty, fusible, 800A, 3 wire, 3 pole, 500hp, 600VAC/DC, NEMA 1**

H367

**Product availability:** Stock - Normally stocked in distribution facility

## Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Number of Poles	3
Current Rating	800 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 1 steel
Motor power hp	200 hp at 480 V AC 50-60 Hz for 3 phase motors 500 hp at 480 V AC 50-60 Hz for 3 phase motors 250 hp at 600 V AC 50-60 Hz for 3 phase motors 500 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 600 V DC

## Complementary

Short-circuit current	200 kA maximum for L
Fuse type	L
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire
Wire Size	AWG 3/0...750 kcmil copper or aluminium
Tightening torque	375 lbf.in (42.4 N.m) 0.13...0.6 in <sup>2</sup> (85.01...380 mm <sup>2</sup> ) (AWG 3/0...750 kcmil)
Depth	17.75 in (450.85 mm)
Width	36.62 in (930.15 mm)
Height	69.13 in (1755.90 mm)
Net Weight	369.9 lb(US) (167.8 kg)

## Environment

Certifications	UL listed file E2875
----------------	----------------------

## Ordering and shipping details

Category	US10DE100053
Discount Schedule	ODE1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

GTIN	785901195399
Returnability	Yes
Country of origin	MX

---

## Packing Units

---

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	73.80 in (187.452 cm)
Package 1 Width	30.00 in (76.200 cm)
Package 1 Length	38.00 in (96.520 cm)
Package weight(Lbs)	358.0001 lb(US) (162.386 kg)

---

## Contractual warranty

---

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	<b>1095</b>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
REACh Regulation	<a href="#">REACh Declaration</a>
California proposition 65	<b>WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a></b>
Halogen content performance	Halogen free plastic parts product
PVC free	Yes


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No


## Dimensions Drawings

## Approximate Dimensions

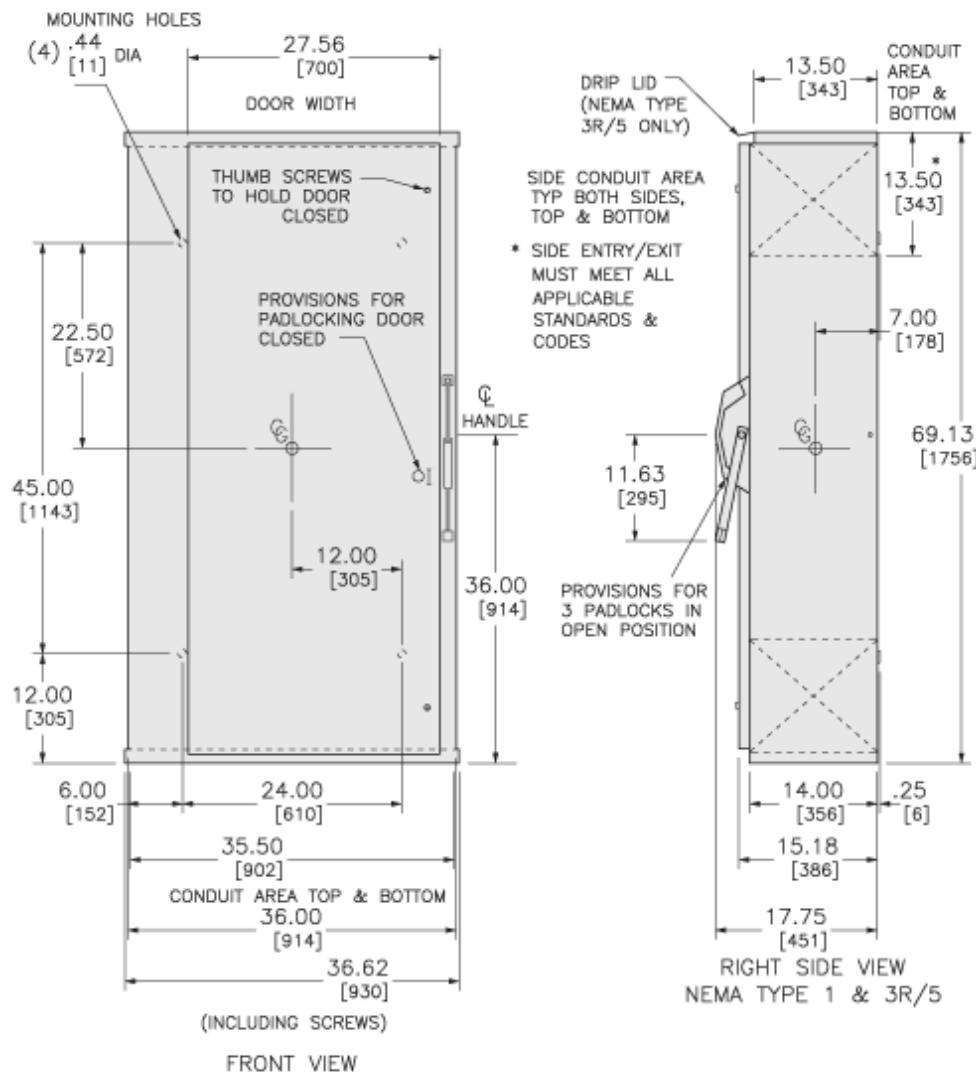

## Technical Illustration


## Dimensions

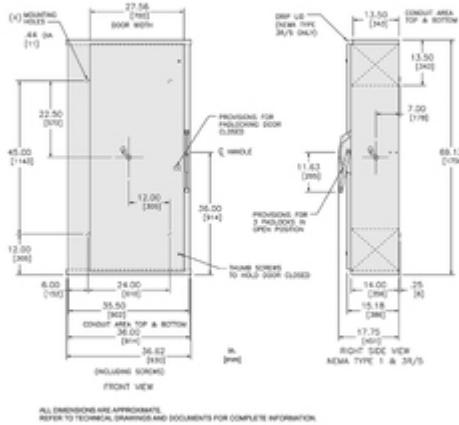

## Technical Illustration

### Wiring diagram

---

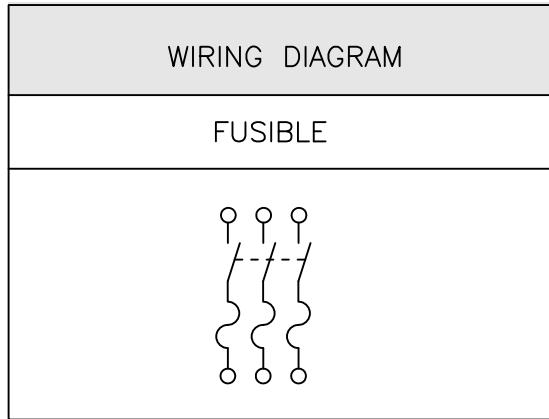

H327  
H327R  
H367  
H367R

REFER TO TECHNICAL DRAWINGS AND DOCUMENTS FOR  
COMPLETE INFORMATION.

Image of product / Alternate images

Alternative

---

