

# Product data sheet

Specifications

SQUARE D



## Safety switch, heavy duty, fusible, 100A, 4 pole, 75hp, 600VAC/DC, NEMA 1

H463

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Number of Poles	4
Current Rating	100 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 1 steel
Standard Motor Power Rating	25 hp at 480 V AC 50-60 Hz for 2 phases motors 60 hp at 480 V AC 50-60 Hz for 2 phases motors 30 hp at 600 V AC 50-60 Hz for 2 phases motors 75 hp at 600 V AC 50-60 Hz for 2 phases motors 20 hp at 250 V DC 30 hp at 600 V DC

### Complementary

Short-circuit current	10 kA for H or K 200 kA for R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire
Wire Size	AWG 12...AWG 1/0 aluminium AWG 14...AWG 1/0 copper
Tightening torque	50 lbf.in (5.6 N.m) (AWG 1...AWG 3/0) 45 lbf.in (5.08 N.m) (AWG 6...AWG 4) 40 lbf.in (4.5 N.m) 0.013 in <sup>2</sup> (8.367 mm <sup>2</sup> ) (AWG 8) 35 lbf.in (4.0 N.m) 0.003...0.008 in <sup>2</sup> (2.06...5.261 mm <sup>2</sup> ) (AWG 14...AWG 10)
Depth	6.85 in (173.99 mm)
Width	16.13 in (409.70 mm)
Height	20.5 in (520.7 mm)
Net Weight	30.9 lb(US) (14 kg)

### Environment

Certifications	UL listed file E2875
----------------	----------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Ordering and shipping details

Category	US10DE100008
Discount Schedule	0DE1
GTIN	785901482499
Returnability	Yes
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.100 in (18.034 cm)
Package 1 Width	16.800 in (42.672 cm)
Package 1 Length	25.700 in (65.278 cm)
Package weight(Lbs)	38.239 lb(US) (17.345 kg)

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 <b>Environmental footprint</b>	
Carbon footprint (kg CO2 eq, Total Life cycle)	182
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

### Use Better

 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
PVC free	Yes


### Use Again

 <b>Repack and remanufacture</b>	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

---

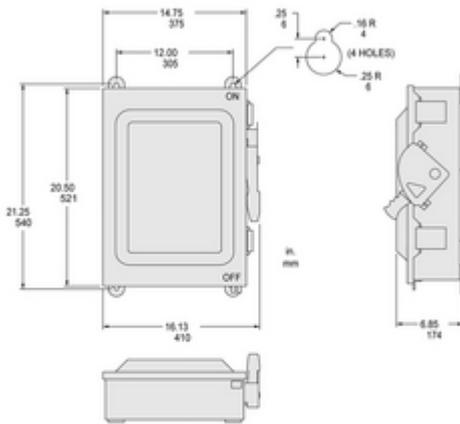


WHEN MOUNTING THESE SWITCHES, ALLOW 3.75(95) MIN CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.  
ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

---

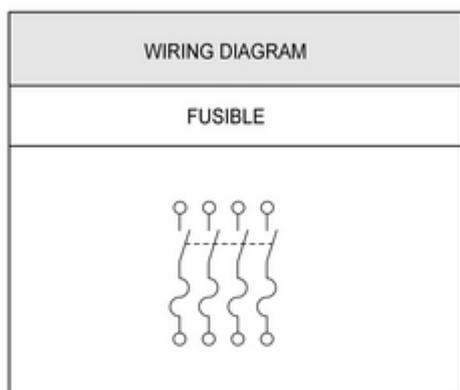

H461  
H462  
H463