

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, Homeline,
35A, 2 pole, 120/240VAC, 10kA
AIR, standard type, plug in, UL

HOM235

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Miniature circuit-breaker
Range	Homeline
Current Rating	35 A
Certifications	UL Listed
Voltage Rating	120/240 V AC
Mounting Type	Plug-in
Number of Poles	2P
Short Circuit Current Rating	10 kA
Number of Spaces	2
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Box lugs
Wire Size	1 x AWG 8...AWG 2 (aluminium/copper)

Complementary

Tightening torque	40.7 lbf.in (4.6 N.m) (AWG 8...AWG 2)
Height	3.13 in (79.50 mm)
Width	2 in (50.8 mm)
Depth	2.98 in (75.69 mm)

Environment

Ambient Air Temperature for Operation	104 °F (40 °C)
---------------------------------------	----------------

Ordering and shipping details

Category	US1DE3D00046
Discount Schedule	DE3D
GTIN	785901065494
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1
Package 1 Height	3.10 in (7.87 cm)
Package 1 Width	2.00 in (5.08 cm)
Package 1 Length	3.20 in (8.13 cm)
Package weight(Lbs)	11.20 oz (317.52 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	3.20 in (8.128 cm)
Package 2 Width	2.60 in (6.604 cm)
Package 2 Length	10.20 in (25.908 cm)
Package 2 Weight	3.609 lb(US) (1.637 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	50
Package 3 Height	10.50 in (26.67 cm)
Package 3 Width	7.10 in (18.034 cm)
Package 3 Length	16.70 in (42.418 cm)
Package 3 Weight	36.500 lb(US) (16.556 kg)

Contractual warranty

Warranty	Lifetime
-----------------	----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	23
--	----

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Compliant
-----------------------------------	-----------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

Use Again


Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----

Technical Illustration

Dimensions

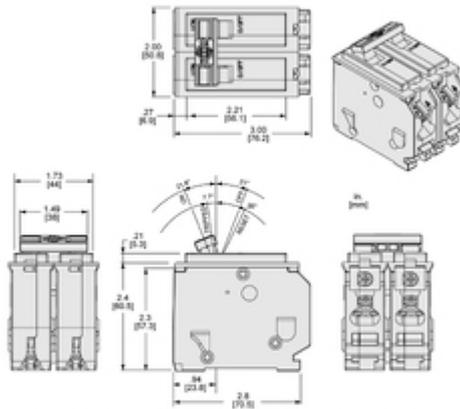

All dimensions are approximate. Also refer to technical drawings and documentation.

Image of product / Alternate images

Alternative

Technical Benefits Thermal Magnetic Breaker



-  Miniature circuit breaker rated at 35A
-  Protects against overloads and short-circuits
-  Product characteristics conformity is certified by the Underwriters Laboratories (UL)
-  The current capacity that this circuit breaker is able to interrupt before breaking is 10kA
-  For residential/commercial use to protect entire branch circuits
-  Compatible with Homeline electrical panel and CSEDs with 2 spaces

Compatible products

Homeline 35 Amp 2 Pole Circuit Breaker
MFG Model Number: HOM235CP



Compatible with Homeline electrical panels and CSEDs with 2 spaces



HOM1RKCP HOM2PALACP