

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, Homeline, 60A, 2 pole, 120/240VAC, 10kA AIR, standard type, plug in, UL

HOM260

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Miniature circuit-breaker
Range	Homeline
Current Rating	60 A
Certifications	UL Listed
Voltage Rating	120/240 V AC
Mounting Type	Plug-in
Number of Poles	2P
Short Circuit Current Rating	10 kA
Number of Spaces	2
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Box lugs
Wire Size	1 x AWG 8...AWG 2 (aluminium/copper)

Complementary

Tightening torque	40.7 lbf.in (4.6 N.m) (AWG 8...AWG 2)
Height	3.13 in (79.50 mm)
Width	2 in (50.8 mm)
Depth	2.98 in (75.69 mm)

Environment

Ambient Air Temperature for Operation	104 °F (40 °C)
---------------------------------------	----------------

Ordering and shipping details

Category	US1DE3D00046
Discount Schedule	DE3D
GTIN	785901065333
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1
Package 1 Height	3.13 in (7.950 cm)
Package 1 Width	2.00 in (5.080 cm)
Package 1 Length	3.00 in (7.620 cm)
Package weight(Lbs)	11.200 oz (317.514 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	3.13 in (7.950 cm)
Package 2 Width	3.13 in (7.950 cm)
Package 2 Length	10.13 in (25.730 cm)
Package 2 Weight	3.569 lb(US) (1.619 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	50
Package 3 Height	10.75 in (27.305 cm)
Package 3 Width	6.70 in (17.018 cm)
Package 3 Length	16.60 in (42.164 cm)
Package 3 Weight	36.969 lb(US) (16.769 kg)

Contractual warranty

Warranty	Lifetime
-----------------	----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	23
--	----

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Compliant
-----------------------------------	-----------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

Use Again


Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----

Technical Illustration

Dimensions

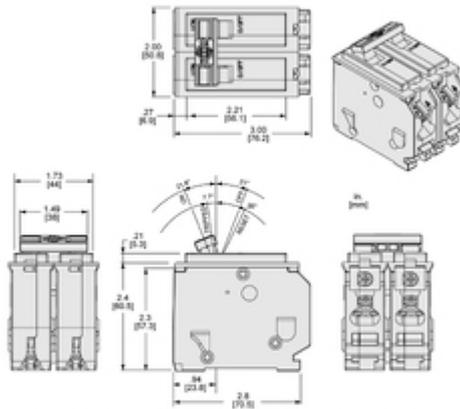

All dimensions are approximate. Also refer to technical drawings and documentation.

Image of product / Alternate images

Alternative

Technical Benefits Thermal Magnetic Breaker



-  Miniature circuit breaker rated at 60A
-  Protects against overloads and short-circuits
-  Product characteristics conformity is certified by the Underwriters Laboratories (UL)
-  The current capacity that this circuit breaker is able to interrupt before breaking is 10kA
-  For residential/commercial use to protect entire branch circuits
-  Compatible with Homeline electrical panel and CSEDs with 2 spaces



Homeline™

HOM260C

60A

120/240 VAC ~ 50/60 Hz
10,000 AIR/A nom.I

 **2 Poles**
2 Poles

-  Market-leading circuit protection
-  Qwik-Open™ technology - Overload and Short circuit protection





Compatible products

Homeline 60 Amp 2 Pole
Circuit Breaker
MFG Model Number: HOM260CP



→ Compatible with Homeline electrical panels and CSEDs with 2 spaces

HOM1RKCP HOM2PALACP

