

Product data sheet

Specifications

SQUARE D



Load center, Homeline, 1 phase, 30 spaces, 60 circuits, 225A convertible main lugs, PoN, NEMA1, combo cover

HOM3060L225PC

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Load Center
Marketing Trade Name	Homeline
Load Center Type	PoN Convertible Mains (lugs)
Rated Current	225 A
Number of Spaces	30
Maximum Number of Single Pole Circuits	60
Enclosure Rating	NEMA 1 indoor enclosure
Cover Type	Combination flush/surface cover
Electrical Connection	Lugs

Complementary

Max Short Circuit Current Rating	10 kA
Maximum Number of Tandem Breakers	30
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 4...250 kcmil copper AWG 4...300 kcmil aluminium
Ground Bar	Grounding bar (ordered separately)
Busbar Material	Tin plated aluminium: busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	10
Bus Rated Current	225.0 A
Height	33.8 in (858 mm)
Width	14.3 in (362 mm)
Depth	3.7 in (95 mm)

Environment

Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL listed file E-6294

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ordering and shipping details

Category	US1DE3C00045
Discount Schedule	DE3C
GTIN	785901977209
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.80 in (14.732 cm)
Package 1 Width	16.40 in (41.656 cm)
Package 1 Length	36.80 in (93.472 cm)
Package weight(Lbs)	30.300 lb(US) (13.744 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	18
Package 2 Height	42.00 in (106.680 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	569.999 lb(US) (258.547 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	72
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Under investigation
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

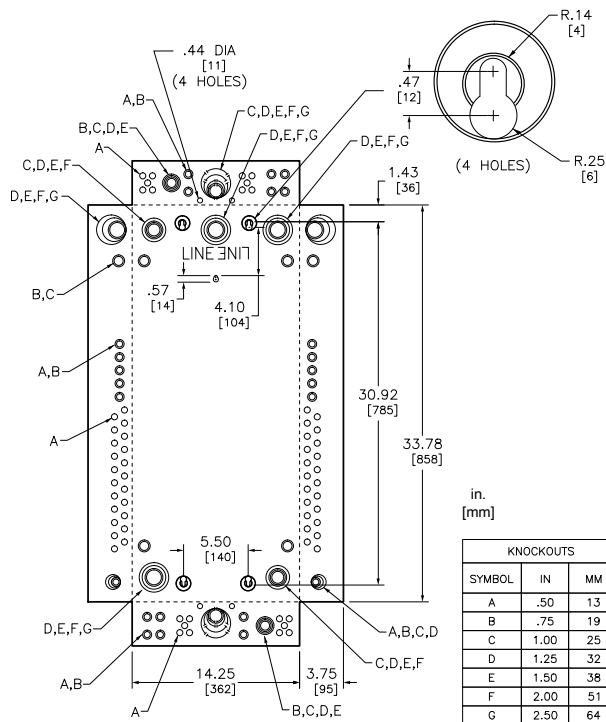

Technical Illustration

Wiring diagram


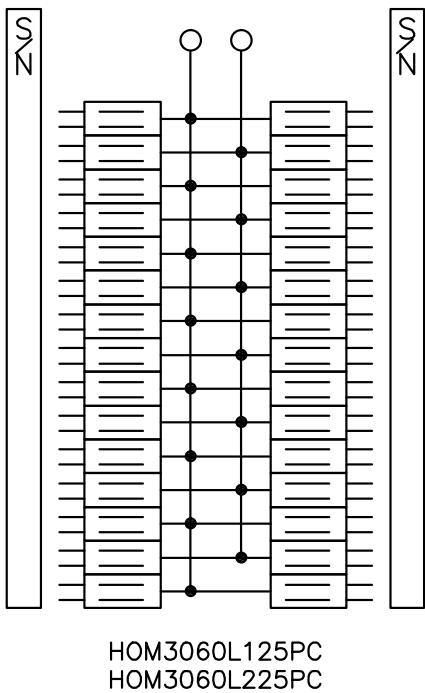


Image of product / Alternate images

Alternative

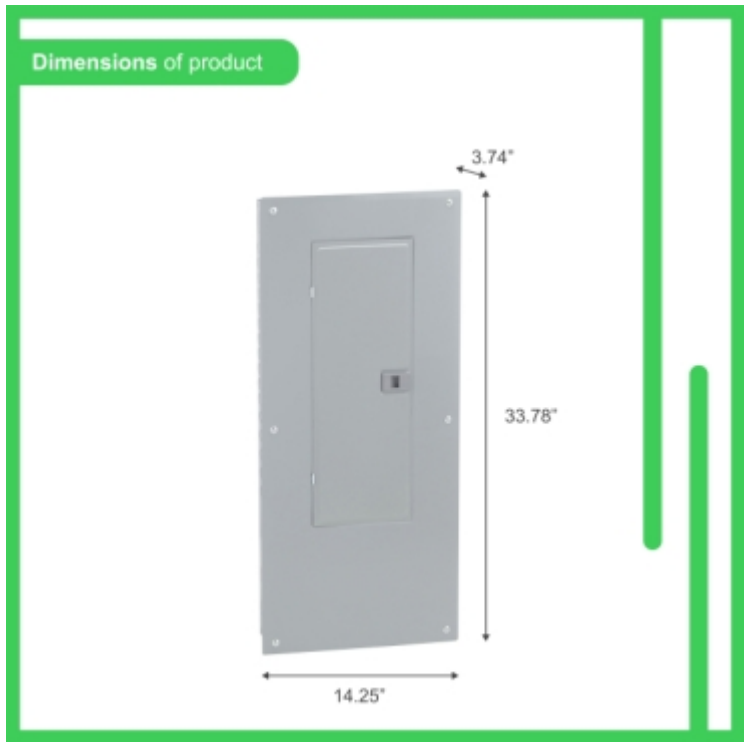

Up to / Hasta

225 A

Bus Bar Rating /
Capacidad de Barra
de conexión : 225A
max.

120/240 V~ Max., 1Ø,
50/60 Hz.

30

Spaces
Espacios

60

Circuits
Circuitos

Main Lugs

Zapatillas Principales

Indoor

Interior

INCLUDES INCLUIDOS

Surface / Flush
Sobreponer / Empotrar
29.69 lbs / 13.47 kg
W14.2" x H33.8" x D3.8"

