

Product data sheet

Specifications



Safety switch, heavy duty, non fusible, 400A, 3 pole, 350hp, 600VAC/DC, NEMA 12, viewing window

HU365AWK/VW

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Non-fusible disconnect
Factory Installed Neutral	None
Number of Poles	3
Current Rating	400 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 3R/12
Standard Motor Power Rating	125 hp at 240 V AC 50-60 Hz for 3 phase motors 250 hp at 480 V AC 50-60 Hz for 3 phase motors 350 hp at 600 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC 50 hp at 600 V DC

Complementary

Mounting Type	Surface
Wiring configuration	3-wire
Wire Size	AWG 1/0...750 kcmil copper or aluminium
Tightening torque	550 lbf.in (62.1 N.m) (AWG 1/0...750 kcmil)
Depth	10.13 in (257.30 mm) 10.13 in (257.30 mm) 10.13 in (257.30 mm) 10.13 in (257.30 mm) 10.13 in (257.30 mm)
Width	26.25 in (666.75 mm)
Height	46.25 in (1174.75 mm)
Product Weight	170.0 lb(US) (77.1 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	US10DE100117
Discount Schedule	0DE1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

GTIN	785901557418
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	50 in (127 cm)
Package 1 Width	12.50 in (31.75 cm)
Package 1 Length	26.50 in (67.31 cm)
Package weight(Lbs)	176.000 lb(US) (79.832 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Total lifecycle Carbon footprint	1 323 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	394 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	195 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	547 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	187 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	D0bd462c-e622-40b4-9939-dbd8b5850181
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Longer

Lifetime extension	
Repair	No

Use Again


Repack and remanufacture	
Recyclability potential, in %	90
Circularity Profile	No need of specific recycling operations
Take-back	No



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration


Dimensions

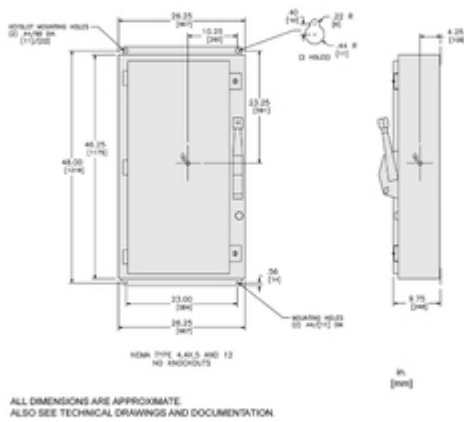

Technical Illustration

Wiring diagram

NOT FUSIBLE



HU365AWK

HU365DS

HU365SS