

Product data sheet

Specifications

SQUARE D



Circuit breaker, PowerPact L, 400A, 3 pole, 600VAC, 25kA, lugs, MicroLogic 3.3S, 80%

LJL36400U33X

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------|-----------------|
| Range | PowerPact |
| Product name | PowerPact L |
| Device short name | L-Frame |
| Product or Component Type | Circuit breaker |
| Device Application | Distribution |

Complementary

| | |
|---|---|
| Line Rated Current | 400 A |
| Number of Poles | 3P |
| Control Type | Toggle |
| Breaking capacity code | J |
| Breaking capacity | 100 kA 240 V AC 50/60 Hz UL 489 65 kA 480 V AC 50/60 Hz UL 489 25 kA 600 V AC 50/60 Hz UL 489 20 kA 250 V DC UL 489 |
| [Ue] rated operational voltage | 600 V AC 50/60 Hz IEC 60947-3 |
| Network Frequency | 50/60 Hz |
| [Ics] rated service breaking capacity | 65 kA 220/240 V AC 50/60 Hz IEC 60947-2 35 kA 380/440/415 V AC 50/60 Hz IEC 60947-2 18 kA 500/525 V AC 50/60 Hz IEC 60947-2 20 kA 250 V DC IEC 60947-2 20 kA 500 V DC IEC 60947-2 |
| [Uiimp] rated impulse withstand voltage | 8 kV IEC 60947-2 |
| Trip unit technology | Electronic, standard, MicroLogic 3.3 S, LSI |
| Continuous current rating | 80 % |
| [Ui] rated insulation voltage | 750 V IEC 60947-2 |
| Trip unit name | MicroLogic 3.3 S |
| Suitability for isolation | Yes IEC 60947-2 |
| Utilisation category | Category A |
| AWG gauge | 2 x AWG 2/0...500 kcmil aluminium/copper |
| Local signalling | Ready 1 LED green) Alarm 1 LED 90 % Ir orange) Alarm LED 105 % Ir red) Switched off (OFF) 1 trip indicator green) |
| Mounting mode | Unit mount lug) |
| Mounting Support | Lug |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|---|---|
| Electrical connection | Lugs, line Lugs, load |
| Terminal identifier | AL600LS52K3 |
| Long time pick-up adjustment range | 0.25...1 x In |
| Tightening torque | 442.5 lbf.in (50 N.m) 0.1...0.4 in ² (70...240 mm ²) (AWG 2/0...500 kcmil) |
| Number of slots | 2 auxiliary switch OF plug-in) 1 alarm switch SD plug-in) 1 overcurrent trip switch SDE plug-in) 1 voltage release MN or MX plug-in) |
| Power wire stripping length | 1.2 in (31 mm) 2.4 in (61 mm) |
| Color | Black |
| Height | 13.4 in (340 mm) |
| Width | 5.5 in (140 mm) |
| Depth | 4.3 in (110 mm) |
| Net Weight | 13.7 lb(US) (6.2 kg) |
| Communication interface | Modbus Ethernet |
| Circuit breaker application | HACR rated |

Environment

| | |
|--|--|
| Standards | UL CSA NEMA NOM-003-SCFI-2000 IEC 60947-2 |
| Product certifications | UL CSA NOM |
| IP degree of protection | Front cover IP40 |
| Pollution degree | 3 IEC 60947-1 |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Ambient Air Temperature for Storage | -58...185 °F (-50...85 °C) |
| Operating altitude | < 6561.68 ft (2000 m) without derating 5000 m with derating |

Ordering and shipping details

| | |
|--------------------------|--------------|
| Category | US10DE201116 |
| Discount Schedule | ODE2 |
| GTIN | 785901303794 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|-------------------------------|--------------------|
| Unit Type of Package 1 | PCE |
| Nbr. of units in pkg. | 1 |
| Package 1 Height | 8.75 in (22.23 cm) |

| | |
|---------------------|------------------------|
| Package 1 Width | 10.75 in (27.31 cm) |
| Package 1 Length | 19.50 in (49.53 cm) |
| Package weight(Lbs) | 17.61 lb(US) (7.99 kg) |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

| | |
|--|------|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 1160 |
|--|------|

| | |
|--------------------------|---|
| Environmental Disclosure | Product Environmental Profile |
|--------------------------|---|

Use Better

Materials and Substances

| | |
|--|-----|
| Packaging made with recycled cardboard | Yes |
|--|-----|

| | |
|--------------------------------------|----|
| Packaging without single use plastic | No |
|--------------------------------------|----|

| | |
|-----------------------------------|---------------------------|
| EU RoHS Directive | Compliant with Exemptions |
|-----------------------------------|---------------------------|

| | |
|------------------|-----------------------------------|
| REACH Regulation | REACH Declaration |
|------------------|-----------------------------------|

California proposition 65

WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

| | |
|----------|-----|
| PVC free | Yes |
|----------|-----|

Use Again

Repack and remanufacture

| | |
|---------------------|---|
| Circularity Profile | End of Life Information |
|---------------------|---|


| | |
|-----------|----|
| Take-back | No |
|-----------|----|

WEEE Label

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

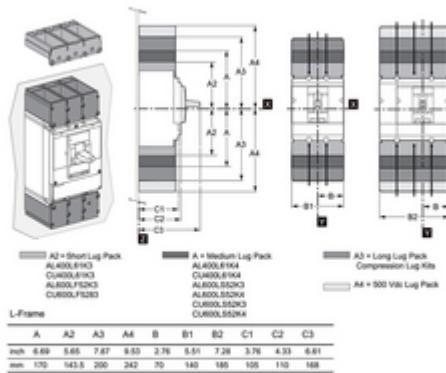

All dimensions are approximate.
Also see CAD, technical drawings, and technical documentation.