

Product data sheet

Specifications



Meter center, MP Meter-Pak, 4 sockets, lever bypass, jaw release, 5 jaws, 600A bus, 225A max breaker rating, ringless

MPL64225

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Meter Center
Socket Rating	225 A
Main Type	Main Lugs
Number of Jaws	5
Number of Meter Sockets	4
Socket Type	Ringless

Complementary

Main Rating	400 A 600 A
Bus Rating	600 A
Certifications	UL Listed
Type	Meter-Pak
Busbar Material	Aluminium: busbar
Bypass Type	Lever bypass
Enclosure Material	Steel
Enclosure Rating	NEMA 3R
Maximum Voltage Rating	120/240 V AC
Mounting	Surface
Phase	1 phase
Service Feed Location	UG OH
Wire Size	AWG 1/0...600 kcmil 1 aluminium AWG 1/0...600 kcmil 1 copper
Wire Configuration	3-wire
Height	67.37 in (1711.20 mm)
Width	35.37 in (898.40 mm)
Depth	9.62 in (244.35 mm)

Ordering and shipping details

Category	US10DE400021
Discount Schedule	0DE4

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

GTIN	785901336563
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	20.5 in (52.1 cm)
Package 1 Width	42.008 in (106.7 cm)
Package 1 Length	72.008 in (182.9 cm)
Package weight(Lbs)	267.000 lb(US) (121.109 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Take-back	No

Technical Illustration


Dimensions

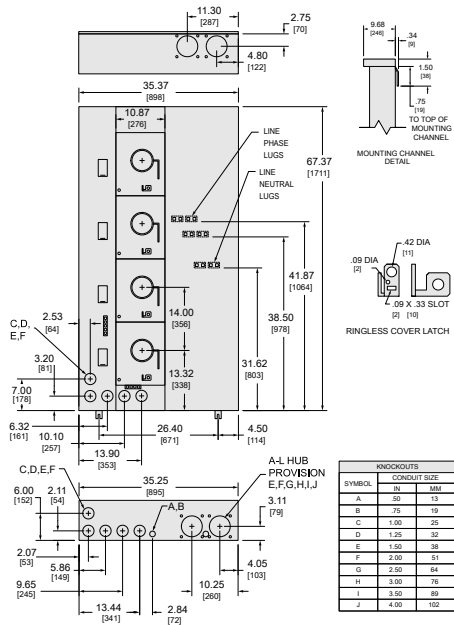

MPL64225
ALL DIMENSIONS ARE APPROXIMATE.
REFER TO CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

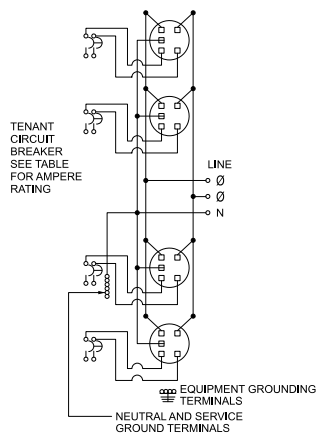

MPL64225

TENANT SERVICE DISCONNECTS (ORDER ONE PER SOCKET POSITION)			
TENANT CIRCUIT BREAKER (2-POLE)	AMPERE RATINGS MIN. - MAX.	SHORT CIRCUIT BREAKER RATING RMS SYMMETRICAL AMPERES MAX.	VOLTS MAX.
QO ♦	40 - 125	10,000	120/240
QBP-TM	70 - 225	10,000	
QO-VH ♦	40 - 60	22,000	
QDP-TM	70 - 225	25,000	
QOH ♦	40 - 60	42,000	
QGP-TM	70 - 225	65,000	
QJP-TM	70 - 225	100,000	

♦ FOR QO TYPE CIRCUIT BREAKERS ADAPTER KIT CAT. NO. EZM125QOA IS REQUIRED (ORDER SEPARATELY).
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.