

Product data sheet

Specifications

SQUARE D



Panelboard enclosure cover, NQ/
NF, Type 1, flush, for 20in W x
38in H box

NC38F

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Flush cover
Color	Gray
Cover type	Flush cover

Complementary

Material	Steel
Height	39.52 in (1003.81 mm)
Width	21.52 in (546.61 mm)
Tightening torque	Cover 10...12 lb.in

Environment

Enclosure Rating	NEMA 1
Product Certifications	cULus

Ordering and shipping details

Category	US1PE1A08352
Discount Schedule	PE1A
GTIN	785901084662
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.80 in (4.572 cm)
Package 1 Width	22.00 in (55.880 cm)
Package 1 Length	43.00 in (109.220 cm)
Package weight(Lbs)	21.330 lb(US) (9.675 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	36
Package 2 Height	38.00 in (96.520 cm)
Package 2 Width	40.00 in (101.600 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	682.999 lb(US) (309.803 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

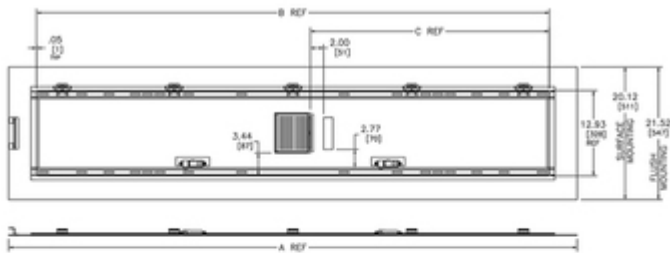

CATALOG NUMBER	A		B		C	
	IN	MM	IN	MM	IN	MM
NC38F	36.12	918	17.70	450	8.06	206
NC38F	36.12	918	23.70	602	9.16	233
NC38F	36.12	918	29.70	754	10.16	259
NC44F	44.12	1121	25.70	653	10.16	259
NC44F	44.12	1121	41.70	1059	10.16	259
NC50F	50.12	1273	47.70	1212	10.16	259
NC50F	50.12	1273	47.70	1212	20.16	512
NC60F	60.12	1525	53.70	1368	20.16	512
NC60F	60.12	1525	53.70	1368	27.16	695
NC74F	74.12	1883	65.70	1669	20.16	512
NC80F	80.12	2035	71.70	1821	20.16	512
NC100F	100.12	2540	77.70	1973	20.16	512
NC100F	100.12	2540	77.70	1973	27.16	695
NC125F	125.12	3175	83.70	2125	20.16	512
NC125F	125.12	3175	83.70	2125	27.16	695
NC150F	150.12	3810	89.70	2280	20.16	512
NC150F	150.12	3810	89.70	2280	27.16	695
NC175F	175.12	4445	95.70	2435	20.16	512
NC175F	175.12	4445	95.70	2435	27.16	695
NC200F	200.12	5080	101.70	2587	20.16	512
NC200F	200.12	5080	101.70	2587	27.16	695
NC225F	225.12	5715	107.70	2739	20.16	512
NC225F	225.12	5715	107.70	2739	27.16	695
NC250F	250.12	6350	113.70	2891	20.16	512
NC250F	250.12	6350	113.70	2891	27.16	695
NC275F	275.12	6985	119.70	3043	20.16	512
NC275F	275.12	6985	119.70	3043	27.16	695
NC300F	300.12	7620	125.70	3195	20.16	512
NC300F	300.12	7620	125.70	3195	27.16	695
NC325F	325.12	8255	131.70	3347	20.16	512
NC325F	325.12	8255	131.70	3347	27.16	695
NC350F	350.12	8890	137.70	3499	20.16	512
NC350F	350.12	8890	137.70	3499	27.16	695
NC375F	375.12	9525	143.70	3651	20.16	512
NC375F	375.12	9525	143.70	3651	27.16	695
NC400F	400.12	10160	149.70	3803	20.16	512
NC400F	400.12	10160	149.70	3803	27.16	695
NC425F	425.12	10795	155.70	3955	20.16	512
NC425F	425.12	10795	155.70	3955	27.16	695
NC450F	450.12	11430	161.70	4107	20.16	512
NC450F	450.12	11430	161.70	4107	27.16	695
NC475F	475.12	12065	167.70	4259	20.16	512
NC475F	475.12	12065	167.70	4259	27.16	695
NC500F	500.12	12700	173.70	4411	20.16	512
NC500F	500.12	12700	173.70	4411	27.16	695
NC525F	525.12	13335	179.70	4563	20.16	512
NC525F	525.12	13335	179.70	4563	27.16	695
NC550F	550.12	13970	185.70	4715	20.16	512
NC550F	550.12	13970	185.70	4715	27.16	695
NC575F	575.12	14605	191.70	4867	20.16	512
NC575F	575.12	14605	191.70	4867	27.16	695
NC600F	600.12	15240	197.70	5019	20.16	512
NC600F	600.12	15240	197.70	5019	27.16	695
NC625F	625.12	15875	203.70	5171	20.16	512
NC625F	625.12	15875	203.70	5171	27.16	695
NC650F	650.12	16510	209.70	5323	20.16	512
NC650F	650.12	16510	209.70	5323	27.16	695
NC675F	675.12	17145	215.70	5475	20.16	512
NC675F	675.12	17145	215.70	5475	27.16	695
NC700F	700.12	17780	221.70	5627	20.16	512
NC700F	700.12	17780	221.70	5627	27.16	695
NC725F	725.12	18415	227.70	5779	20.16	512
NC725F	725.12	18415	227.70	5779	27.16	695
NC750F	750.12	19050	233.70	5931	20.16	512
NC750F	750.12	19050	233.70	5931	27.16	695
NC775F	775.12	19685	239.70	6083	20.16	512
NC775F	775.12	19685	239.70	6083	27.16	695
NC800F	800.12	20320	245.70	6235	20.16	512
NC800F	800.12	20320	245.70	6235	27.16	695
NC825F	825.12	20955	251.70	6387	20.16	512
NC825F	825.12	20955	251.70	6387	27.16	695
NC850F	850.12	21590	257.70	6539	20.16	512
NC850F	850.12	21590	257.70	6539	27.16	695
NC875F	875.12	22225	263.70	6691	20.16	512
NC875F	875.12	22225	263.70	6691	27.16	695
NC900F	900.12	22860	269.70	6843	20.16	512
NC900F	900.12	22860	269.70	6843	27.16	695
NC925F	925.12	23495	275.70	6995	20.16	512
NC925F	925.12	23495	275.70	6995	27.16	695
NC950F	950.12	24130	281.70	7147	20.16	512
NC950F	950.12	24130	281.70	7147	27.16	695
NC975F	975.12	24765	287.70	7299	20.16	512
NC975F	975.12	24765	287.70	7299	27.16	695
NC1000F	1000.12	25400	293.70	7451	20.16	512
NC1000F	1000.12	25400	293.70	7451	27.16	695

ALL DIMENSIONS ARE APPROXIMATE.
ALSO REFER TO CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION.