

# Product data sheet

Specifications

SQUARE D



Load center, QO, 1 phase, 60 spaces, 72 circuits, 200A convertible main breaker, PoN, NEMA1, combo cover

QO160M200PC

Product availability: Stock - Normally stocked in distribution facility

## Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Combination flush/surface cover

## Complementary

Tightening Torque	Cover 20 lb.in
PoN Convertible Mains (lugs)	PoN Convertible Mains (breaker)
Rated Current	200 A
Number of Spaces	60
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	72
Maximum Number of Tandem Breakers	12
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 4...250 kcmil aluminium/copper
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Lugs
Busbar Material	Tin plated copper: busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	24
Height	43.1 in (1096 mm)
Width	14.3 in (362 mm)

## Environment

Enclosure Rating	NEMA 1 indoor enclosure
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

## Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Category</b>	US1DE3A10001
<b>Discount Schedule</b>	DE3A
<b>GTIN</b>	785901447528
<b>Returnability</b>	Yes
<b>Country of origin</b>	US

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	5.70 in (14.478 cm)
<b>Package 1 Width</b>	16.20 in (41.148 cm)
<b>Package 1 Length</b>	43.50 in (110.490 cm)
<b>Package weight(Lbs)</b>	39.591 lb(US) (17.958 kg)
<b>Unit Type of Package 2</b>	PAL
<b>Number of Units in Package 2</b>	14
<b>Package 2 Height</b>	42.50 in (107.950 cm)
<b>Package 2 Width</b>	40.00 in (101.600 cm)
<b>Package 2 Length</b>	48.00 in (121.920 cm)
<b>Package 2 Weight</b>	319.201 lb(US) (144.787 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

EU RoHS Directive

Under investigation

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

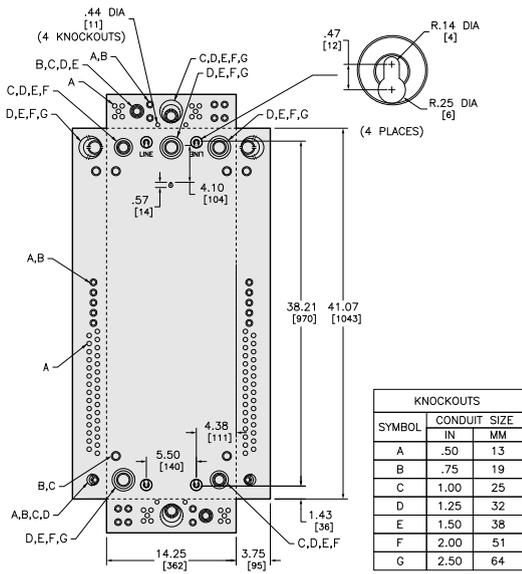


ALL DIMENSIONS ARE APPROXIMATE.  
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

---

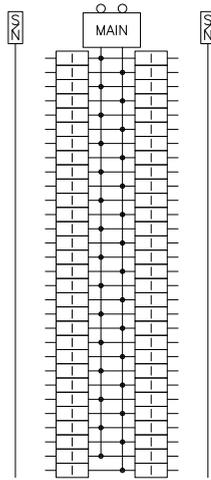

QO160M200PC