

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, QO, 35A, 3 pole, 120/240VAC, 10kA, plug in

QO335

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|-----------------------|--------------------------------------|
| Product | Miniature circuit-breaker |
| Range | QO |
| Current Rating | 35 A |
| Voltage Rating | 120/240 V AC 240 V AC 120 V AC |
| Mounting Type | Plug-in |
| Number of Poles | 3P |
| Circuit Breaker Type | Standard |
| Ratings | HACR rated |
| Electrical Connection | Box lugs |

Complementary

| | |
|------------------------|--|
| Interrupt Rating | 10 kA 120/240 V AC 10 kA 240 V AC 10 kA 120 V AC |
| Number of Panel Spaces | 3 |
| Wire Size | AWG 8...AWG 2 copper or aluminium |
| Tightening Torque | 40.7 lbf.in (4.6 N.m) |
| Height | 3.0 in (76 mm) |
| Width | 2.2 in (57 mm) |
| Depth | 2.9 in (74 mm) |
| Net Weight | 0.809 lb(US) (0.367 kg) |

Environment

| | |
|----------------|------------------|
| Certifications | UL Listed CSA |
| Ambient Rating | 104 °F (40 °C) |

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US1DE2A00012 |
| Discount Schedule | DE2A |
| GTIN | 785901012474 |
| Returnability | Yes |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|-------------------|----|
| Country of origin | MX |
|-------------------|----|

Packing Units

| | |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
|------------------------|-----|

| | |
|-----------------------|---|
| Nbr. of units in pkg. | 1 |
|-----------------------|---|

| | |
|------------------|--------------------|
| Package 1 Height | 2.20 in (5.588 cm) |
|------------------|--------------------|

| | |
|-----------------|--------------------|
| Package 1 Width | 3.10 in (7.874 cm) |
|-----------------|--------------------|

| | |
|------------------|--------------------|
| Package 1 Length | 3.20 in (8.128 cm) |
|------------------|--------------------|

| | |
|---------------------|---------------------|
| Package weight(Lbs) | 12.96 oz (367.41 g) |
|---------------------|---------------------|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 20

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant

SCIP Number Af42fb01-813d-40c0-ae28-b8b3299dbc99

REACH Regulation [REACH Declaration](#)

Halogen content performance Halogen free product

Use Again

Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Technical Illustration

Dimensions

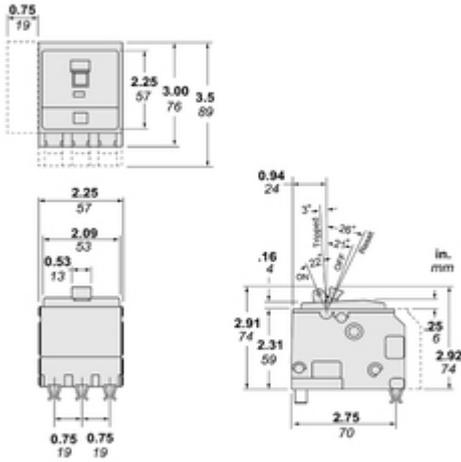


Image of product / Alternate images

Alternative

Technical Benefits Thermal Magnetic Breaker



-  Miniature circuit breaker rated at 35A
-  Protects against overloads and short-circuits
-  Product characteristics conformity is certified by the Underwriters Laboratories (UL)
-  The current capacity that this circuit breaker is able to interrupt before breaking is 10kA
-  Quickly identify tripped breakers with our Visi-Trip indicator
-  Compatible with QO 3 phase NQ/NQOD panelboards with 3 spaces

Compatible products

QO 35 Amp 3 Pole Plug In Circuit Breaker
MFG Model Number: QO335CP



Compatible with Square D QO 3 phase electrical panels with 3 spaces



HL01CP QO1HPLCP