

Product data sheet

Specifications



Mini circuit breaker, QO, 45A, 2 pole, 120/240VAC, 10kA, bolt on

QOB245

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	45 A
Voltage Rating	120/240 V AC 120 V AC
Mounting Type	Bolt-on
Number of Poles	2P
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Box lugs

Complementary

Interrupt Rating	10 kA 120/240 V AC 10 kA 120 V AC
Number of Panel Spaces	2
Wire Size	AWG 8...AWG 2 copper or aluminium
Tightening Torque	44.3 lbf.in (5 N.m)
Height	3.1 in (79 mm)
Width	1.5 in (38 mm)
Depth	2.9 in (74 mm)
Net Weight	0.600 lb(US) (0.272 kg)

Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

Ordering and shipping details

Category	US10DE200015
Discount Schedule	0DE2
GTIN	785901368304
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.60 in (4.064 cm)
Package 1 Width	3.50 in (8.89 cm)
Package 1 Length	3.50 in (8.89 cm)
Package weight(Lbs)	9.600 oz (272.155 g)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	19
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
SCIP Number	Af42fb01-813d-40c0-ae28-b8b3299dbc99
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free product

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

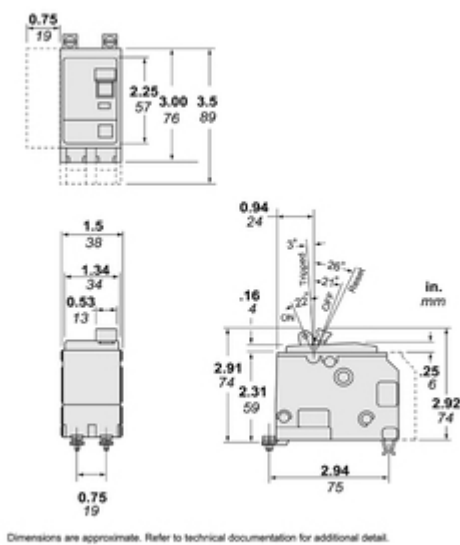

Dimensions are approximate. Refer to technical documentation for additional detail.

Image of product / Alternate images

Alternative

Technical Benefits

Thermal Magnetic Breaker



Miniature circuit breaker rated at 45A



Protects against overloads and short-circuits



Product characteristics conformity is certified by the Underwriters Laboratories (UL)



The current capacity that this circuit breaker is able to interrupt before breaking is 10kA



Bolt-On Type with Visi-Trip Indicator to quickly identify trips



Compatible with QO NQ/NQOD panelboards with 2 spaces



Compatible products

QO 45 Amp 2 Pole Bolt On Circuit Breaker

MFG Model Number: QOB245CP





Compatible with Square D NQ or NQOD panelboards with 2 spaces



HL01CP QO1HPLCP



Jul 22, 2025

Life Is On | Schneider Electric

5