

# Product data sheet

Specifications

SQUARE D



Tandem mini circuit breaker, QO,  
2 x 1 pole at 15A, 120/240VAC,  
10kA, plug in

QOT1515

Product availability: Stock - Normally stocked in distribution facility

## Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	15 A
Voltage Rating	120/240 V AC
Mounting Type	Plug-in
Number of Poles	1P
Circuit Breaker Type	Tandem
Ratings	HACR rated
Electrical Connection	Pressure plate

## Complementary

Interrupt Rating	10 kA 120/240 V AC
Number of Panel Spaces	1
Wire Size	AWG 14...AWG 8 copper AWG 12...AWG 8 aluminium
Tightening Torque	24.8 lbf.in (2.8 N.m)
Height	3.2 in (82 mm)
Width	0.7 in (19 mm)
Depth	2.9 in (74 mm)
Net Weight	0.320 lb(US) (0.145 kg)

## Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

## Ordering and shipping details

Category	US1DE2A00004
Discount Schedule	DE2A
GTIN	785901418009
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.70 in (1.778 cm)
Package 1 Width	3.50 in (8.89 cm)
Package 1 Length	3.20 in (8.128 cm)
Package weight(Lbs)	5.12 oz (145.15 g)
Unit Type of Package 2	PAL
Number of Units in Package 2	3600
Package 2 Height	40.00 in (101.6 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	1240.000 lb(US) (562.454 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 18

Environmental Disclosure [Product Environmental Profile](#)

### Use Better

#### Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant

SCIP Number Af42fb01-813d-40c0-ae28-b8b3299dbc99

REACH Regulation [REACH Declaration](#)

Halogen content performance Halogen free product

### Use Again

#### Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Technical Illustration

Dimensions

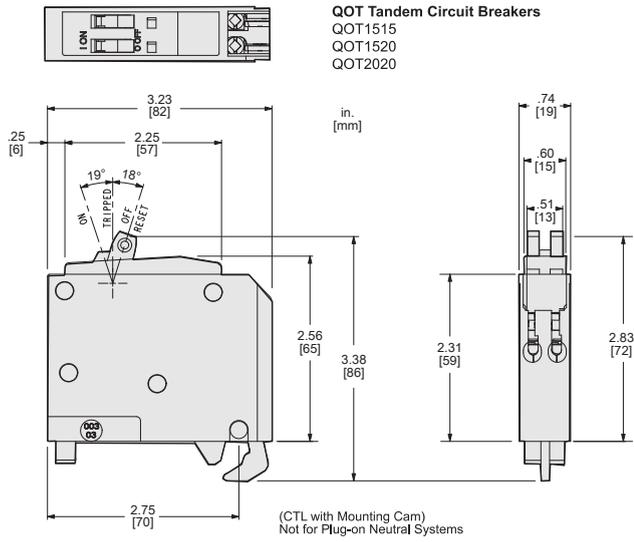


Image of product / Alternate images

Alternative

---

QO™  
QOT1515C  
**15/15A**  
120/240 VAC ~ 50/60 Hz  
10,000 AIR/A nom.I

 **2** Single Poles  
Polos Sencillos  
Pôles

 **1** Space Required  
Espacio Requerido  
Espace  
Nécessaire



Allows two - 1 Pole  
circuits in one space



Visi-Trip™ indicates  
tripped circuit



Overload and Short  
Circuit protection

