

# Product data sheet

Specifications

**SQUARE D**



## Mini circuit breaker, QOU, 40A, 3 pole, 240VAC, 10kA

QOU340

**Product availability: Stock - Normally stocked in distribution facility**

### Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR rated

### Complementary

Line Rated Current	40 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 240 V AC 120 V AC 48 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	2.25 in (57.15 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

### Environment

Product Certifications	UL Listed CSA IEC
------------------------	-------------------------

### Ordering and shipping details

Category	US10DE200900
Discount Schedule	0DE2
GTIN	785901418955
Returnability	Yes
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Package 1 Height</b>	3.50 in (8.890 cm)
<b>Package 1 Width</b>	2.60 in (6.604 cm)
<b>Package 1 Length</b>	4.70 in (11.938 cm)
<b>Package weight(Lbs)</b>	18.080 oz (512.559 g)
<b>Unit Type of Package 2</b>	CAR
<b>Number of Units in Package 2</b>	20
<b>Package 2 Height</b>	3.80 in (9.652 cm)
<b>Package 2 Width</b>	13.40 in (34.036 cm)
<b>Package 2 Length</b>	20.60 in (52.324 cm)
<b>Package 2 Weight</b>	22.970 lb(US) (10.419 kg)
<b>Unit Type of Package 3</b>	PAL
<b>Number of Units in Package 3</b>	840
<b>Package 3 Height</b>	40.00 in (101.600 cm)
<b>Package 3 Width</b>	40.00 in (101.600 cm)
<b>Package 3 Length</b>	48.00 in (121.920 cm)
<b>Package 3 Weight</b>	956.0001 lb(US) (433.634 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **20**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **Yes**

[EU RoHS Directive](#) **Compliant**

SCIP Number **Af42fb01-813d-40c0-ae28-b8b3299dbc99**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

Halogen content performance **Halogen free product**

## Use Again


### Repack and remanufacture

Circularity Profile **No need of specific recycling operations**

Take-back **No**

Technical Illustration

Dimensions

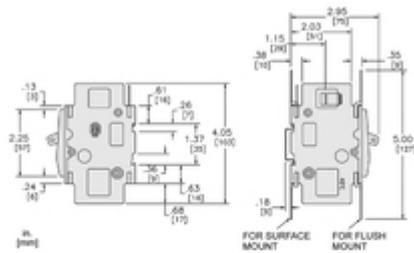

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG  
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG  
 TYP. BOTH ENDS FOR ALL CTS SHOWN PER ARTICLE 430-1-1 (B) NEC

