



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Rated Cross Section: **4 mm²**

Primary Product Color: **Orange**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A3-B3
Number of Levels	1
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (CSA)	20 A
Power Loss	1 W
Short-Time Withstanding Current Rating @ 1s	480 A
Voltage Rating (IEC)	1000 V
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Voltage Rating (CSA)	600 V
Dielectric Test Voltage	2200 V
Current Rating (UL)	20 A
Current Rating (IEC)	32 A



Body Features

Product Weight	8.8 g[.346 oz]
Primary Product Color	Orange

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Screw Clamp	24 – 16 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	24 – 12 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	24 – 14 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 – 4 mm²
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	.2 – 1.5 mm²
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 – 12 AWG
Wire Stripping Length	10.5 mm[.413 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	.2 – 1.5 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	47.3 mm
Product Length	47.3 mm[1.86 in]
Product Height	53 mm
Rated Cross Section	4 mm²
Product Spacing	5.2 mm[.205 in]

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

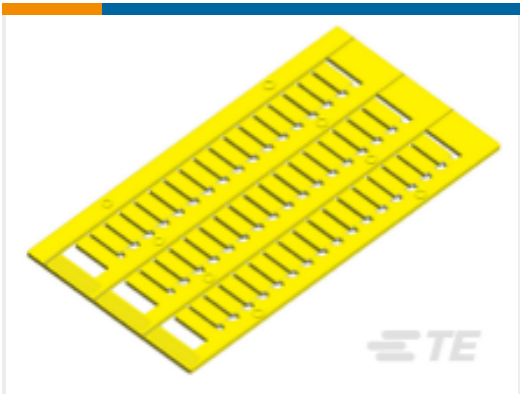

TE Part # 1SNK140004R0000
MC512-YL



TE Part # 1SNK149999R0000
MC512PA




TE Part # 1SNK505910R0000
ES4





TE Part # 1SNK900001R0000
BAM4

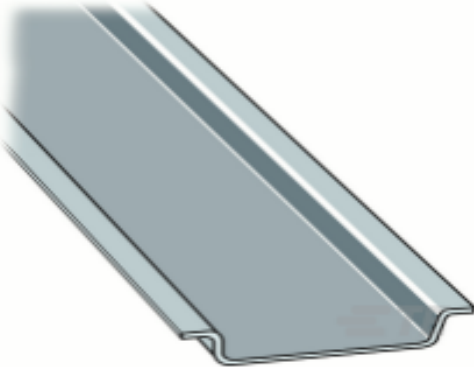

 TE Part # 1SNK900002R0000 BAZ1	 TE Part # 1SNK900101R0000 CS	 TE Part # 1SNK900103R0000 CS-R1	 TE Part # 1SNK900200R0000 TC5
 TE Part # 1SNK900201R0000 TC5-R1	 TE Part # 1SNK900600R0000 SHBS	 TE Part # 1SNK900603R0000 JB85-3	 TE Part # 1SNK900606R0000 LH-J
 TE Part # 1SNK900609R0000 PROCAP5	 TE Part # 1SNK900611R0000 UMH	 TE Part # 1SNK900618R0000 PL5	 TE Part # 1SNK900624R0000 KCO
 TE Part # 1SNK905302R0000 JB5-2	 TE Part # 1SNK905303R0000 JB5-3	 TE Part # 1SNK905310R0000 JB5-10	 TE Part # 1SNA164800R0300 PR3.G2

Customers Also Bought

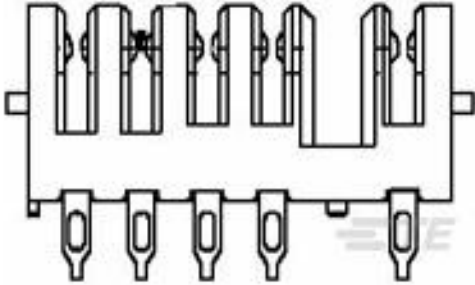 TE Part #1565986-1 REC ASSY,2.5 SLIM BATTERY CONN	 TE Part #1SNK505010R0000 ZS4	 TE Part #1SNK505020R0000 ZS4-BL	 TE Part #1SNK505060R0000 ZS4-YL
---	--	---	---



TE Part #1SNK505061R0000
ZS4-GN

TE Part #TAD14241311-002
M12D4-MR-PVC TYPE B RED-1.0M

TE Part #1SNK140011R0000
MC512PA 1->10 (x10) Horizontal

TE Part #1SNK145011R0000
MC512PA 1->100 Horizontal

TE Part #1676665-2
RN 0805 20R5 0.1% 10PPM 1K RL

TE Part #1SNA179535R2300
BRT125A

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK505030R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK505030R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK505030R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

English

ZS4-OR

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Agency Approvals

CE Declaration of Conformity

English

1SNK505030R0000

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, 12AWG Rated
Cross Section, 4mm² Rated Cross Section, Orange

