



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Rated Cross Section: **6 mm²**

Primary Product Color: **Gray**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A5
Number of Levels	1
Number of Poles	2
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	50 A
Dielectric Test Voltage	2000 V
Short-Time Withstanding Current Rating @ 1s	720 A



Voltage Rating (IEC)	800 V
Current Rating (UL)	50 A
Current Rating (IEC)	41 A
Voltage Rating	800 VAC

Body Features

Product Weight	12.8 g[.451 oz]
Primary Product Color	Gray

Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	7.1 in-lbs
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.5 – 10 mm ²
Wire Stripping Length	12 mm[.472 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 6 mm ²
Product Depth	40.5 mm
Product Width	8 mm[.314 in]
Product Length	40.5 mm
Product Height	44.5 mm
Rated Cross Section	6 mm ²
Product Spacing	8 mm[.314 in]
Wire Size	6 mm ²

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Operation/Application

--	--



Circuit Application	Signal
---------------------	--------

Industry Standards

IP Rating	IP10
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>













EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (3.5% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

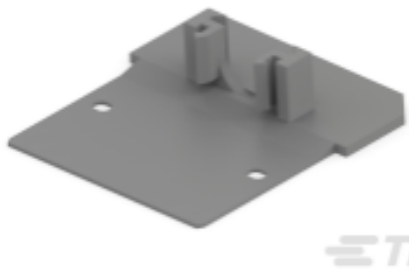

 TE Part # 1SNA113003R1000 SCM6	 TE Part # 1SNA114825R0500 SCFM6	 TE Part # 1SNA116538R1700 PC8-2	 TE Part # 1SNA163313R2400 PC8-10
 TE Part # 1SNA173060R0000 DCO	 TE Part # 1SNA195219R2700 M6/8.3	 TE Part # 1SNA114205R2000 AD2.5	 TE Part # 1SNA116795R1100 SCFCV1-2
 TE Part # 1SNA118368R1600 FEM6	 TE Part # 1SNA118707R0300 SCF6	 TE Part # 1SNA167860R0100 FC4	 TE Part # 1SNA173888R2000 BP8.A4
 TE Part # 1SNA176816R1200 CPV1-2	 TE Part # 1SNA187312R1400 CPM	 TE Part # 1SNA236500R0600 RCT810	 TE Part # 1SNA399903R0200 BADL
 TE Part # 1SNA103619R0400 SCFEX1	 TE Part # 1SNA103620R0100 SCFEX3	 TE Part # 1SNA107038R2500 EPU6	 TE Part # 1SNA114202R2500 SCF61


Also in the Series | ENTRELEC SNA

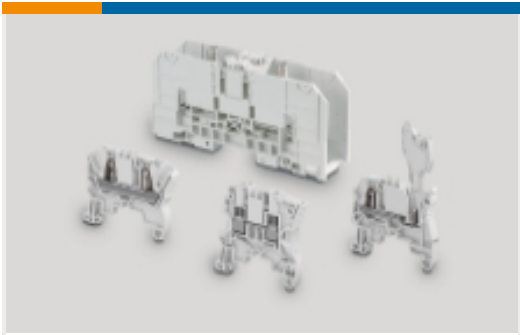

Modular Terminal Blocks(182)



Terminal Block & Strip Conducting Accessories(26)

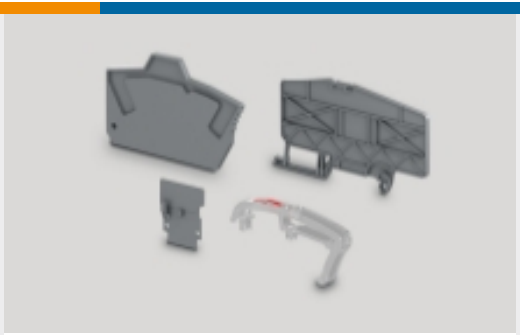

Terminal Block & Strip Insulating Accessories(14)

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNA115219R2600_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115219R2600_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNA115219R2600_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

M6/8.4

English

ENTRELEC Terminal Blocks Catalogue (RUS)