




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XCKJ110513H7

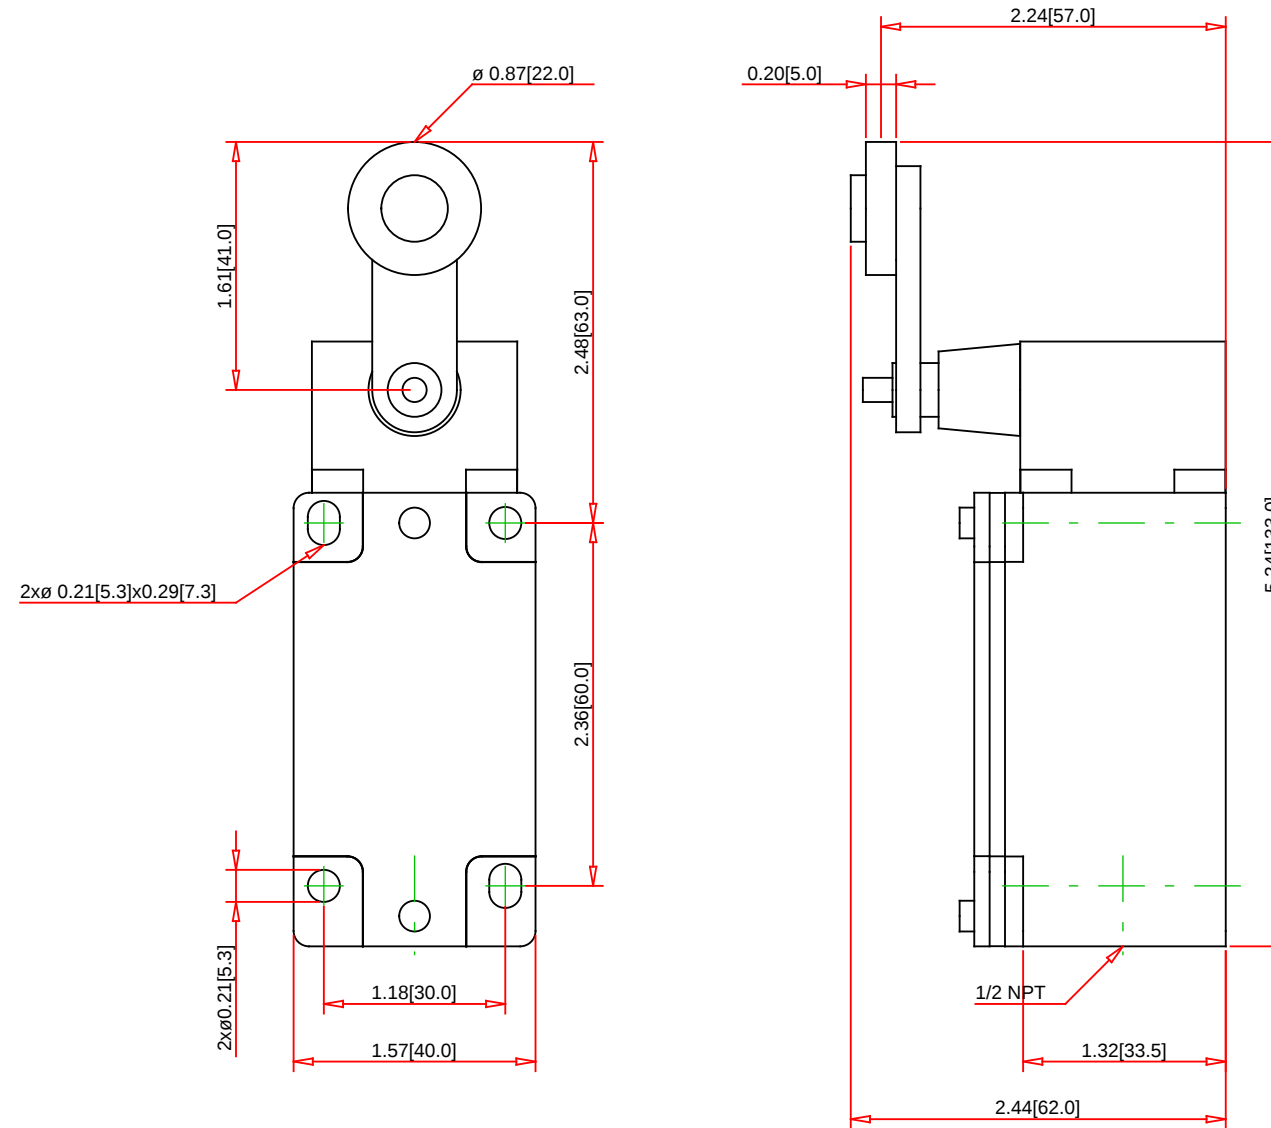

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type:	Screw Clamp
Enclosure Rating:	NEMA 1/2/4/12; IP66
Approvals:	UL # E39281 CCN NKCR - CSA # LR44087 - Class 3211-03 - CE Marked
Weight:	0.490 kg (1.08 lb)
Conforming to Standards:	CENELEC EN 50041
RoHS:	Yes
Operating Temperature Range:	-13 to 158 ° F
Shock Resistance:	50G
Vibration Resistance:	25G (10-500Hz)
Max. Actuation Speed :	1.5 m/s
Repeat Accuracy:	
Operating Torque/Force:	33.3 Inch-Ounces (0.23Nm)

Specification:

Description:	XCKJ Limit Switch Steel roller lever, plug-in body
Body Style/Type Description:	IEC OsiSense Limit Switches XCKJ Heavy Duty SemiModular 40mm Metal Body
Head Type:	ZCKE05 Rotary + ZCKY13 Steel roller lever
Lever Arms:	ZCKY13 Steel roller lever
Body with Contact Type:	ZCKJ11H7 Single pole C/O Snap Action, plug-in body
Conduit Thread:	1/2" NPT
Ampere Rating Continuous:	10A
Maximum Voltage Rating:	240VAC/250VDC
Actuation:	CW and CCW
Actuator Action:	Momentary
Lever Arm Length:	41mm
Roller Dimension:	0.9 x 0.2 in (23x5mm)
Roller Material:	Steel
Contact Configuration:	1 N.O./1 N.C.
Contact Operation:	Snap Action
Connection Type:	Conduit Entrance (0.5 Inch NPT)
Head Material:	Zamak
Positive Opening:	Yes
Cable Length:	