



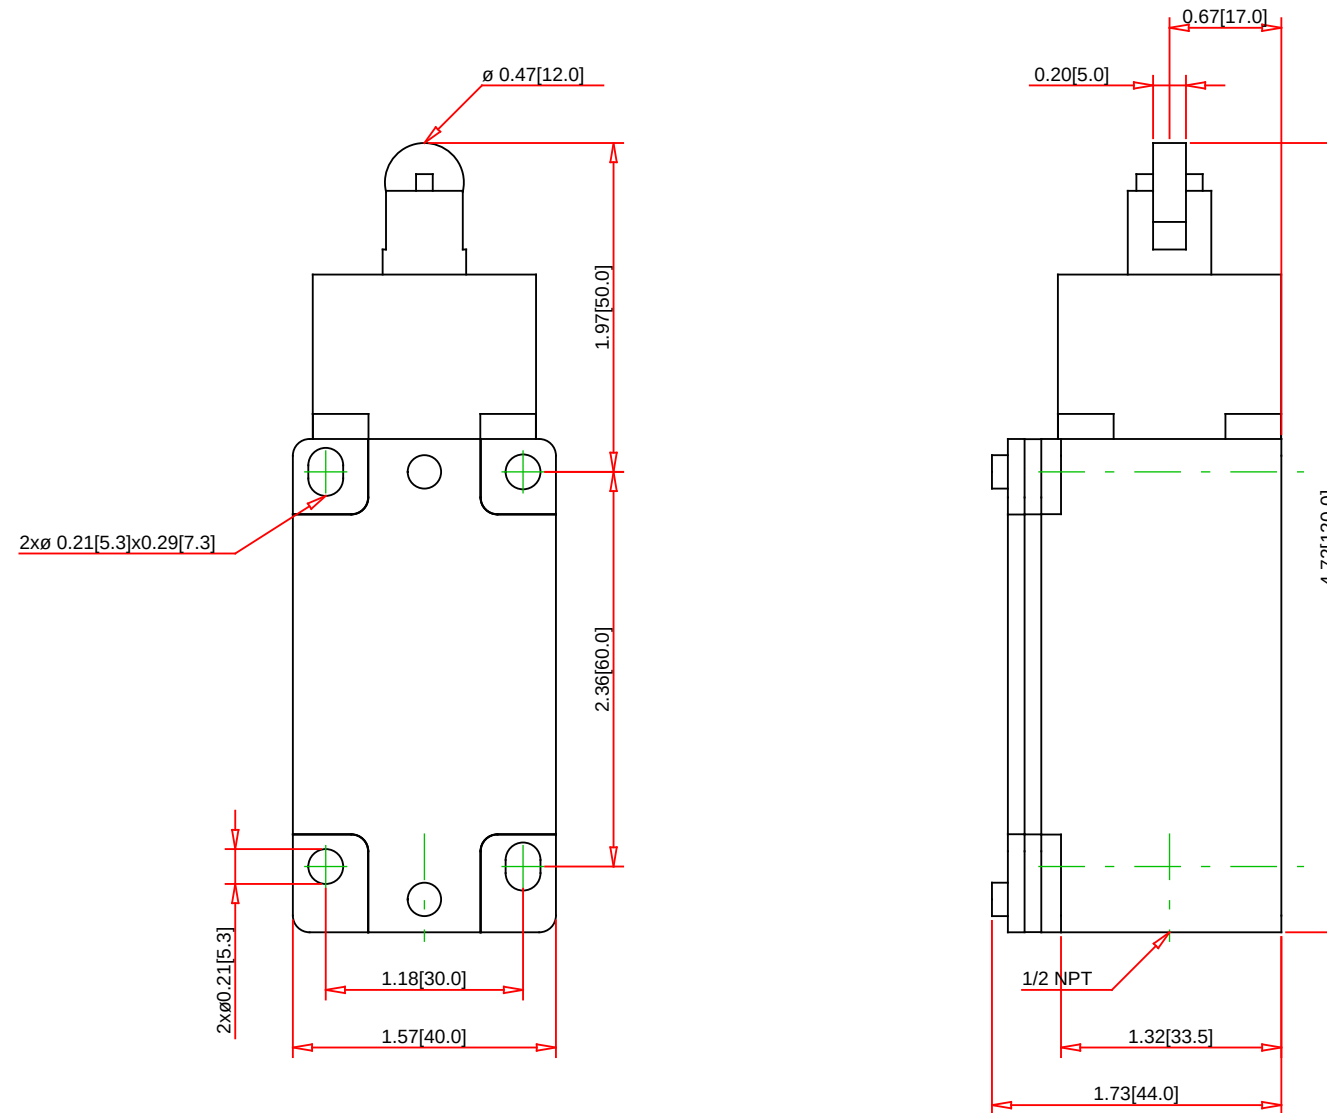

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCKJ567H7



Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 1/2/4/12; IP66
Approvals: UL # E39281 CCN NKCR - CSA # LR44087 - Class 3211-03 - CE Marked
Weight: 0.455 kg (1.0 lb)
Conforming to Standards: CENELEC EN 50041
RoHS: Yes
Operating Temperature Range: -13 to 158 ° F
Shock Resistance: 50G
Vibration Resistance: 25G (10-500Hz)
Max. Actuation Speed : 1 m/s
Repeat Accuracy: 0.1 mm on the tripping points
Operating Torque/Force: 33.3 Inch-Ounces (0.23Nm)

Specification:

Description: XCKJ Limit Switch Steel roller plunger
Body Style/Type Description: IEC OsiSense Limit Switches XCKJ Heavy Duty SemiModular 40mm Metal Body
Head Type: ZCKE67 Reinforced steel roller plunger
Lever Arms:
Body with Contact Type: ZCKJ5H7 2-pole N.O./N.C.Break before make, slow break, non plug-in body
Conduit Thread: 1/2" NPT
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: Horizontal
Actuator Action: Momentary
Lever Arm Length:
Roller Dimension: 0.63 x 0.12 in (16x3mm)
Roller Material: Steel
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Break before make, slow break
Connection Type: Conduit Entrance (0.5 Inch NPT)
Head Material: Zamak
Positive Opening: Yes
Cable Length: