




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCKN2102G11

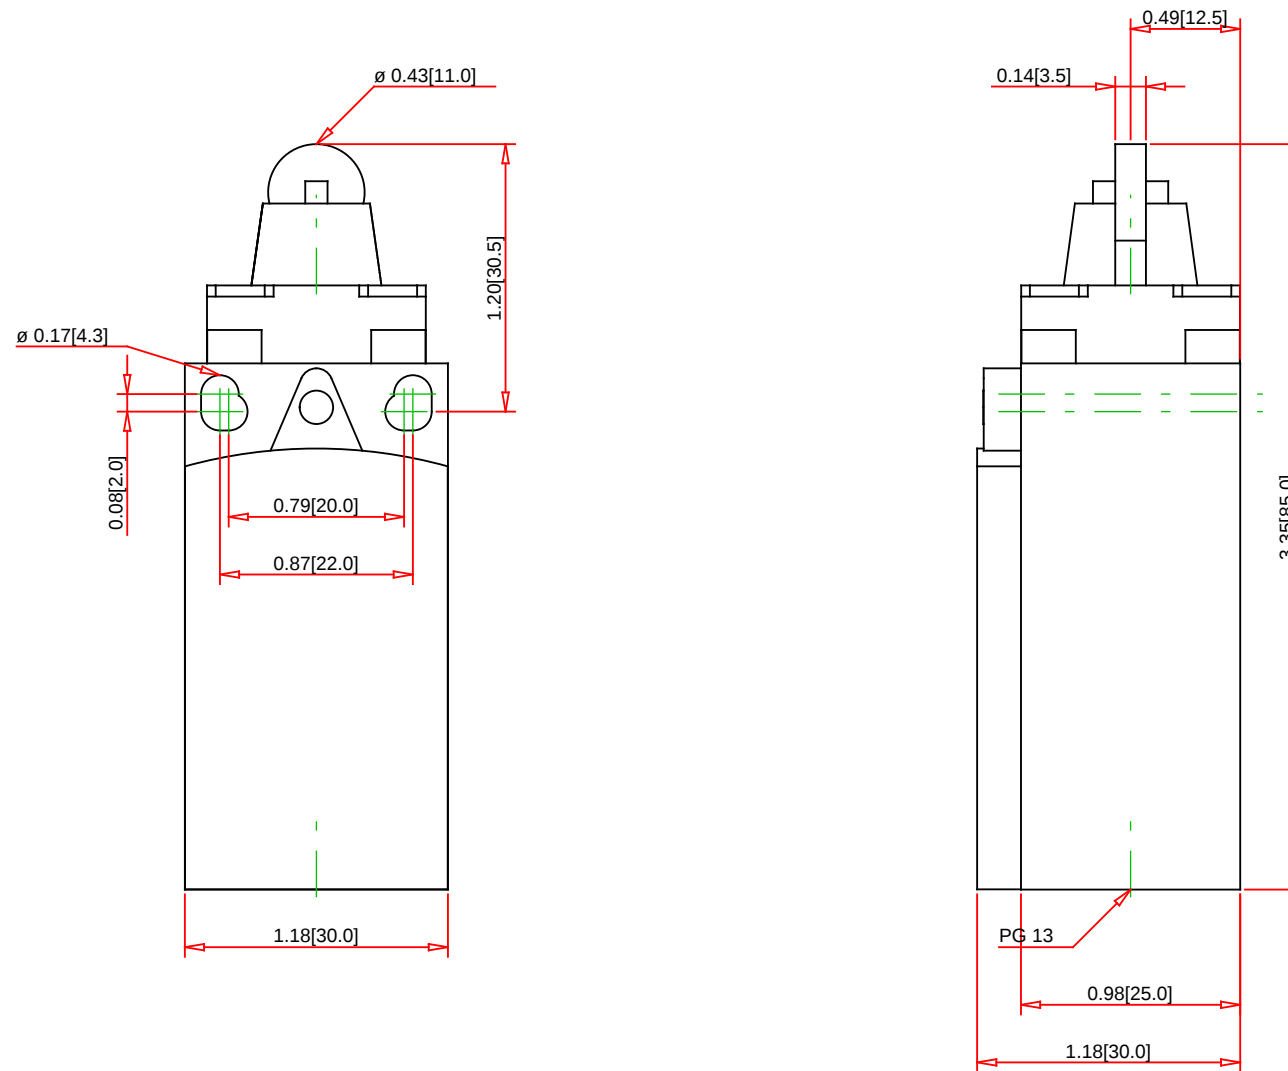

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 12, 4X Indoor; IP65
Approvals: UL # E164353 - CSA # 164581 - CE Marked
Weight: 0.065 kg (0.140 lb)
Conforming to Standards: CENELEC EN 50047
RoHS: Yes
Operating Temperature Range: -13 to 158 ° F
Shock Resistance: 50G
Vibration Resistance: 25G
Max. Actuation Speed : 0.3 m/s
Repeat Accuracy: 0.1 mm on the tripping points
Operating Torque/Force: 106 Inch-Pounds (12Nm)

Specification:

Description: XCKN Limit Switch Steel top roller plunger
Body Style/Type Description: IEC OsiSense Limit Switches XCKN Light Duty Monolithic 30mm Plastic Body
Head Type: Steel top roller plunger
Lever Arms: Metal end plunger with protective rubber boot
Body with Contact Type: 2-pole N.O./N.C. snap action
Conduit Thread: PG 11
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: Horizontal
Actuator Action: Momentary
Lever Arm Length: 11 x3.5mm
Roller Dimension: Thermoplastic
Roller Material: 1 N.O./1 N.C.
Contact Configuration: Snap Action
Contact Operation: Conduit Entrance (Pg 11)
Connection Type: Plastic
Head Material: Yes
Positive Opening: Yes
Cable Length: