




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XCKS141

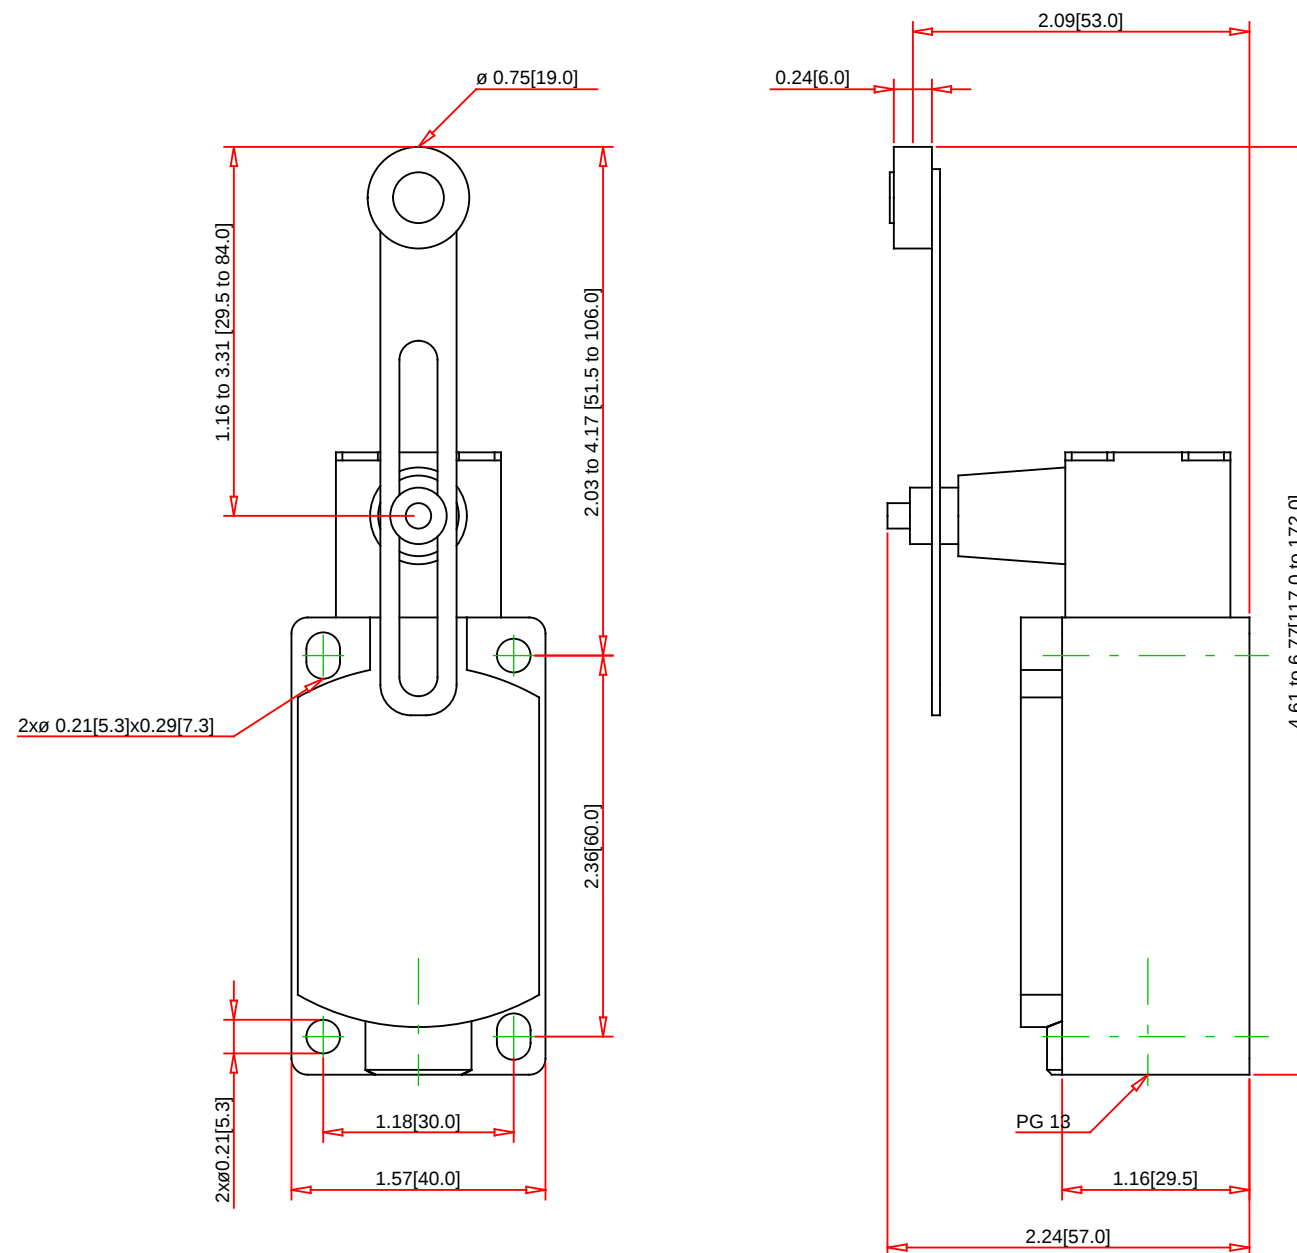

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: IP 65
Approvals: UL # E164353, CSA # LR44087-31, CE Marked
Weight: 0.155 kg (0.34 lb)
Conforming to Standards: CENELEC EN 50041
RoHS: Yes
Operating Temperature Range: -13 to 158 ° F
Shock Resistance: 50G
Vibration Resistance: 25G (10-500Hz)
Max. Actuation Speed : 1.5 m/s
Repeat Accuracy:
Operating Torque/Force: 18.40 Inch-Ounces (0.15Nm)

Specification:

Description: XCKS Limit Switch Variable length Plastic roller lever
Body Style/Type Description: IEC OsiSense Limit Switches XCKS Light Duty SemiModular 40mm Plastic Body
Head Type: ZCKD05 Rotary + ZCY41 variable length thermoplastic roller lever
Lever Arms: ZCKY41 Variable length thermoplastic roller lever
Body with Contact Type: ZCKS1 2-pole N.O./N.C. Snap Action
Conduit Thread: PG13
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: CW and CCW
Actuator Action: Momentary
Lever Arm Length: 29.4mm-84mm
Roller Dimension: 19x6mm
Roller Material: Plastic
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: PG13
Head Material: Plastic
Positive Opening: No
Cable Length: