




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XCKS149

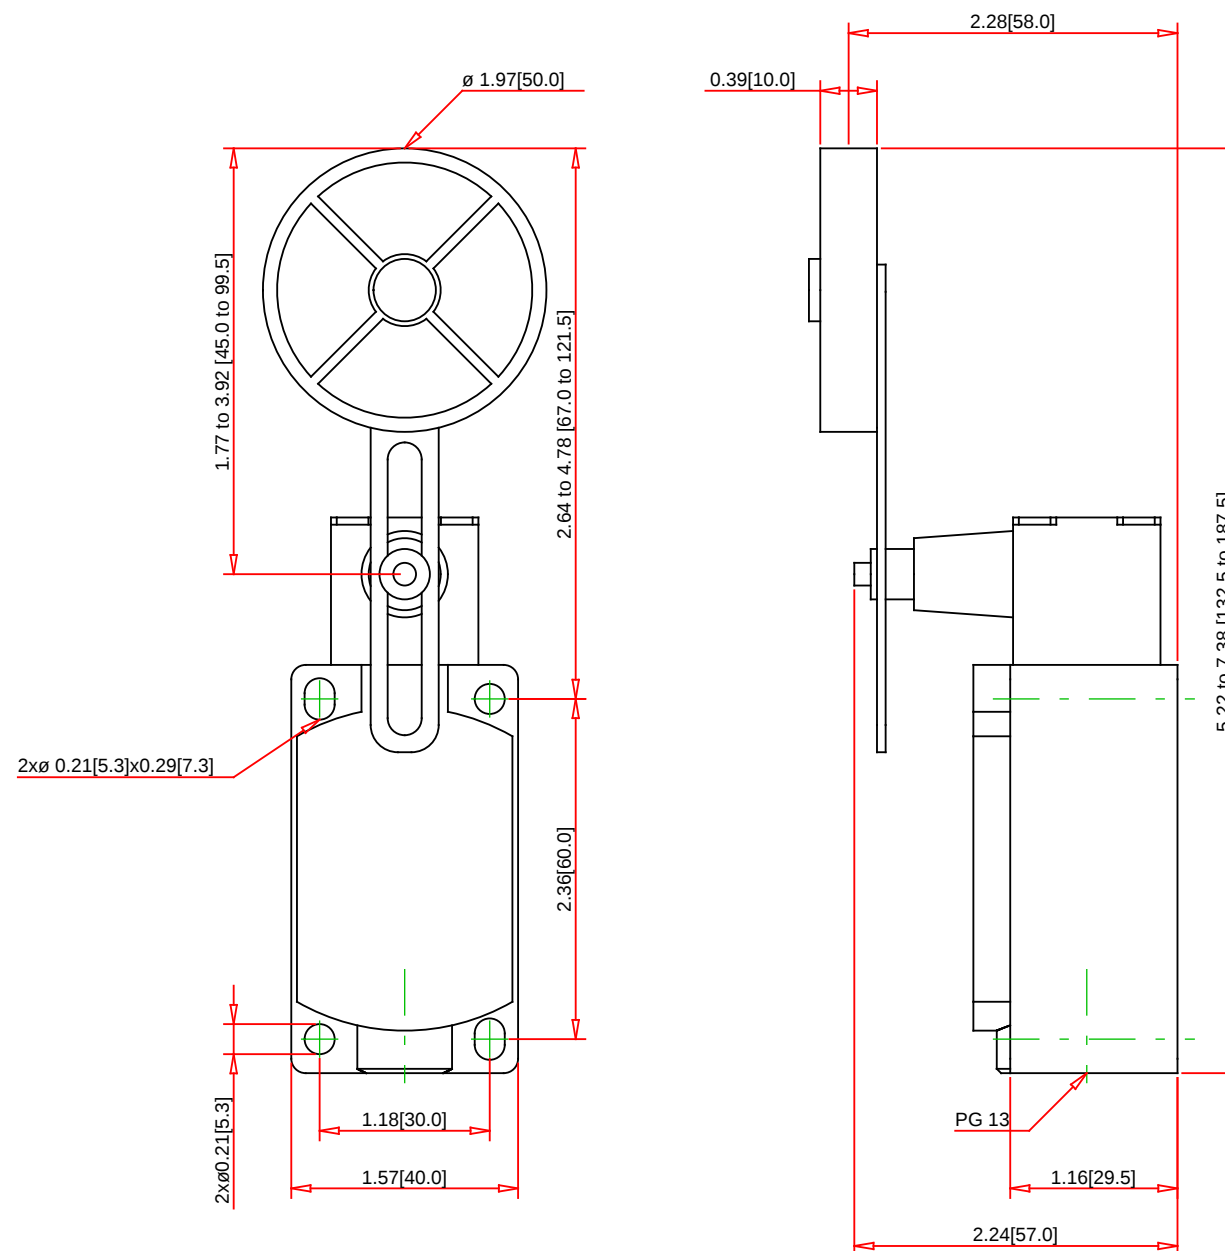

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type:	Screw Clamp
Enclosure Rating:	IP 65
Approvals:	UL # E164353, CSA # LR44087-31, CE Marked
Weight:	0.155 kg (0.34 lb)
Conforming to Standards:	CENELEC EN 50041
RoHS:	Yes
Operating Temperature Range:	-13 to 158 ° F
Shock Resistance:	50G
Vibration Resistance:	25G (10-500Hz)
Max. Actuation Speed :	1.5 m/s
Repeat Accuracy:	
Operating Torque/Force:	18.40 Inch-Ounces (0.15Nm)

Specification:

Description:	XCKS Limit Switch Variable length elastomer roller lever, Ø 50mm (1.97 in.)
Body Style/Type Description:	IEC OsiSense Limit Switches XCKS Light Duty SemiModular 40mm Plastic Body
Head Type:	ZCKD05 Rotary +ZCKY49 variable length elastomer roller lever, Ø 50 mm (1.97 in.)
Lever Arms:	ZCKY49 Variable length elastomer roller lever, Ø 50 mm (1.97 in.)
Body with Contact Type:	ZCKS1 2-pole N.O./N.C. Snap Action
Conduit Thread:	PG13
Ampere Rating Continuous:	10A
Maximum Voltage Rating:	240VAC/250VDC
Actuation:	CW and CCW
Actuator Action:	Momentary
Lever Arm Length:	45mm-99.5mm
Roller Dimension:	
Roller Material:	Plastic
Contact Configuration:	1 N.O./1 N.C.
Contact Operation:	Snap Action
Connection Type:	PG13
Head Material:	Plastic
Positive Opening:	No
Cable Length:	