

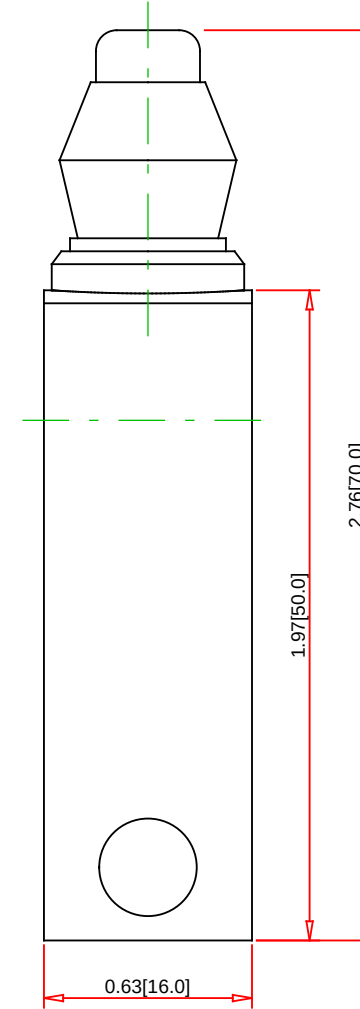


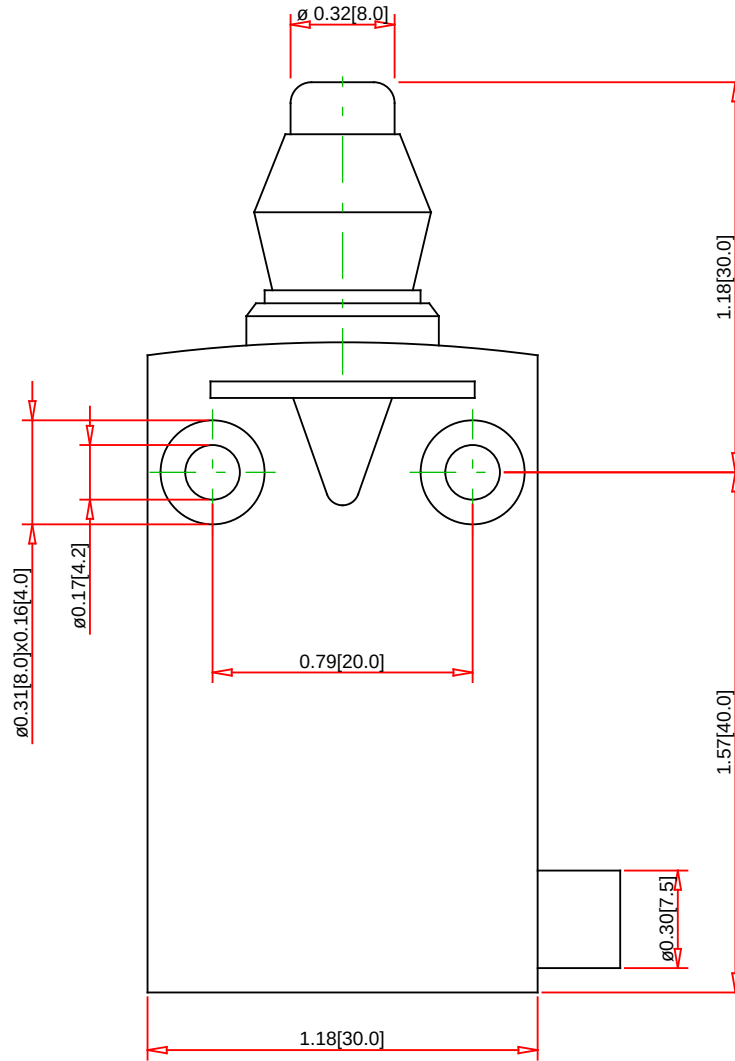

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCMD2111L1



Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type:
Enclosure Rating: NEMA 1/2/4X/6/6P/12/13; IP66/67/68
Approvals: UL # E164353 - CSA # 164581 - CE Marked
Weight: 0.160 kg (0.353 lb)
Conforming to Standards: CENELEC EN 50047
RoHS: Yes
Operating Temperature Range: -13 to 159 ° F
Shock Resistance: 25G
Vibration Resistance: 5G
Max. Actuation Speed : 0.5 m/s
Repeat Accuracy: 0.05 mm on tripping points
Operating Torque/Force: 8.5 Inch-Ounces (0.06Nm)

Specification:

Description: XCMD Limit Switch Metal end plunger with protective rubber boot
Body Style/Type Description: IEC OsiSense Limit Switches XCMD Miniature Modular 30mm Metal Body
Head Type: ZCE11 Metal end plunger with protective rubber boot
Lever Arms:
Body with Contact Type: ZCMD21 2-pole N.O./N.C. snap action
Conduit Thread: ZCMC21L1 Plug-in base with PVR cable 1 Meter
Ampere Rating Continuous: 6A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: Vertical
Actuator Action: Momentary
Lever Arm Length:
Roller Dimension:
Roller Material:
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: PVR Cable
Head Material: Zamak
Positive Opening: Yes
Cable Length: 3.2 ft (1m)