


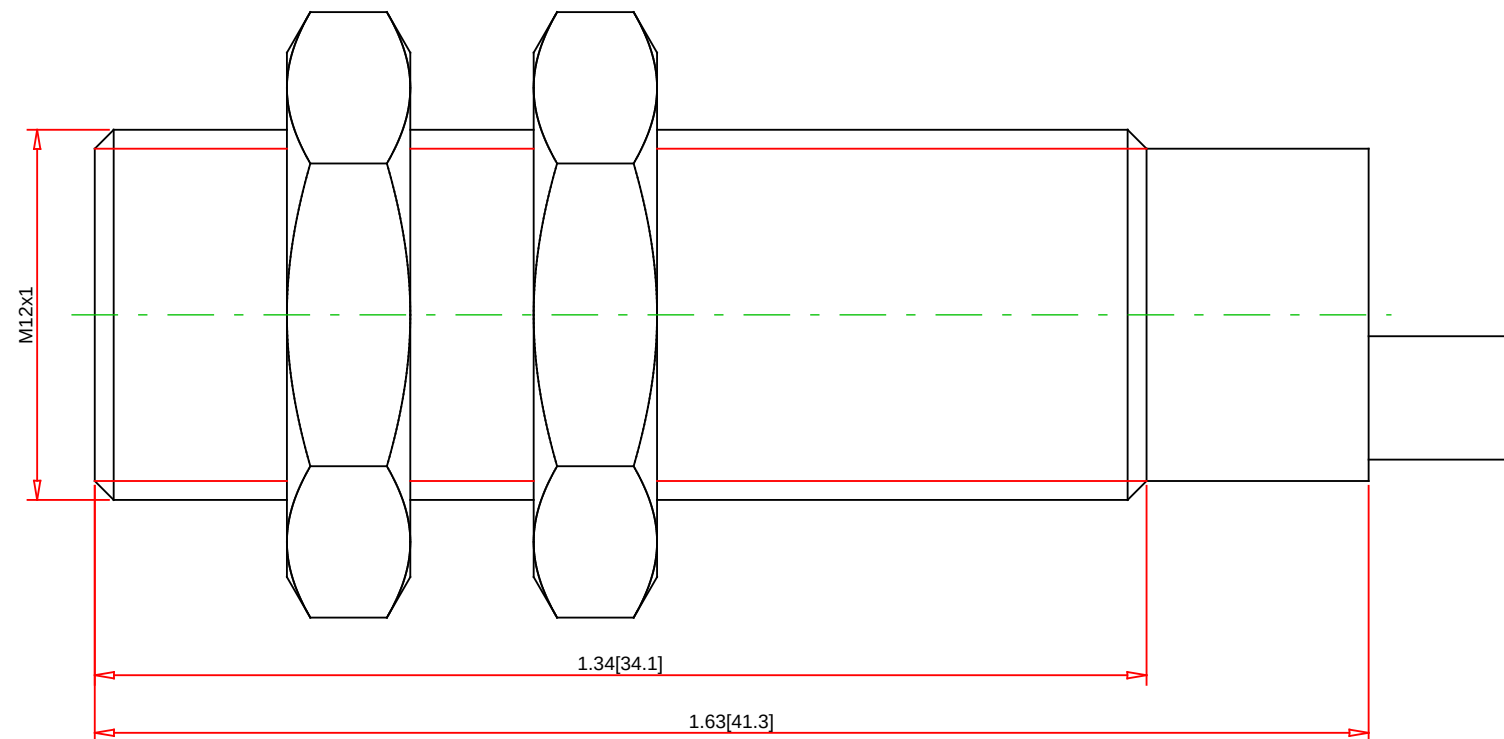

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: XS212BLPAL5	 Telemecanique Sensors Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com
Technical Information: Detecting Distance:4.0 mm (0.15 in) Circuit Type:PNP Output Mode:NO Volts Type:DC Voltage Range:12-24 VDC Max Load:100 mA Shielding:Non shielded Max Switching Frequency:1000 Hz Temp Range:-25° to 70° C (-13° to 158° F) NEMA Type:4X (indoor use only) IP Rating:IP67 Standards:UL, CE Rohs		Specification: Sensor Type:Inductive Description:Proximity Sensor, Inductive, 12 mm Barrel, 12-24 VDC, Non Shielded Body Style:Barrel Diameter:mm Housing Material:Nickel Plated Brass Cable Size:5.0 m (16.4 ft) Connector Type: Special Features:OEM Focused