

# XS518B1MBL2

Inductive proximity sensors XS, inductive sensor XS5 M18, L62mm, brass, Sn5mm, 24...240VAC/DC, cable 2 m



## Main

|                                    |                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------|
| Range of product                   | Telemecanique Inductive proximity sensors XS                                    |
| Series name                        | General purpose                                                                 |
| Sensor type                        | Inductive proximity sensor                                                      |
| Device application                 | -                                                                               |
| Sensor name                        | XS5                                                                             |
| Sensor design                      | Cylindrical M18                                                                 |
| Size                               | 62 mm                                                                           |
| Body type                          | Fixed                                                                           |
| Detector flush mounting acceptance | Flush mountable                                                                 |
| Material                           | Metal                                                                           |
| Type of output signal              | Discrete                                                                        |
| Wiring technique                   | 2-wire                                                                          |
| [Sn] nominal sensing distance      | 0.20 in (5 mm)                                                                  |
| Discrete output function           | 1 NC                                                                            |
| Output circuit type                | AC/DC                                                                           |
| Electrical connection              | cable                                                                           |
| Cable length                       | 6.56 ft (2 m)                                                                   |
| [Us] rated supply voltage          | 24...240 V AC/DC reverse polarity protection                                    |
| Switching capacity in mA           | 5...200 mA DC<br>5...300 mA AC                                                  |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529<br>IP69K conforming to DIN 40050 |

## Complementary

|                          |                              |
|--------------------------|------------------------------|
| Thread type              | M18 x 1                      |
| Detection face           | Frontal                      |
| Front material           | PPS                          |
| Enclosure material       | Nickel Plated Brass          |
| Operating zone           | 0.00...0.16 in (0...4 mm)    |
| Differential travel      | 1...15% of Sr                |
| Cable composition        | 2 x 0.34 mm <sup>2</sup>     |
| Wire insulation material | PvR                          |
| Status LED               | Output state 1 LED yellow)   |
| Supply voltage limits    | 20...264 V AC/DC             |
| Maximum residual current | 0.8 mA open state            |
| Switching frequency      | <= 1000 Hz DC<br><= 25 Hz AC |
| Maximum voltage drop     | <5.5 V closed)               |
| Maximum delay first up   | 25 ms                        |
| Maximum delay response   | 0.5 ms                       |
| Maximum delay recovery   | 0.5 ms                       |
| Marking                  | CE                           |
| Threaded length          | 2.05 in (52 mm)              |
| Height                   | 0.71 in (18 mm)              |

|            |                       |
|------------|-----------------------|
| Length     | 2.44 in (62 mm)       |
| Net Weight | 0.26 lb(US) (0.12 kg) |

## Environment

|                                       |                                         |
|---------------------------------------|-----------------------------------------|
| Product certifications                | CSA<br>UL                               |
| Ambient air temperature for operation | -13...158 °F (-25...70 °C)              |
| Ambient air temperature for storage   | -40...185 °F (-40...85 °C)              |
| Vibration resistance                  | 25 gn +/- 2 mm 10...55 Hz)IEC 60068-2-6 |
| Shock resistance                      | 50 gn 11 ms IEC 60068-2-27              |

## Ordering and shipping details

|                       |                            |
|-----------------------|----------------------------|
| Category              | 22486 - SENSORS, PROXIMITY |
| Discount Schedule     | DS2                        |
| GTIN                  | 00785901584452             |
| Nbr. of units in pkg. | 1                          |
| Package weight(Lbs)   | 0.27 lb(US) (0.12 kg)      |
| Returnability         | Yes                        |
| Country of origin     | FR                         |

## Packing Units

|                              |                        |
|------------------------------|------------------------|
| Unit Type of Package 1       | PCE                    |
| Package 1 Height             | 1.42 in (3.6 cm)       |
| Package 1 width              | 4.29 in (10.9 cm)      |
| Package 1 Length             | 5.35 in (13.6 cm)      |
| Unit Type of Package 2       | BAG                    |
| Number of Units in Package 2 | 1                      |
| Package 2 Weight             | 4.30 oz (122 g)        |
| Package 2 Height             | 0.79 in (2 cm)         |
| Package 2 width              | 7.87 in (20 cm)        |
| Package 2 Length             | 5.91 in (15 cm)        |
| Unit Type of Package 3       | S02                    |
| Number of Units in Package 3 | 22                     |
| Package 3 Weight             | 5.71 lb(US) (2.588 kg) |
| Package 3 Height             | 5.91 in (15 cm)        |
| Package 3 width              | 11.81 in (30 cm)       |
| Package 3 Length             | 15.75 in (40 cm)       |


## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                                                                 |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                                                                                                                    |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                                                                                                               |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                                                                                                                     |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                                                                                                                                                                                                                                                                                                           |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

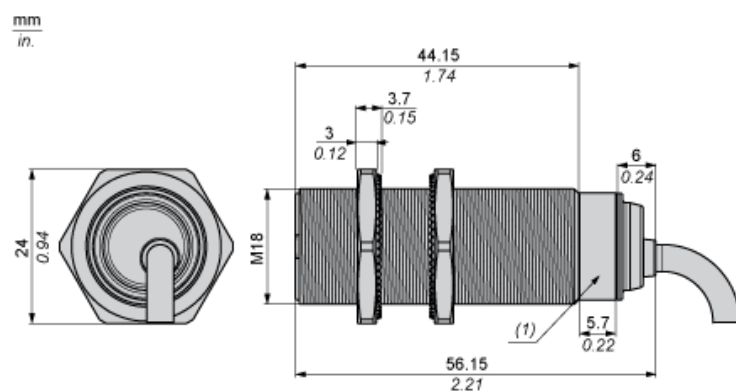

(1) LED

## Minimum Mounting Distances

Side by side



e (1) 16 mm/0.63 in.

≥

Face to face



e (2) 100 mm/3.94 in.

≥

Facing a metal object



e (3) 25 mm/0.98 in.

≥

## Mounting



(1) Bending cable: 4 x external cable diameter

## Wiring Schemes

### 2-Wire AC or DC

NC output



BU : Blue  
BN : Brown

---

Performance Curves

---

Standard Steel Target : 18x18x1 mm



- (1) Pick-up points
- (2) Drop-out points (object approaching from the side)
- (y) Sensing distance in mm