




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XS618B1MAL10

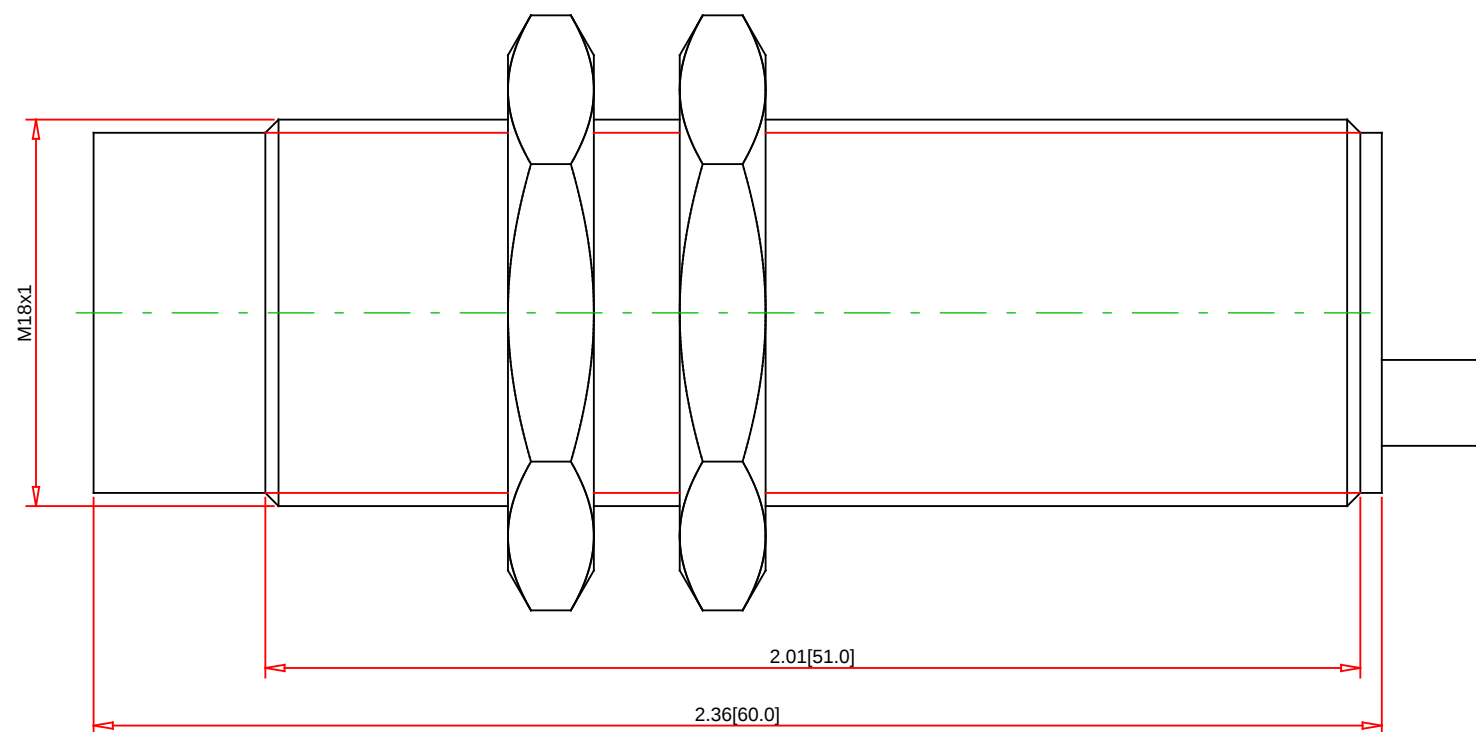

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Detecting Distance: 8.0 mm (0.31 in)
Circuit Type: AC/DC 2-wire
Output Mode: NO
Volts Type: AC/DC
Voltage Range: 24-240
Max Load: AC:5-300 mA DC:5-200 mA
Shielding: Shielded
Max Switching Frequency: 25 Hz AC / 3000 Hz DC
Temp Range: -25° to 70° C (-13° to 158° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP68
Standards: UL, CE Rohs

Specification:

Sensor Type: Inductive
Description: Proximity Sensor, Inductive, 18 mm Barrel, 24-240, Shielded
Body Style: Barrel
Diameter: mm
Housing Material: Nickel Plated Brass
Cable Size: 10.0 m (32.8 ft)
Connector Type:
Special Features: Extended Range