

# XS618B1PAL5

Inductive proximity sensors XS, inductive sensor XS6 M18, L62mm, brass, Sn8mm, 12...48 VDC, cable 5 m



## Main

|                                    |                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------|
| Range of Product                   | Telemecanique Inductive proximity sensors XS                                    |
| Series name                        | General purpose                                                                 |
| Sensor Type                        | Inductive proximity sensor                                                      |
| Device Application                 | Mobile equipment                                                                |
| Sensor name                        | XS6                                                                             |
| Sensor design                      | Cylindrical M18                                                                 |
| Size                               | 62 mm                                                                           |
| Body type                          | Fixed                                                                           |
| Detector flush mounting acceptance | Flush mountable                                                                 |
| Material                           | Metal                                                                           |
| Type of output signal              | Discrete                                                                        |
| Wiring Technique                   | 3-wire                                                                          |
| [Sn] nominal sensing distance      | 0.31 in (8 mm)                                                                  |
| Discrete output function           | 1 NO                                                                            |
| Output circuit type                | DC                                                                              |
| Discrete output type               | PNP                                                                             |
| Electrical connection              | Cable                                                                           |
| Cable length                       | 16.40 ft (5 m)                                                                  |
| [Us] rated supply voltage          | 12...48 V DC reverse polarity protection                                        |
| Switching capacity in mA           | <= 200 mA DC overload and short-circuit protection                              |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529<br>IP69K conforming to DIN 40050 |

## Complementary

|                          |                               |
|--------------------------|-------------------------------|
| Thread type              | M18 x 1                       |
| Detection face           | Frontal                       |
| Front material           | PPS                           |
| Enclosure Material       | Nickel Plated Brass           |
| Sensing range            | > 0.16...0.31 in (> 4...8 mm) |
| Operating zone           | 0.00...0.25 in (0...6.4 mm)   |
| Differential travel      | 1...15% of Sr                 |
| Cable composition        | 3 x 0.34 mm <sup>2</sup>      |
| Wire insulation material | PVC                           |
| Status LED               | Output state 1 LED yellow)    |
| Supply voltage limits    | 10...58 V DC                  |
| Switching frequency      | <= 1000 Hz                    |
| Maximum voltage drop     | <2 V closed)                  |
| Current consumption      | <= 10 mA no-load              |
| Maximum delay first up   | 10 ms                         |
| Maximum delay response   | 0.3 ms                        |
| Maximum delay recovery   | 0.7 ms                        |
| Marking                  | CE                            |

|                 |                       |
|-----------------|-----------------------|
| Threaded length | 2.05 in (52 mm)       |
| Length          | 2.44 in (62 mm)       |
| Net Weight      | 0.53 lb(US) (0.24 kg) |

## Environment

|                                       |                                         |
|---------------------------------------|-----------------------------------------|
| Product Certifications                | UL<br>CSA<br>E2                         |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C)              |
| Ambient Air Temperature for Storage   | -40...185 °F (-40...85 °C)              |
| Vibration resistance                  | 25 gn +/- 2 mm 10...55 Hz)IEC 60068-2-6 |
| Shock resistance                      | 50 gn 11 ms IEC 60068-2-27              |

## Ordering and shipping details

|                   |                          |
|-------------------|--------------------------|
| Category          | 22486-SENSORS, PROXIMITY |
| Discount Schedule | DS2                      |
| GTIN              | 3389110133240            |
| Returnability     | Yes                      |
| Country of origin | ID                       |

## Packing Units

|                              |                        |
|------------------------------|------------------------|
| Unit Type of Package 1       | PCE                    |
| Number of Units in Package 1 | 1                      |
| Package 1 Height             | 1.65 in (4.200 cm)     |
| Package 1 Width              | 5.20 in (13.200 cm)    |
| Package 1 Length             | 5.59 in (14.200 cm)    |
| Package 1 Weight             | 6.56 oz (186.000 g)    |
| Unit Type of Package 2       | S02                    |
| Number of Units in Package 2 | 12                     |
| Package 2 Height             | 5.91 in (15.000 cm)    |
| Package 2 Width              | 11.81 in (30.000 cm)   |
| Package 2 Length             | 15.75 in (40.000 cm)   |
| Package 2 Weight             | 6.07 lb(US) (2.752 kg) |


## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                                                                 |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                                                                                                                    |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                                                                                                               |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                                                                                                                     |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                                                                                                                                                                                                                                                                                                           |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

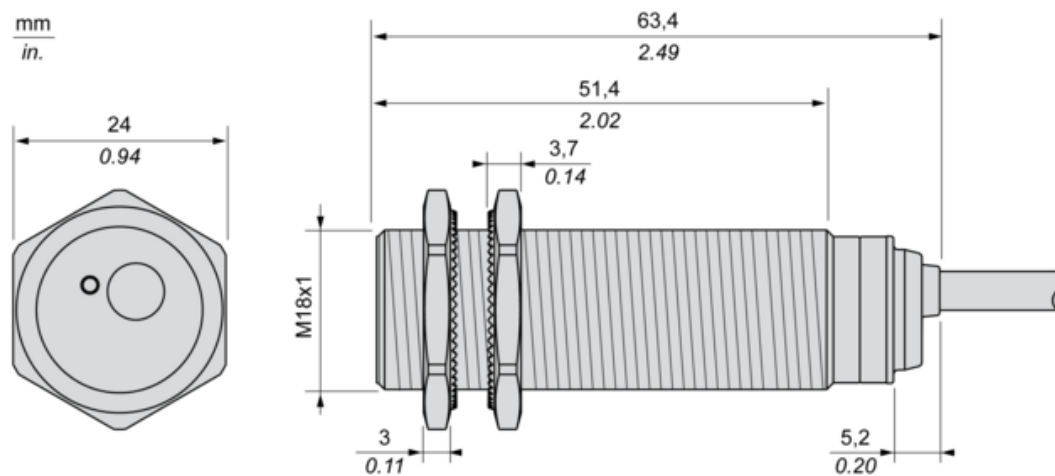


### Minimum Mounting Distances

Side by side

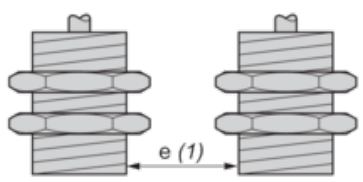


$e (1) \geq 16 \text{ mm}/0.63 \text{ in.}$

Face to face

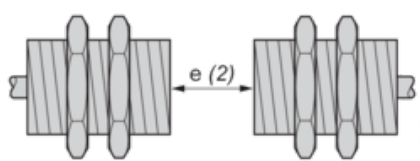


$e (2) \geq 100 \text{ mm}/3.94 \text{ in.}$

Facing a metal object

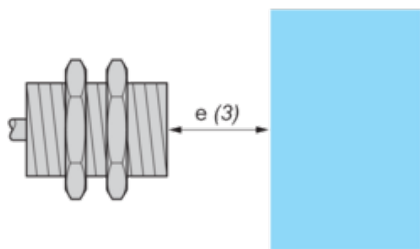

$e (3) \geq 25 \text{ mm}/0.98 \text{ in}$


### Mounting

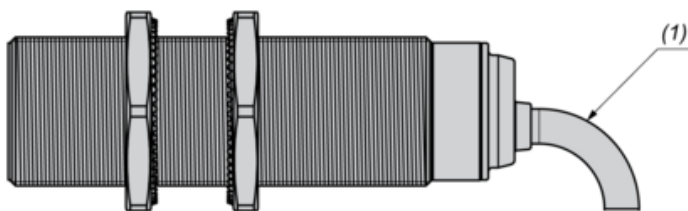

(1) Bending cable: 4 x external cable diameter

## Wiring Schemes

PNP

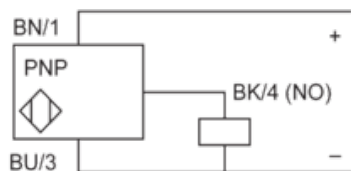

BU : Blue

BN : Brown

BK : Black