


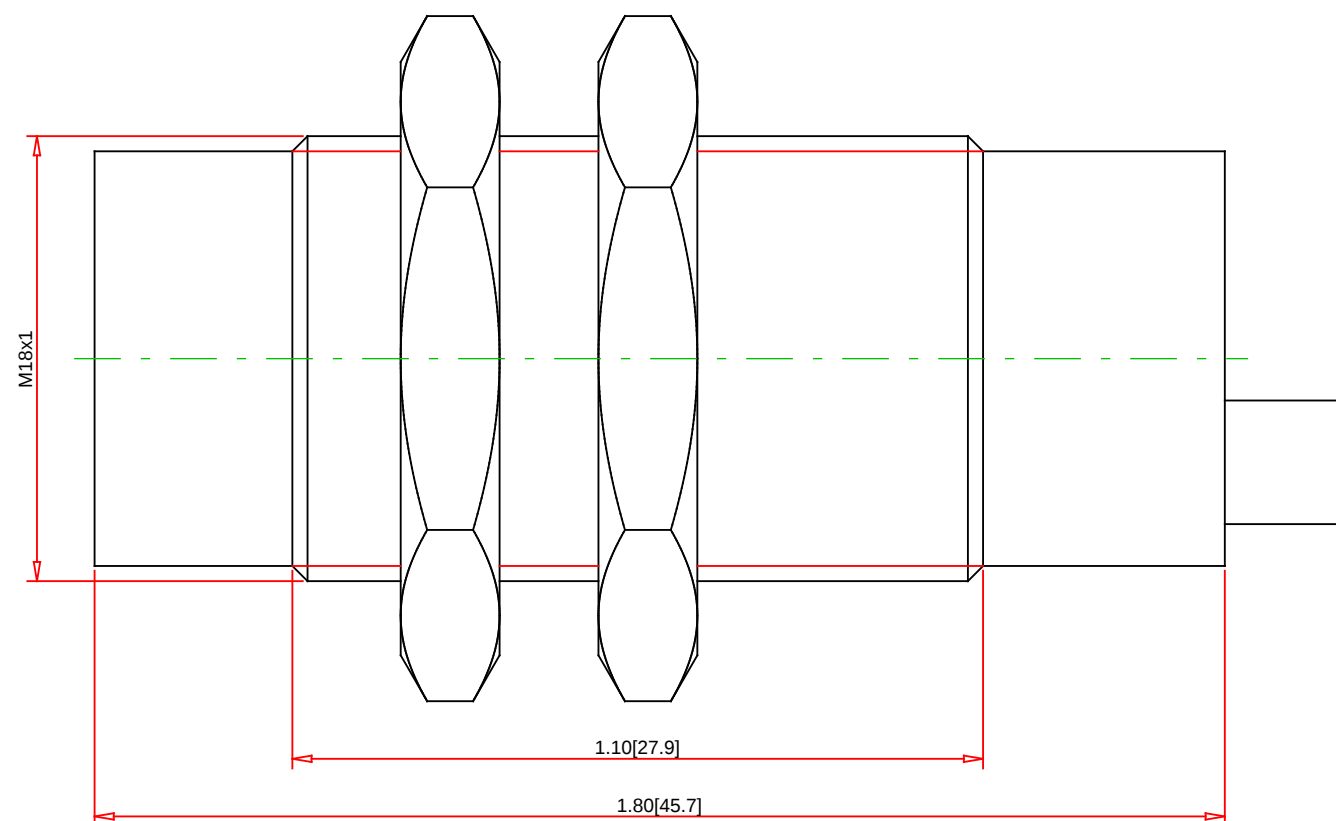

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: XUB4ANANL2	 Telemecanique Sensors Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com
Technical Information: Diffuse with Background Suppression: Diffuse: 100.0 mm (3.9 in) Polarized Retroreflective: Thru Beam: Retroreflective: Circuit Type: NPN Output Mode: Light Operate Power: DC Voltage Range: 12-24 VDC Max Load: 100 mA Max Switching Frequency : 500 Hz Temp Range: -25° to 55° C (-13° to 131° F) NEMA Type: 4X (indoor use only) IP Rating: 67 Standards: UL, CE Rohs		Specification: Sensor Type: Proximity Diffuse - Fixed Description: Photoelectric, Proximity Diffuse - Fixed, 18 mm Barrel, 12-24 VDC Body Style: Barrel Diameter: mm Housing Material: Plastic - PBT Face Material: PMMA Adjustment: No Cable Size: 5.0 m (16.4 ft) Connector Type: Special Features: