



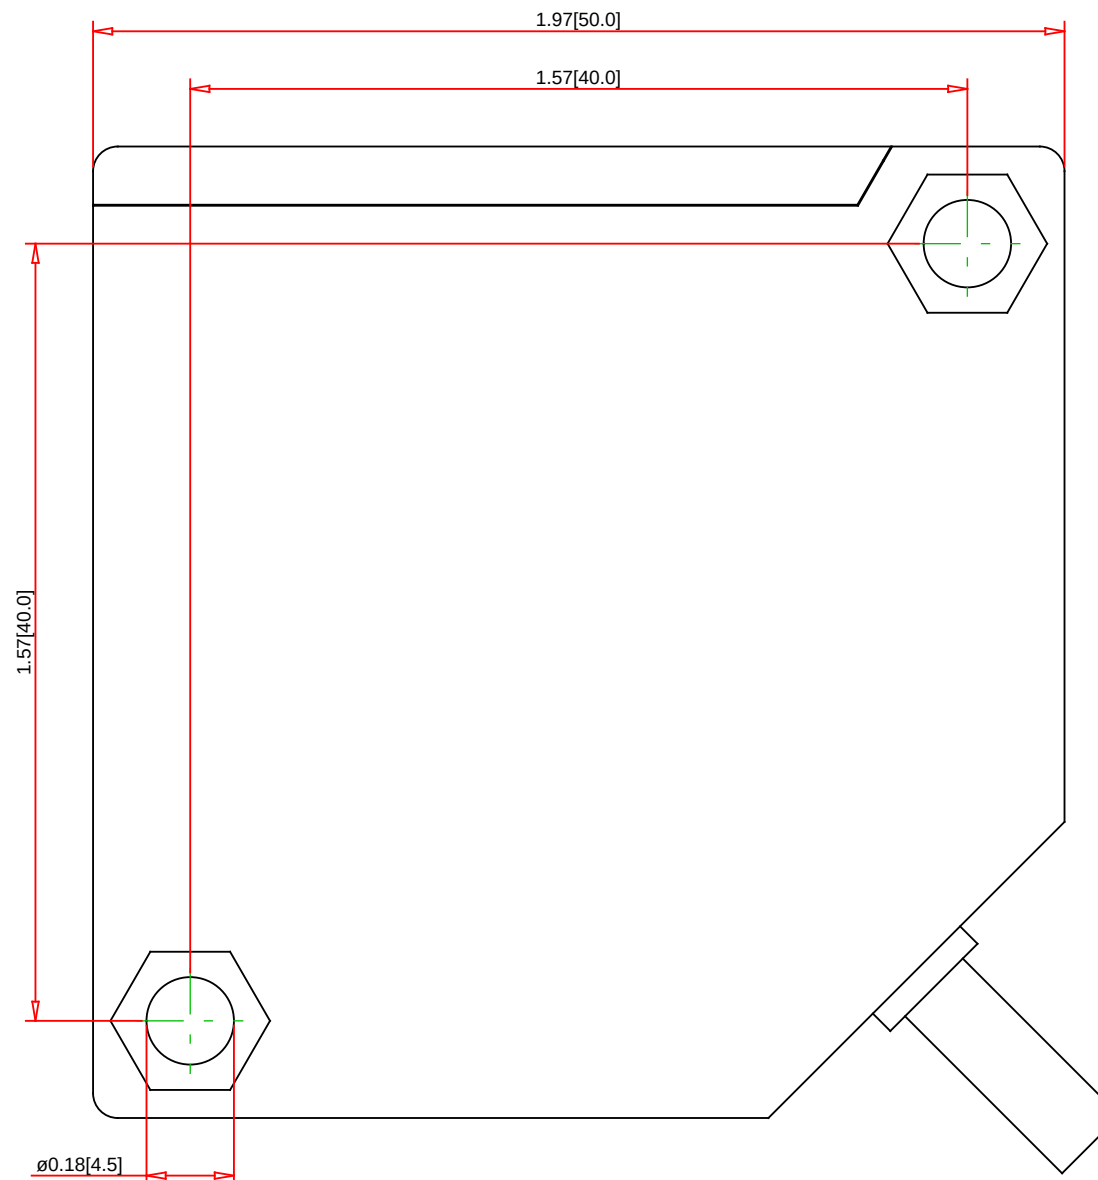

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XUK0ARCTL2

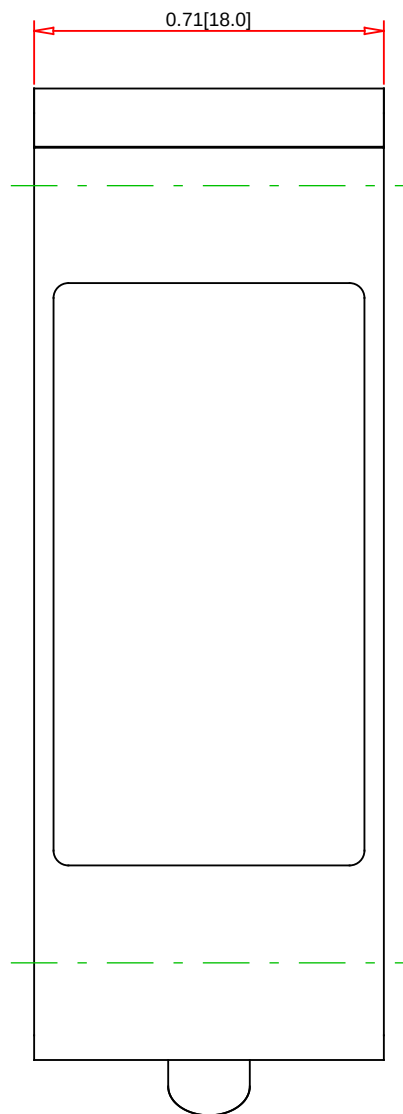

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse: 1000.0 mm (39.4 in)
Polarized Retroreflective: 4000.0 mm (157.5 in)
Thru Beam: 30000.0 mm (1181.1 in)
Retroreflective:
Circuit Type: AC/DC Relay
Output Mode: Light/Dark Operate
Power: AC/DC
Voltage Range: 20-240
Max Load: 3000 mA
Max Switching Frequency : 20 Hz
Temp Range: -25° to 55° C (-13° to 131° F)
NEMA Type: 4X (indoor use only)
IP Rating: 65
Standards: UL, CE Rohs

Specification:

Sensor Type: Multi-Mode
Description: Photoelectric, Multi-Mode, Small Rectangle, 20-240
Body Style: Small Rectangle
Diameter:
Housing Material: Plastic - PBT
Face Material: PMMA
Adjustment: Pushbutton teach
Cable Size: 2.0 m (6.6 ft)
Connector Type:
Special Features: Hinged cover