



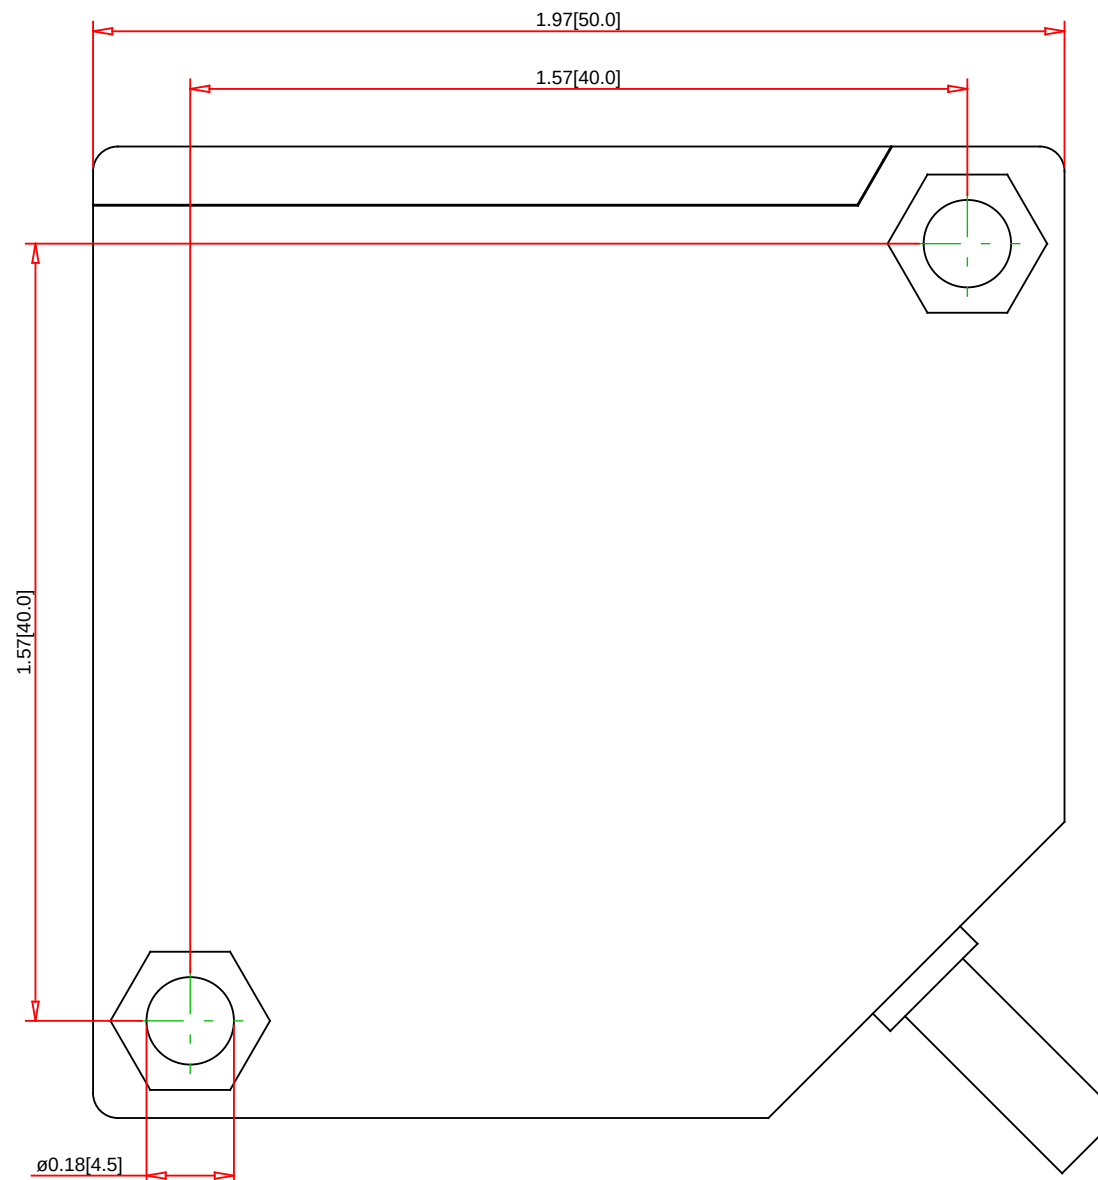

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XUK2ARCNL2T

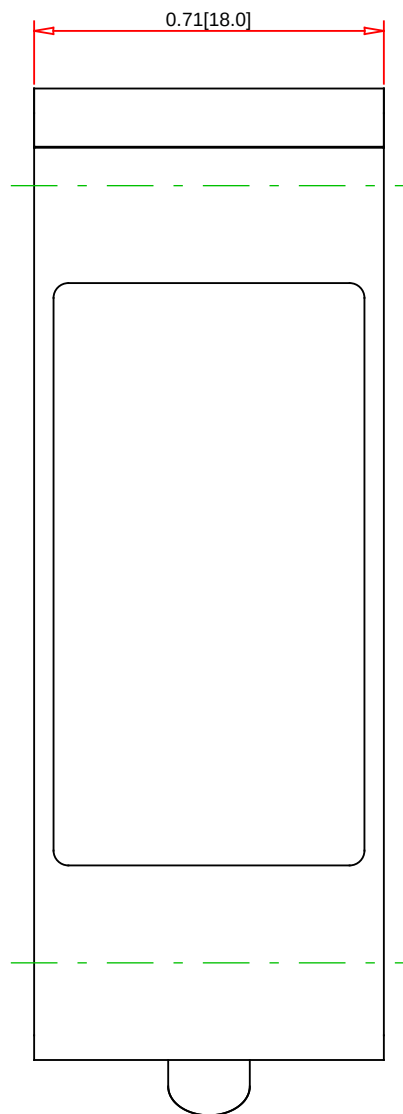

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse:
Polarized Retroreflective: 1000.0 mm (39.4 in)
Thru Beam: 30000.0 mm (1181.1 in)
Retroreflective:
Circuit Type:
Output Mode:
Power: AC/DC
Voltage Range: 20-240
Max Load:
Max Switching Frequency :
Temp Range: -25° to 55° C (-13° to 131° F)
NEMA Type: 4X (indoor use only)
IP Rating: 65
Standards: UL, CE Rohs

Specification:

Sensor Type: Thru-Beam Transmitter
Description: Photoelectric, Thru-Beam Transmitter, Small Rectangle, 20-240
Body Style: Small Rectangle
Diameter:
Housing Material: Plastic - PBT
Face Material: PMMA
Adjustment: No
Cable Size: 2.0 m (6.6 ft)
Connector Type:
Special Features: Hinged cover