




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XUM0ANSAL2

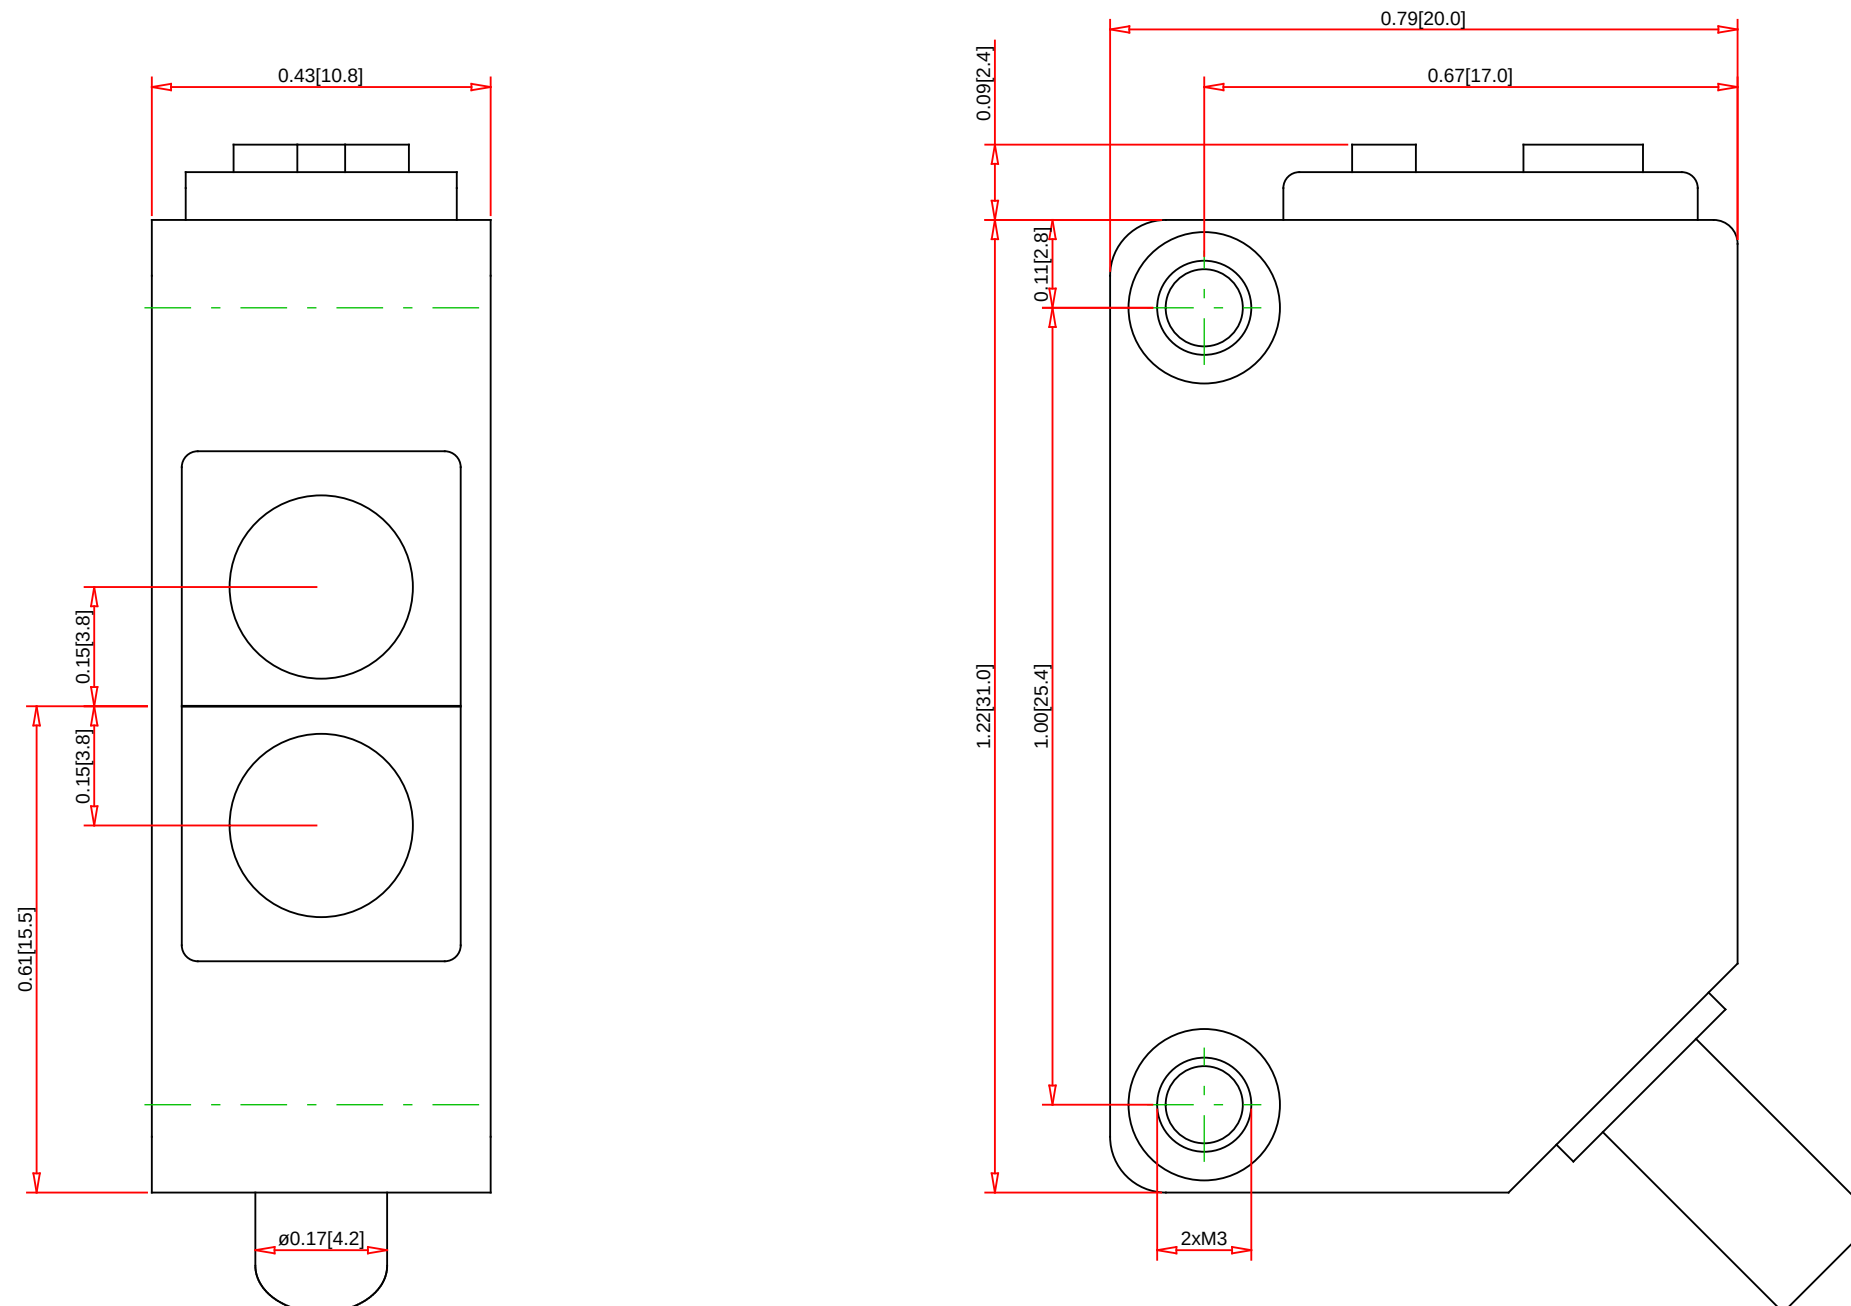

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse: 400.0 mm (15.7 in)
Polarized Retroreflective: 3000.0 mm (118.1 in)
Thru Beam: 14000.0 mm (551.2 in)
Retroreflective:
Circuit Type: NPN
Output Mode: Light/Dark Operate
Power: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Max Switching Frequency : 250 Hz
Temp Range: -25° to 55° C (-13° to 131° F)
NEMA Type: 4X (indoor use only)
IP Rating: 67
Standards: UL, CE Rohs

Specification:

Sensor Type: Multi-Mode
Description: Photoelectric, Multi-Mode, Min Rectangle, 12-24 VDC
Body Style: Min Rectangle
Diameter:
Housing Material: Plastic - PBT
Face Material: PMMA
Adjustment: Pushbutton teach
Cable Size: 2.0 m (6.6 ft)
Connector Type:
Special Features: