




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XUVR0303PANL2

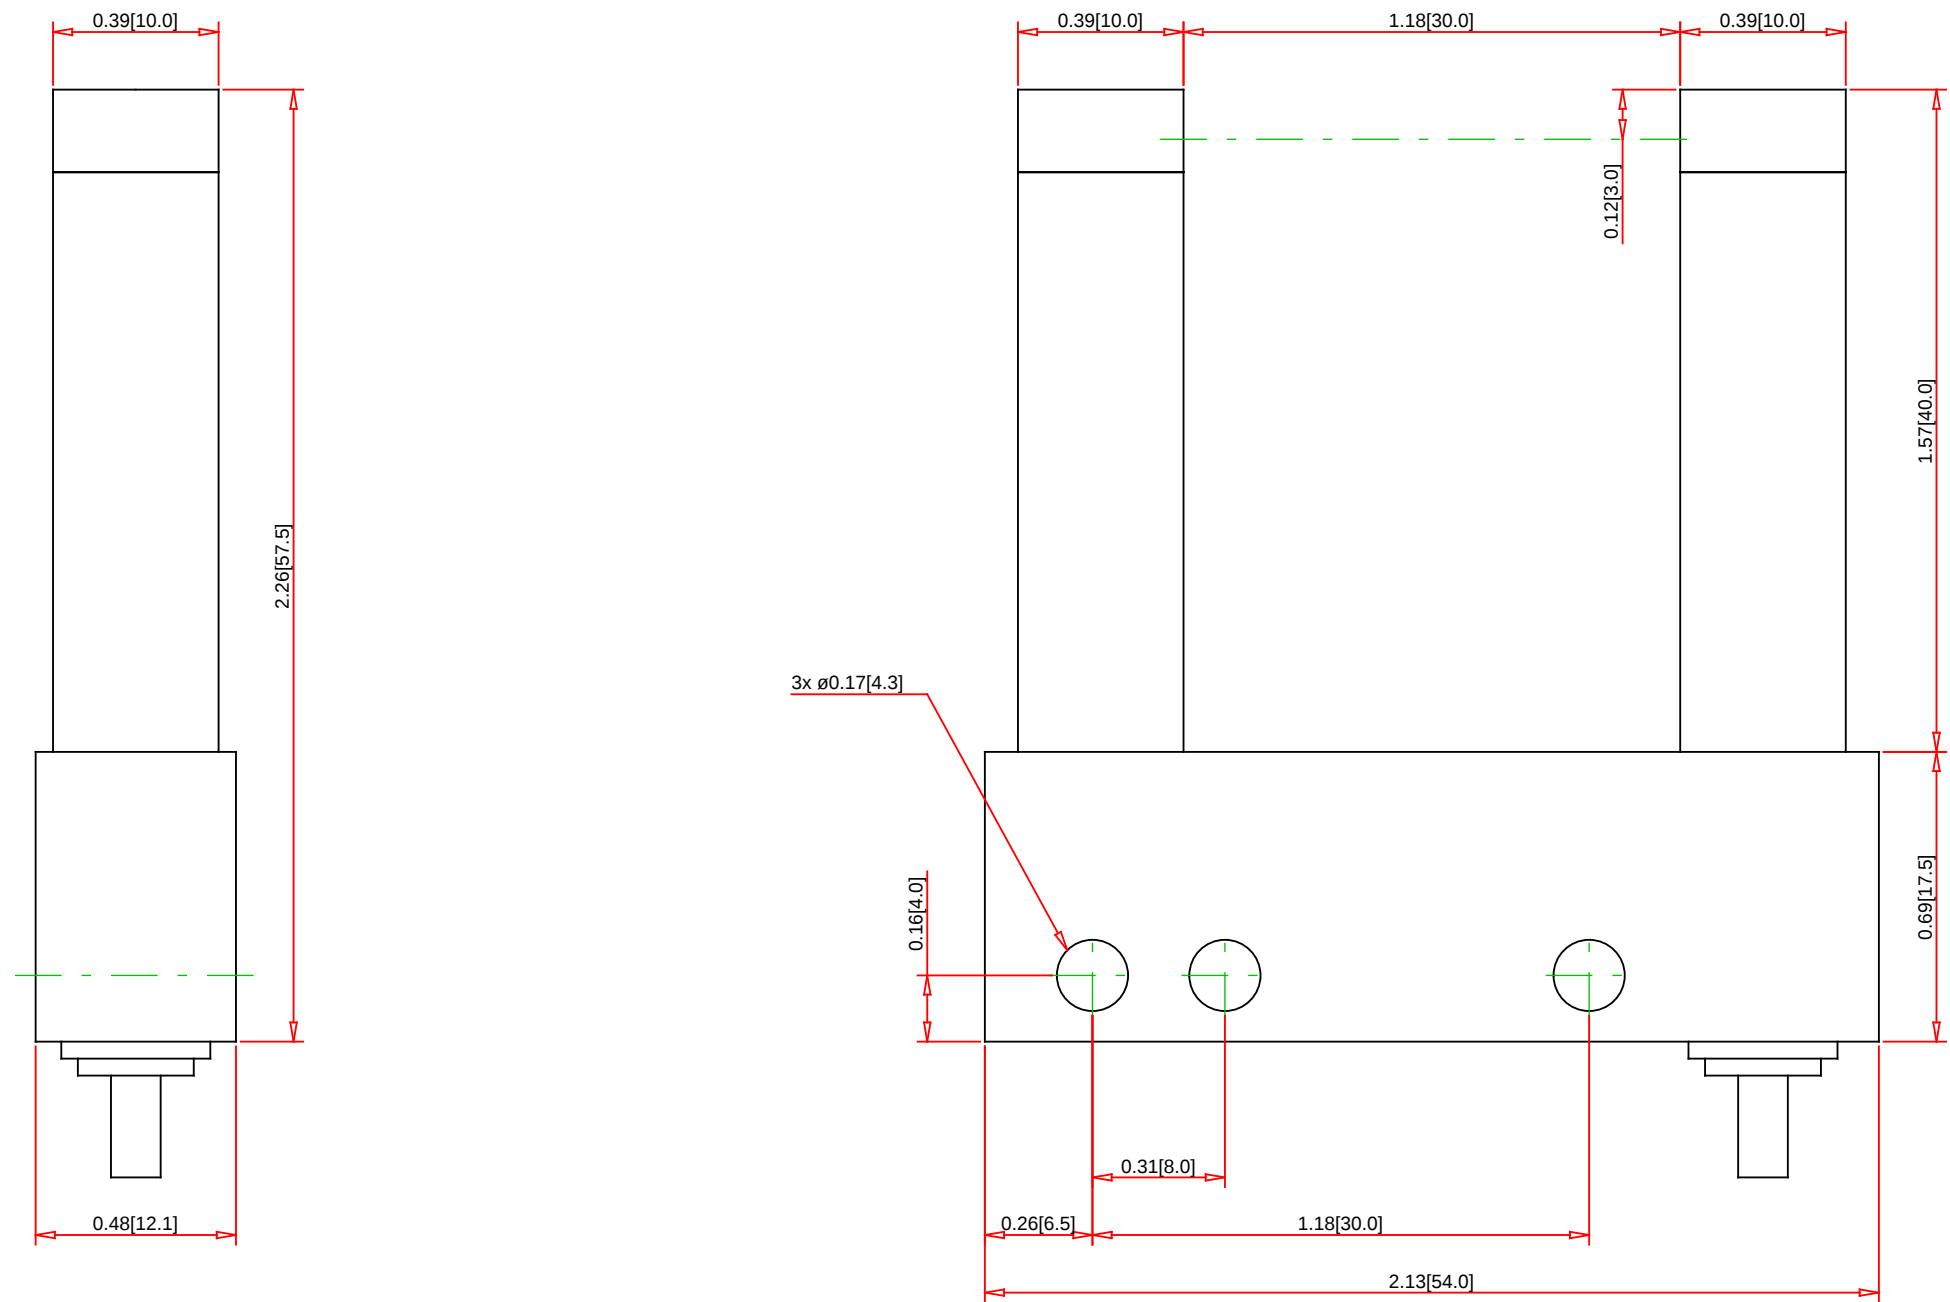

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse:
Polarized Retroreflective:
Thru Beam: 30.0 mm (1.18 in)
Retroreflective:
Circuit Type: PNP
Output Mode: Light Operate
Power: DC
Voltage Range: 12-24 VDC
Max Load: 20 mA
Max Switching Frequency : 4000 Hz
Temp Range: -10 to 60° C (+14 to 140° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP65, IP67
Standards: UL, CE Rohs

Specification:

Sensor Type: Fork - Small Object Detection, Part Counting, Flag Detection
Description: Photoelectric, Fork - Small Object Detection, Part Counting, Flag Detection, Fork, 12-24 VDC
Body Style: Fork
Diameter:
Housing Material: Metal - Aluminum
Face Material: Polyamide/glass
Adjustment: No
Cable Size: 2.0 mm (6.6 ft)
Connector Type:
Special Features: