


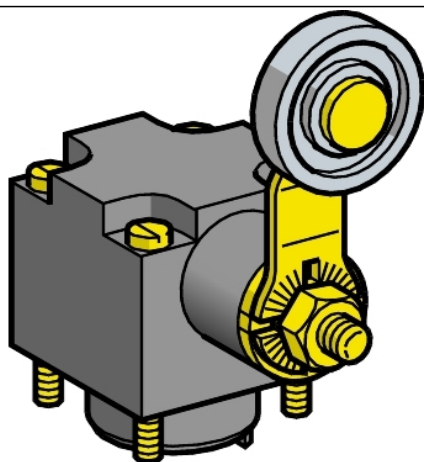

Main

Range of Product	Telemecanique Limit switches XC Standard
Series name	Standard format
Product or Component Type	Limit switch head
Device short name	ZCKD
Head type	Rotary head
Product Compatibility	XCKS
Associated body	ZCKS6 ZCKSD39H29 ZCKS9 ZCKS1H29 ZCKSD31 ZCKS5H29 ZCKS7H29 ZCKSD39 ZCKS1 ZCKSD35H29 ZCKS6H29 ZCKS8H29 ZCKSD37 ZCKSD35 ZCKS2H29 ZCKS9H29 ZCKS8 ZCKSD37H29 ZCKS7 ZCKSD31H29 ZCKS2 ZCKS5
Movement of operating head	Rotary
Type of operator	Roller lever spring return metal
Type of approach	Lateral approach, 2 directions

Complementary

Switch actuation	By 30° cam
Positive opening	With
Head material	Plastic

Environment

Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Environmental characteristic	Standard environment

Ordering and shipping details

Category	22416-LIMIT SWITCHES,IEC,XCKL
Discount Schedule	T
GTIN	3389110647075
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.22 in (3.1 cm)
Package 1 Width	2.44 in (6.2 cm)
Package 1 Length	2.95 in (7.5 cm)
Package 1 Weight	3.39 oz (96.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	40
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	8.92 lb(US) (4.046 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Contractual warranty

Warranty	18 months
----------	-----------