


Data Sheet | Item Number: 207-1332

Gelbox; Branch; for cables; with gel; 221, 2x73 Series; max. 4 mm² connectors; without splicing connectors; Size 2; gray

<https://www.wago.com/207-1332>

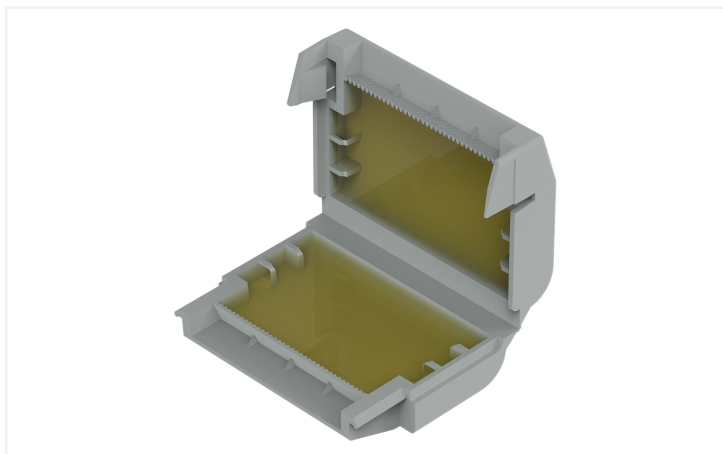

Color: ■ gray





Application Examples

- Bathroom installation (DIN VDE 0100-701)
- Washing facilities/irrigation systems
- Farms and garden centers (DIN VDE 0100-0705)
- Swimming pool areas (DIN VDE 0100-702)
- Parking lot lighting
- Charging stations and lighting systems in ports

Note on Packaging Unit (PU) and Subpackaging Unit (SPU):

If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.
If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.

Please refer to the system description for the splicing connectors that can be used.

Your Benefits:

- Easy, fast and safe to use
- Can be used immediately and accessed again later
- Silicon-free
- Label-free
- Suitable for indefinite storage
- The complete system, which consists of gelboxes and WAGO splicing connectors, has been VDE-tested and IPX8-certified.

Connection data		
Connection 1		
Actuation type	Locking system	
Physical data		
Width	45.9 mm / 1.807 inches	
Height	17.8 mm / 0.701 inches	
Depth	33.6 mm / 1.323 inches	
Mechanical data		
Design	Size 2	
Mounting type	Flying leads	
Protection type	IPX8	
Suitable	for 4 mm² splicing connectors	
Material data		
Note (material data)	Information on material specifications can be found here	
Color	gray	
Housing material	Polypropylene	
Fire load	0 MJ	
Weight	18.4 g	



Environmental requirements	
Ambient temperature (operation)	-55 ... +85 °C
Ambient temperature (storage)	0 ... +40 °C

Commercial data	
ETIM 9.0	EC001170
ETIM 8.0	EC001170
PU (SPU)	48 (4) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143998017
Customs tariff number	85389099990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
	Approval	Standard
	VDE	EN 60998
	VDE Prüf- und Zertifizierungsinstitut	400051938
		Certificate Name
		EU-Declaration of Conformity WAGO GmbH & Co. KG
		UK-Declaration of Conformity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 207-1332	↓


Documentation			
System Description		Additional Information	
System Description 207 Series Gel boxes	pdf 1156.45 KB	Certificate	pdf 2308.76 KB
System Description 207 Series Gel boxes	pdf 1191.37 KB	DLG Test Report 7438	pdf 1455.46 KB

Bid Text		
207-1332	xml 3.58 KB	↓
207-1331	docx 20.38 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 207-1332 ↓	ZUKEN Portal 207-1332 ↓

Installation Notes

Installation



Open the Gelbox at the side latches. Place the wired connector in the Gelbox. Place the wired connector in the Gelbox. Close the Gelbox.



Close latch securely.

Re-accessible:

- Open the Gelbox.
- Remove the gel.
- Rewire with new components.



Lift the flap and pull the cover perforation forward. Press in the perforation on the sides. Tear off the cover from the perforation. As a counter display: Bend the rear flap at the fold, straighten it and fix it in the card-board cut-out



If the flap is not required, tear off from the perforation.