

Data Sheet | Item Number: 216-241


Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

<https://www.wago.com/216-241>



Color: ■ white

Similar to illustration

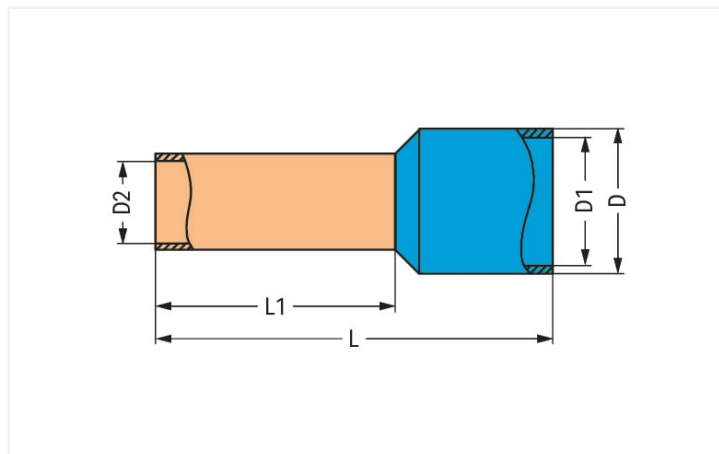

Dimensions in mm

Technical data

Main product function	Ferrule
Sleeve cross-section (AWG)	20 AWG
Sleeve for	0.5 mm ²

Connection data

Strip length	12 mm / 0.47 inches
--------------	---------------------

Physical data

Length	16 mm
Crimp length (length of sleeve)	10 mm
Diameter	3.1 mm
Inner Diameter plastic collar	2.6 mm
Diameter crimp sleeve inside	1 mm

Mechanical data

Suitable	2001 – 2002 Series
----------	--------------------

Material data

Color	white
Fire load	0.001 MJ
Weight	0.1 g



Commercial data		
Product Group	2 (Terminal Block Accessories)	
eCl@ss 10.0	27-40-02-01	
eCl@ss 9.0	27-40-02-01	
ETIM 8.0	EC000005	
ETIM 7.0	EC000005	
PU (SPU)	1000 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4044918016315	
Customs tariff number	85369010000	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-241

↓

Documentation				
Bid Text				
216-241	19.02.2019	xml	2.80 KB	↓
216-241	11.09.2017	doc	23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable