
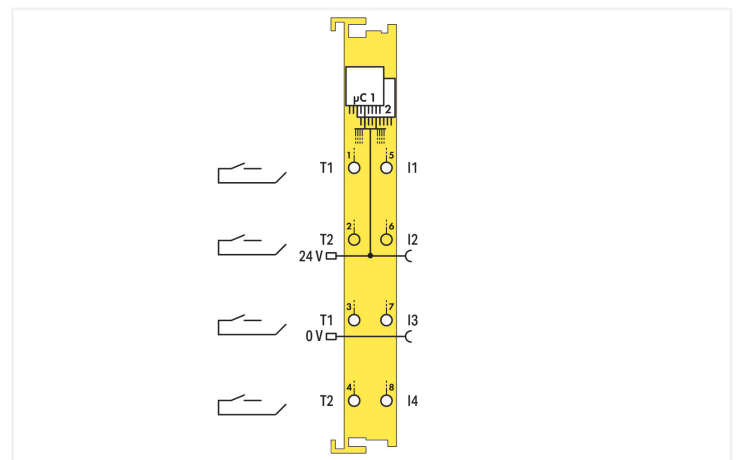
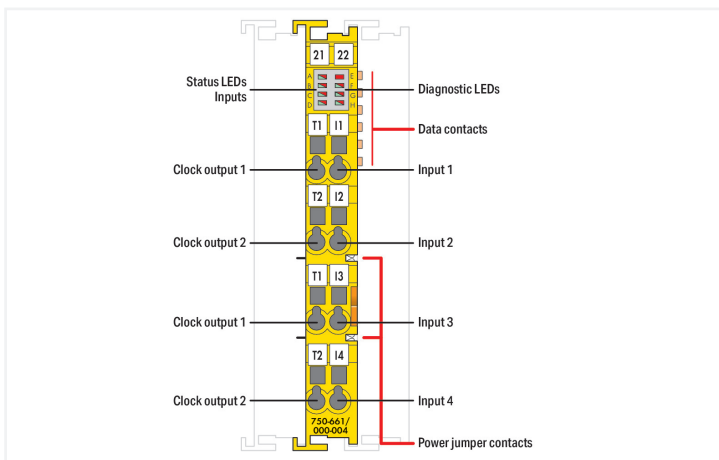


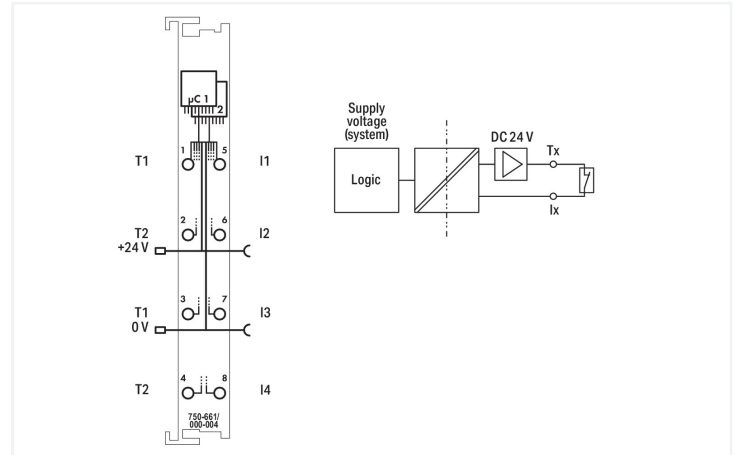

The PROFIsafe Module (75x-661/000-004) connects to potential-free emergency stop buttons with contacts, safety interlock switches, operating mode switches, safety sensors and semiconductor outputs.

The module features four clock-sensitive inputs (I1 ... I4) that are fed via two differently clocked outputs (T1 ... T2).

Clock outputs are short-circuit-protected. Inputs are continually monitored for cross circuits and power supply from separate sources. Additional safety-relevant parameters (e.g., operating modes, switching off test pulses, discrepancy or filter times) can be configured via *WAGO-I/O-CHECK*.

The configuration tool can be conveniently integrated into engineering systems supporting both CC2 and CC3 tool calling interfaces (TCI).

When exchanging modules, parameters are automatically downloaded into the control unit via PROFIsafe-compatible iPar server – depending on settings. The PROFIsafe address can be set using the DIP switch located on the side of the module, or via *WAGO-I/O-CHECK*.

The module supports PROFIsafe protocols V2.4 (PROFIBUS, PROFINET) and V2.6 (PROFINET).

Field and system levels are electrically isolated.

Individual safety modules can be arranged in any combination when configuring the fieldbus node.

To protect the 24 VDC power supply against surge and burst (to IEC 61000-6-7 and for marine applications), a WAGO filter module or a suitable external interference suppression filter must be used. Additional information can be found in the product manual (available in German and English).

The 75x-661/000-004 Module was evaluated by UL to UL/CSA 61010-1, UL/CSA 61010-2-201, UL 121201, and CSA-C22.2 No. 213.

The functional safety assessment to the specified standards was conducted by TÜV Rheinland.

Additional information and examples can be found in the WAGO Download Center (link: [Learning Material | WAGO Download Center](#)).

General technical data

Protocols	PROFIsafe V2.6 (PROFINET) and V2.4 (PROFIBUS, PROFINET)
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software Parameter restoration via iPar server functionality is supported according to PROFIsafe specification
Indicators	LED (A-D) green/red: Status/Error I1 ... I4; LED (E) red: Group error; LED (F-H) green/red: Diagnostics
Total number of channels (module)	4
Pluggable connector	fixed

Digital Inputs

Number of digital inputs	4
Signal type	Digital
Signal type (voltage)	24 VDC
Sensor connection	4 x (Fail-safe input with test pulse)
Input characteristic	clock sensitive
Input characteristic	Type 1 per IEC 61131
Input current per channel for signal (1) typ.	3 mA
Signal frequency (max.)	50 Hz

Digital Clock Outputs

Signal type	Digital
Signal type (voltage)	24 VDC
Output current per channel	0.1 A

Digital outputs

Signal type	Digital
Signal type (voltage)	24 VDC

Technical data

Supply voltage (system)	5 VDC; via data contacts
Current consumption (5 V system supply)	120 mA
Supply voltage (field)	24 VDC, SELV/PELV (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission (field side supply voltage only) via spring contact)
Current consumption, field supply (module with no external load)	25 mA
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
Current carrying capacity (power jumper contacts)	10 A

Functional Safety

Achievable safety classes	SIL 3; Category 4, PLe (two-channel); SIL 2; Category 2; PLd (one-channel)
Safety standards	IEC 61508-1 ... -7; EN ISO 13849-1; EN 62061
Interface types according to ZVEI (inputs)	Drain; A, C0, C1, C2, C3

Connection Data

Connection technology: I/O	8 x CAGE CLAMP®
Connectable conductor materials	Copper
Connection type	Inputs/outputs
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	12 mm / 0.472 inches
Height	100 mm / 3.937 inches
Depth	67.8 mm / 2.669 inches
Depth from upper-edge of DIN-rail	60.6 mm / 2.386 inches

Mechanical data

Mounting type	DIN-35 rail
Pluggable connector	fixed

Material data

Housing material	Polycarbonate; polyamide 6.6
Fire load	0.912 MJ
Weight	49.5 g
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	0 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	0 ... 2000 m / 0 ... 6562 ft
Mounting position	Horizontal left, horizontal right, horizontal top, vertical top and vertical bottom
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2, marine applications, EN 61000-6-7 (FS)
EMC emission of interference	per EN 61000-6-3, -4; marine applications
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43
Permissible H ₂ S contaminant concentration at a relative humidity 75 %	10 ppm
Permissible SO ₂ contaminant concentration at a relative humidity 75 %	25 ppm

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966333992
Customs tariff number	85389099990



Product Classification	
UNSPSC	32151705
ETIM 9.0	EC001599
ETIM 10.0	EC001599
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	1303-86-2 1317-36-8 693-98-1 7439-92-1 80-05-7
REACH Candidate List Substance	2-methylimidazole 4,4'-isopropylidenediphenol Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	696e7936-9f14-4c67-8d1f-d71190ddcdd8
SCIP notification number (Belgium)	779b2e61-ab91-48aa-a2e7-ee76fb5330dd
SCIP notification number (Bulgaria)	8d28f555-b9e4-4276-a743-beabc05cabaf
SCIP notification number (Czech Republic)	409f7edd-e53c-4b38-bd33-9e2d600328c6
SCIP notification number (Denmark)	6e5186b9-b4f1-4f48-9321-0dd996e4d76a
SCIP notification number (Finland)	92757068-c2d3-40aa-8e44-973371d9eda9
SCIP notification number (France)	0bb32618-0c1e-4c4b-9ae9-cb92c4b337ec
SCIP notification number (Germany)	2cd21b6f-8581-46ab-94bf-909086fe9b46
SCIP notification number (Hungary)	ce39b376-4d4f-4eec-a96a-7f436d0fbee1
SCIP notification number (Italy)	c2be3605-d0d7-4557-8bcc-ce90d8b4db33
SCIP notification number (Netherlands)	fb8365d5-d3bc-4025-9fd7-2c32f9650622
SCIP notification number (Poland)	4072b74c-bed1-4684-8d2a-95de0a86dfb5
SCIP notification number (Romania)	0f409751-56d9-4996-85b7-6db66617353d
SCIP notification number (Sweden)	6f6daca2-3be2-4855-a6a8-4561079ebdfd

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	-	E175199
Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-



Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV GL SE	DNV-CG-0339,Aug.2021	TAA0000194
PRS Polski Rejestr Statków	-	TE/1101/880590/23

Approvals for hazardous areas



Approval	Standard	Certificate Name
ATEX TUEV Nord Cert GmbH	-	TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)
CCCEX CQST/CNEx	-	2020312310000213 (Ex ec IIC T4 Gc)
IECEX TUEV Nord Cert GmbH	-	IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)
INMETRO TÜV Rheinland do Brasil Ltda.	-	TÜV 12.1297 X
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Approvals for functional safety



Approval	Standard	Certificate Name
Prod. Safety, Funct. Safety TUEV Rheinland Industrie Service GmbH	-	No. 968/EZ 247.24/25
Profi-Safe Siemens AG/ComDeC	-	Z20292

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 750-661/000-004



Documentation

Manual
Product Manual 4FDI 24V PROFIsafe
V 1.1.0 13.02.2023
pdf 4729.73 KB



System Description
750/753 Series I/O-System – General Product Information
pdf 953.35 KB
Overview on WAGO-I/O-SYSTEM 750 approvals
pdf 770.48 KB
Functional Safety – General Product Information
pdf 217.82 KB





Bid Text		
750-661/000-004	docx 34.14 KB	↓
750-661/000-004	xml 9.36 KB	↓

Instruction Leaflet			
Operating and assembly instructions	V 1.3.0 12.04.2023	pdf 792.49 KB	↓

Application Notes

Application note SIEMENS			
Using iPar-Server option with WAGO PROFI-safe modules (a114802)	V 14.1 07.02.2023	zip 130043.55 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 750-661/000-004	↓

CAE data	
EPLAN Data Portal 750-661/000-004	↓

Engineering-Software

Configuration and Commissioning Software			
F-Address Confirmation Tool	1.2.2 06.06.2023	zip 3757.47 KB	↓
Safety Editor (SEDI) / 750-66x	3.5.1.0 25.01.2024	zip 19060.65 KB	↓

Runtime Software

Firmware			
0750-0661/0000-0004, Sicherer Digitaleingang	V 02 20.01.2023	zip 1019.43 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 DIN-rail

1.1.1.1 Mounting accessories



[Item No.: 210-196](#)
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-198](#)
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



[Item No.: 210-197](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



[Item No.: 210-114](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-118](#)
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



[Item No.: 210-115](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



[Item No.: 210-112](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



[Item No.: 210-113](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



1.1.2 Marking

1.1.2.1 Group marker carrier



[Item No.: 750-107](#)
Group marker carrier

1.1.2.2 Marker



[Item No.: 2009-145/000-006](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



[Item No.: 2009-145/000-007](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



[Item No.: 2009-145/000-023](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



[Item No.: 2009-145/000-012](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



[Item No.: 2009-145/000-005](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



[Item No.: 2009-145/000-024](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



[Item No.: 2009-145](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



[Item No.: 2009-145/000-002](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



[Item No.: 248-501/000-006](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



[Item No.: 248-501/000-007](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray



[Item No.: 248-501/000-023](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green



[Item No.: 248-501/000-017](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



[Item No.: 248-501/000-012](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



[Item No.: 248-501/000-005](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red



[Item No.: 248-501/000-024](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet



[Item No.: 248-501](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 248-501/000-002](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

1.1.2.3 Marker carrier



[Item No.: 750-103](#)
Group marker carrier

1.1.3 Shield termination

1.1.3.1 Shield clamping saddles



[Item No.: 790-108](#)
Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm



[Item No.: 790-208](#)
Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm



[Item No.: 790-116](#)
Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm



[Item No.: 790-216](#)
Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm



[Item No.: 790-124](#)
Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm



[Item No.: 790-220](#)
Shield clamping saddle; 30 mm wide; 6 ... 20 mm



[Item No.: 790-140](#)
Shield clamping saddle; diameter of compatible conductor



1.1.4 Supply module

1.1.4.1 Supply module



Item No.: 750-612
Power Supply; 0 ... 230 V AC/DC



Item No.: 750-602
Power Supply; 24 VDC



Item No.: 750-601
Power Supply; 24 VDC; fuse holder



Item No.: 750-610
Power Supply; 24 VDC; fuse holder; Diagnostics

1.1.5 System enclosure

1.1.5.1 System enclosure



Item No.: 850-825
IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20



Item No.: 850-826
IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-827
IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-828
IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip



Item No.: 850-826/002-000
IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-827/002-000
IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-828/002-000
IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip



Item No.: 850-834
IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20



Item No.: 850-835
IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-836
IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-814/002-000
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate



Item No.: 850-815/002-000
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate



Item No.: 850-816/002-000
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate



Item No.: 850-817/002-000
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate