

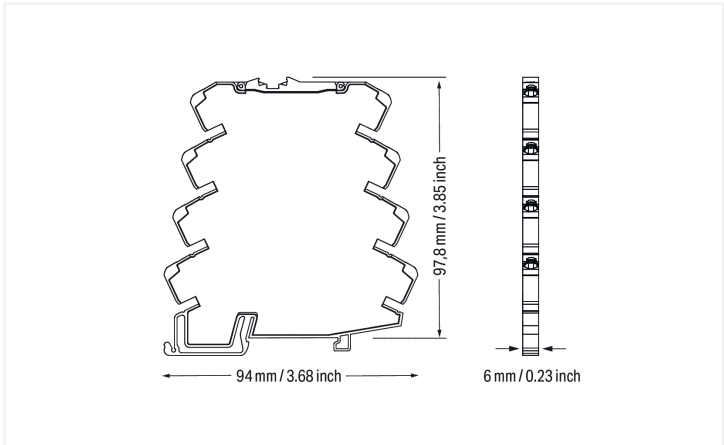
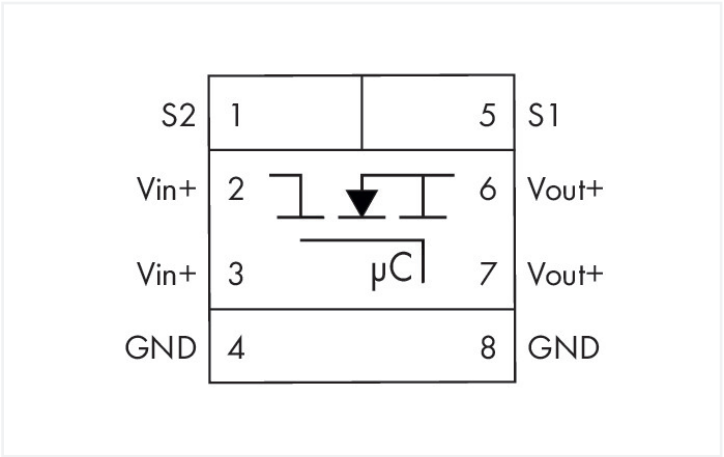
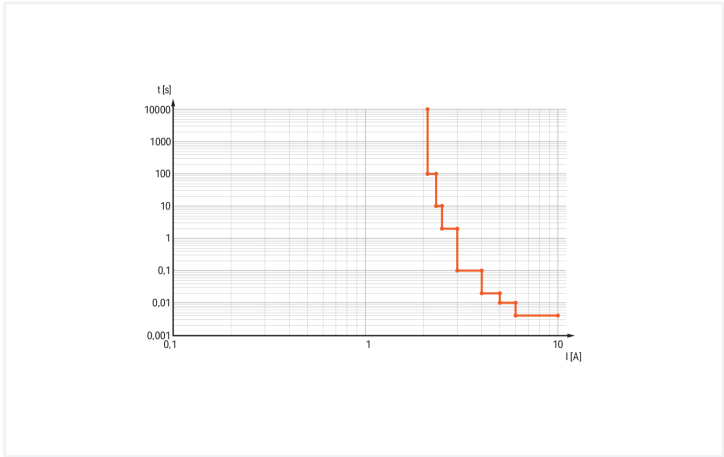


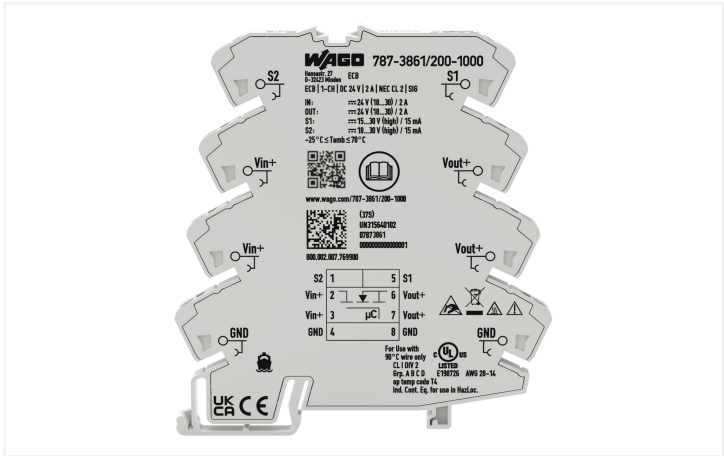

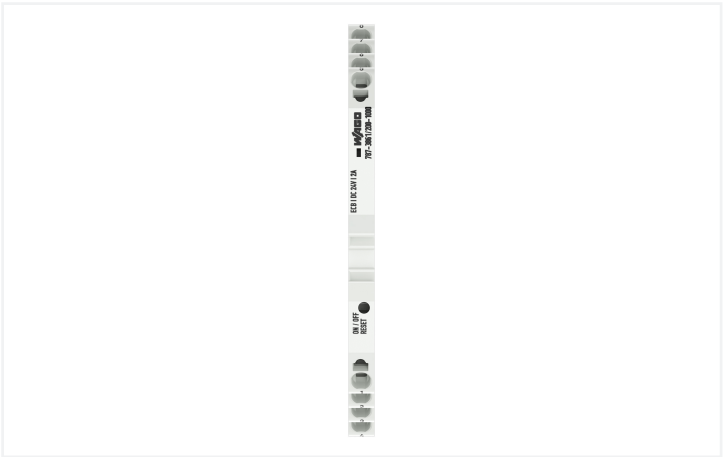

Features:

- Space-saving ECB with one channel
- Reliably and safely trips in the event of an overload and short circuit on the secondary side
- Switch-on capacity < 6,000 µF
- Enables the use of an economical, standard power supply
- Minimizes wiring via two voltage outputs and maximizes commoning options on both input and output sides (e.g., commoning of the output voltage on 857 and 2857 Series devices)
- Status signal – adjustable as single or group message
- Reset, switch on/off via remote input or local switch
- Prevents power supply overload due to total inrush current thanks to time-delayed switching on during interconnected operation

Notes	
Note	The device is designed for use in SELV circuits. Depending on the output current, please use the approved minimum conductor cross-sections.

Technical data			
Input		Output	
Nominal input voltage $U_{i\,nom}$	24 VDC	Total number of channels (module)	1
Input voltage range	18 ... 30 VDC	Nominal output voltage $U_{o\,nom}$	1 x 24 VDC
		Output voltage range	18 ... 30 VDC (U_e - voltage drop)
		Voltage drop	≤ 160 mV
		Nominal output current $I_{o\,nom}$	1 x 2 A (fixed setting)
		Default Setting	switched off
		Trip time	4 ms ... 100 s (load-dependent)
		Switch-on capacity	
		Switch-on behavior	Time-delayed channel switching (load-dependent, min. 0 ms / max. 500 ms)
		Switch-on threshold	DC 20.3 V

Signaling and Communication	
Signaling	1 x Status LED (green/yellow/red) 1 x Signal output (18 ... 30 VDC, max. 0.015 A), default setting: tripped
Operation status indicator	Green LED (channel OK) Red LED (channel switched off)
Remote input	1 x Control input (15 ... 30 VDC (active high); 0 ... 5 VDC (active low); max. 0.015 A)

Efficiency/Power Losses	
Power loss P_l	≤ 0.4 W (no load)
Efficiency (typ.)	98 %

Circuit Protection	
Internal fuse	T 4 A

Safety and protection			
Isolation voltage (connectors – housing)	1.5 kVDC	Insulation coordination (UL)	
Protection class	III	Overvoltage category	II
Protection type	IP20; per EN 60529	Pollution degree	2
Reverse voltage protection	No		
Transient suppression (primary)	Suppressor diode (33 V)		
Parallel operation of single channels	Not permitted		
Series operation	No		
MTBF	1,168,394 h		



Insulation coordination	
Overvoltage category	II
Pollution degree	2

Connection Data		
Number of jumper slots	8	
		Connection 1
		Connection technology
		Push-in CAGE CLAMP®
		WAGO connector
		WAGO 857 Series
		Solid conductor
		0.08 ... 2.5 mm² / 26 ... 14 AWG
		Fine-stranded conductor
		0.34 ... 2.5 mm² / 22 ... 14 AWG
		Strip length
		9 ... 10 mm / 0.35 ... 0.39 inches
		Note (conductor cross-section)
		Depending on the output current, use the conductor cross-sections tested and approved by UL: 26 ... 14 AWG (0.5 A); 22 ... 14 AWG (2 A)

Physical data		
Width		6 mm / 0.236 inches
Height		94 mm / 3.701 inches
Depth from upper-edge of DIN-rail		97.8 mm / 3.85 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Fire load		0.568 MJ
Weight		55.6 g

Environmental requirements		
Ambient temperature (operation)		-25 ... +70 °C
Ambient temperature (storage)		-40 ... +85 °C
Relative humidity		10 ... 95 % (no condensation permissible)
Derating		No derating
Operating altitude		≤ 2000 m (a.s.l.)

Standards and Specifications	
Conformity marking	CE; UKCA
Standards/specifications	EN 61000-6-2 EN 61000-6-3 UL 61010-2-201 DNV UL 1310 (NEC Class 2) UL 2367



Commercial data		
PU (SPU)		1 pcs
Packaging type		Bag
Country of origin		IN
Customs tariff number		85362010900

Product Classification		
UNSPSC		39121630
ETIM 9.0		EC001440
ETIM 10.0		EC001440
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
CAS-No.		11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance		Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status		Compliant,With Exemption
RoHS Exemption		6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)		a7576538-523f-47cc-8cb6-edfbb7939a8a
SCIP notification number (Belgium)		672b6731-a4c7-4c1d-a26d-d61d6aafb17
SCIP notification number (Bulgaria)		c8ef5fe7-4e83-4e42-82e4-ed76563028ec
SCIP notification number (Czech Republic)		7ec79cf2-56b1-412d-8e72-72acc3a935ee
SCIP notification number (Denmark)		0ef12c3d-92a8-4a1d-9988-1aeb0863d071
SCIP notification number (Finland)		83b9b7b3-c453-4af3-a056-cf44e0d8d7ee
SCIP notification number (France)		40030fd8-bc9e-4c18-bc58-492406cb7d8d
SCIP notification number (Germany)		c993fa6d-d849-4005-84dd-d1686caa0a95
SCIP notification number (Hungary)		9a98e824-9f24-47ae-bd05-97e797578080
SCIP notification number (Italy)		10badade-33a3-433a-a3b1-03aceee74243
SCIP notification number (Netherlands)		d17f1d28-f3b1-4956-a330-cd7c824b8e8d
SCIP notification number (Poland)		84cbcd6d-0b4a-457a-8613-93c4b98350d5
SCIP notification number (Romania)		4e44edf5-b7f5-466e-a720-24ff0418ae54
SCIP notification number (Sweden)		69afda5d-6d2b-4a1b-bee0-4794eb9af4e9

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
  					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	UL E175199 Vol.3 Sec.5	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UR Underwriters Laboratories Inc.	-	E175199			



Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00001D1

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-3861/200-1000



Documentation

Manual			
Product Manual Elec- tronic circuit breaker	V 1.0.0 25.03.2024	pdf 6935.35 KB	



Instruction Leaflet			
Electronic Circuit Brea- ker	V 1.1.1 11.09.2023	pdf 2491.12 KB	



CAD/CAE-Data

CAD data
2D/3D Models 787-3861/200-1000



1 Compatible Products

1.1 Optional Accessories

1.1.1 Jumper

1.1.1.1 Jumper



Item No.: 859-410/000-006 Jumper; for jumper slot; 10-way; insula- ted; blue
--



Item No.: 859-410 Jumper; for jumper slot; 10-way; insula- ted; light gray
--



Item No.: 859-410/000-005 Jumper; for jumper slot; 10-way; insula- ted; red



Item No.: 859-410/000-029 Jumper; for jumper slot; 10-way; insula- ted; yellow
--



Item No.: 859-402/000-006 Jumper; for jumper slot; 2-way; insulated; blue

Item No.: 859-402 Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 859-402/000-029 Jumper; for jumper slot; 2-way; insulated; yellow



Item No.: 859-403/000-006 Jumper; for jumper slot; 3-way; insulated; blue



Item No.: 859-403 Jumper; for jumper slot; 3-way; insulated; light gray

Item No.: 859-403/000-005 Jumper; for jumper slot; 3-way; insulated; red
--



Item No.: 859-403/000-029 Jumper; for jumper slot; 3-way; insulated; yellow



Item No.: 859-404/000-006 Jumper; for jumper slot; 4-way; insulated; blue



Item No.: 859-404 Jumper; for jumper slot; 4-way; insulated; light gray

Item No.: 859-404/000-005 Jumper; for jumper slot; 4-way; insulated; red
--

Item No.: 859-404/000-029 Jumper; for jumper slot; 4-way; insulated; yellow

Item No.: 859-405/000-006 Jumper; for jumper slot; 5-way; insulated; blue



1.1.1.1 Jumper

 Item No.: 859-405 Jumper; for jumper slot; 5-way; insulated; light gray	 Item No.: 859-405/000-005 Jumper; for jumper slot; 5-way; insulated; red	 Item No.: 859-405/000-029 Jumper; for jumper slot; 5-way; insulated; yellow	 Item No.: 859-406/000-006 Jumper; for jumper slot; 6-way; insulated; blue
 Item No.: 859-406 Jumper; for jumper slot; 6-way; insulated; light gray	 Item No.: 859-406/000-005 Jumper; for jumper slot; 6-way; insulated; red	 Item No.: 859-406/000-029 Jumper; for jumper slot; 6-way; insulated; yellow	 Item No.: 859-407/000-006 Jumper; for jumper slot; 7-way; insulated; blue
 Item No.: 859-407 Jumper; for jumper slot; 7-way; insulated; light gray	 Item No.: 859-407/000-005 Jumper; for jumper slot; 7-way; insulated; red	 Item No.: 859-407/000-029 Jumper; for jumper slot; 7-way; insulated; yellow	 Item No.: 859-408/000-006 Jumper; for jumper slot; 8-way; insulated; blue
 Item No.: 859-408 Jumper; for jumper slot; 8-way; insulated; light gray	 Item No.: 859-408/000-005 Jumper; for jumper slot; 8-way; insulated; red	 Item No.: 859-408/000-029 Jumper; for jumper slot; 8-way; insulated; yellow	 Item No.: 859-409/000-006 Jumper; for jumper slot; 9-way; insulated; blue
 Item No.: 859-409 Jumper; for jumper slot; 9-way; insulated; light gray	 Item No.: 859-409/000-005 Jumper; for jumper slot; 9-way; insulated; red	 Item No.: 859-409/000-029 Jumper; for jumper slot; 9-way; insulated; yellow	

1.1.2 Marking

1.1.2.1 Marker

 Item No.: 793-5501 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white	 Item No.: 793-502 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white	 Item No.: 793-566 WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white	 Item No.: 793-503 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white
 Item No.: 793-504 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	 Item No.: 793-505 WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white	 Item No.: 793-506 WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white	 Item No.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white
 Item No.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white			

1.1.2.2 Marking strip

 Item No.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.3 Potential distribution

1.1.3.1 Potential Distribution Module



Item No.: 787-3861/000-1000
Potential distribution module; 1 potential;
with 8 clamping points 0V; Conductor
cross-section up to 2.5 mm²



Item No.: 787-3861/000-2000
Potential distribution module; 1 potential;
with 8 clamping points 24V; Conductor
cross-section up to 2.5 mm²



Item No.: 787-3861/000-3000
Potential distribution module; 2 potentials;
with 4 clamping points each (0V / 24V);
Conductor cross-section up to 2.5 mm²

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a
partially insulated shaft; multicoloured