


Data Sheet | Item Number: 852-1411

Industrial-ECO-Switch; 5-port 1000Base-T; Extended temperature range; 4 * Power over Ethernet

<https://www.wago.com/852-1411>

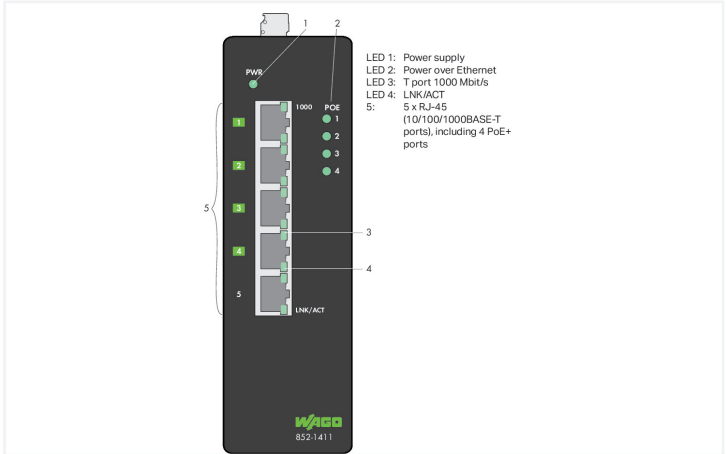

This unmanaged industrial ETHERNET switch (852-1411) has five Gigabit ETHERNET ports, four of which support Power over Ethernet (PoE+) at 30 W. The four PoE+ ports (IEEE 802.3at) can be used simultaneously to power PoE end devices (powered devices). The integrated voltage transformer enables operation with 24 VDC, which is the standard supply voltage in control cabinets. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Features:

- 5 ETHERNET ports 10/100/1000 Mbit/s Autonegotiation
- 4 PoE+ ports (IEEE 802.3at)
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports up to 8000 absolute MAC addresses
- Overvoltage protection
- Data flow control, per IEEE 802.3x Flow Control, in full-duplex mode
- Prioritization of ETHERNET data packets (PROFINET protocol, EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

Technical data	
Number of 1 Gb/s ports	5
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at High Power over Ethernet (PoE+) IEEE 802.1p Prioritization
MAC table (size)	8000 addresses
Jumbo frame size	10000 bytes
Supply voltage	24 ... 57 VDC
Power consumption (max.)	13 W
Power consumption (note)	133 W with 4 PoE
Current consumption (max.)	6000 mA
Transmission rate	Copper cable: 10/1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
Topology	Star



Technical data	
Power over Ethernet (PoE) features	Available power for powered devices (PD): 25.5 W Power (max.) from the power sourcing equipment (PSE): 30 W Voltage (PSE): 24 ... 57 VDC Voltage (PD): 50 ... 57 VDC Current (max.): 600 mA Resistance (max.): 12.5 Ω (Category 5) PoE power budget: 120 W PoE-supported operating mode: Mode A
Indicators	Device: LED (PWR) green: Power supply; LED (PoE 1 ... 4) green: Power over Ethernet; per port: LED (1000, LNK/ACT) green: Status 1000 Mbit/s, LNK/ACT ports 1 ... 5

Connection Data	
Connection technology: communication/fieldbus	Copper cable: 5 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-432/001-000; included female connector (MCS Connectors): 2231-102/026-000

Physical data	
Width	50 mm / 1.969 inches
Height	160 mm / 6.299 inches
Depth	120 mm / 4.724 inches

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Housing material	Sheet steel
Fire load	0.079 MJ
Weight	520 g
Conformity marking	CE

Environmental requirements	
Ambient temperature (operation)	-40 ... +70 °C (per CE; -10 ... +60 °C per UL 61010)
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Vibration resistance	Per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4055143727167
Customs tariff number	85176200000

Product Classification	
UNSPSC	43222612
eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 9.0	EC000734
ETIM 10.0	EC000734
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199
		EU-Declaration of Conformity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 852-1411	

Documentation			
Manual		System Description	
Product Manual Industrial ECO Switch; 5Port Gb; EXT; 4PoE	V 1.2.0 17.12.2019	pdf 1206.26 KB	
		Industrial Switches – General Product Information	pdf 1873.93 KB 
Bid Text		Instruction Leaflet	
852-1411	19.02.2019	xml 6.05 KB	
852-1411	23.07.2018	doc 29.50 KB	
ausschreiben.de 852-1411			
		Gebrauchs- und Montageanleitung 852-1411	V 1.0.0 pdf 721.30 KB 

CAD/CAE-Data	
CAD data 2D/3D Models 852-1411 ↓	CAE data ZUKEN Portal 852-1411 ↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Cables and connectors
1.1.1.1 Connector plug

 Item No.: 750-979/000-011 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	 Item No.: 750-979/000-021 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief	 Item No.: 750-979/000-012 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	 Item No.: 750-979/000-022 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief
 Item No.: 750-977/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22	 Item No.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief	 Item No.: 750-977/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24	 Item No.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief
 Item No.: 750-977/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22	 Item No.: 750-978/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	 Item No.: 750-977/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24	 Item No.: 750-978/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief
 Item No.: 750-979/000-013 Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief	 Item No.: 750-977/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22	 Item No.: 750-978/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief	 Item No.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module
1.1.2.1 Interface module
 Item No.: 289-195 Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

1.1.3 Power supply			
1.1.3.1 Power Supply			
			
Item No.: 787-1635 Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact	Item No.: 787-1633 Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact	Item No.: 787-1226 Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 6 A output current; DC-OK LED	Item No.: 787-1722 Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED