


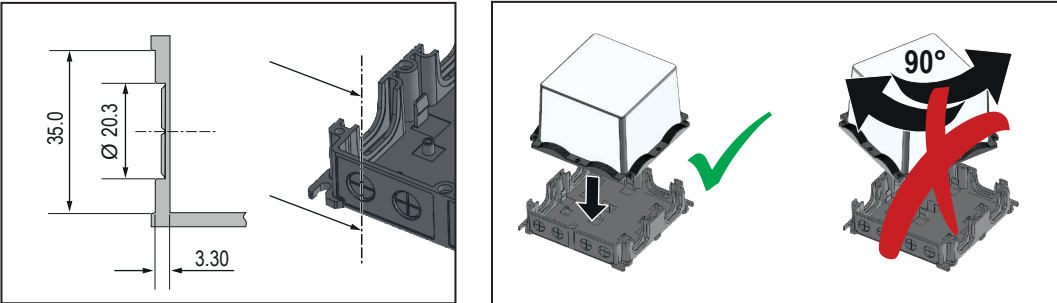
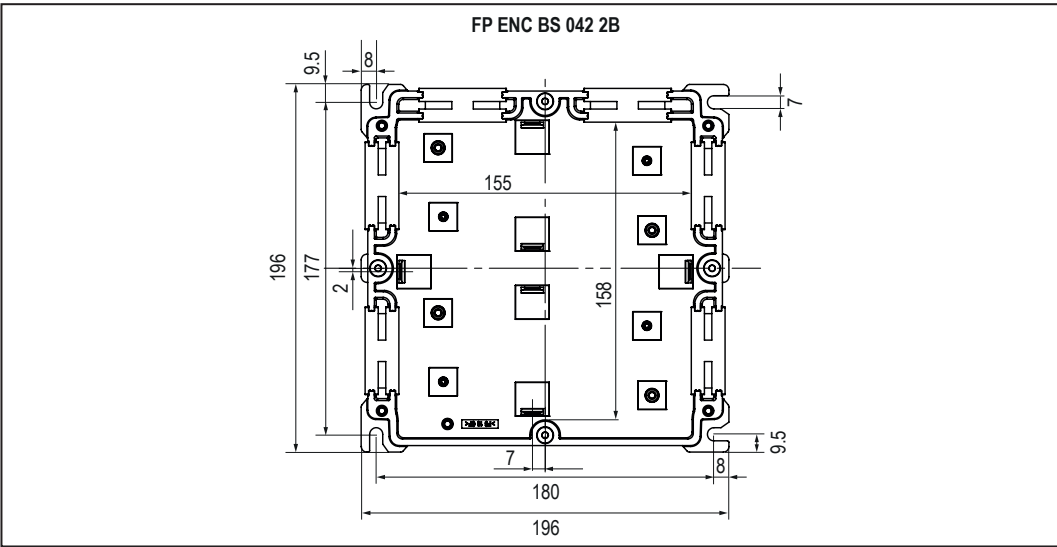
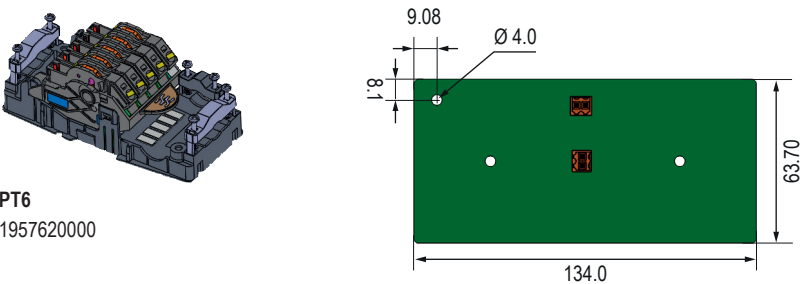
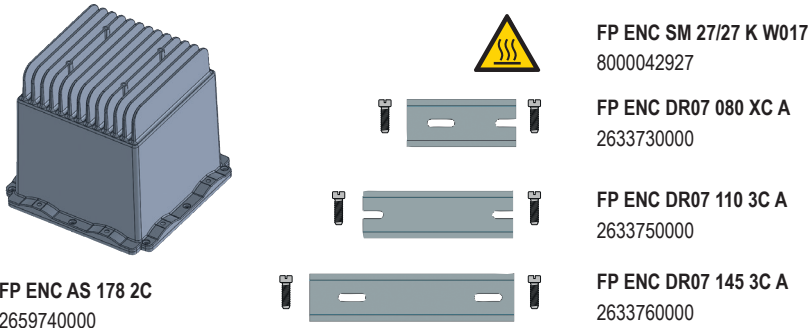
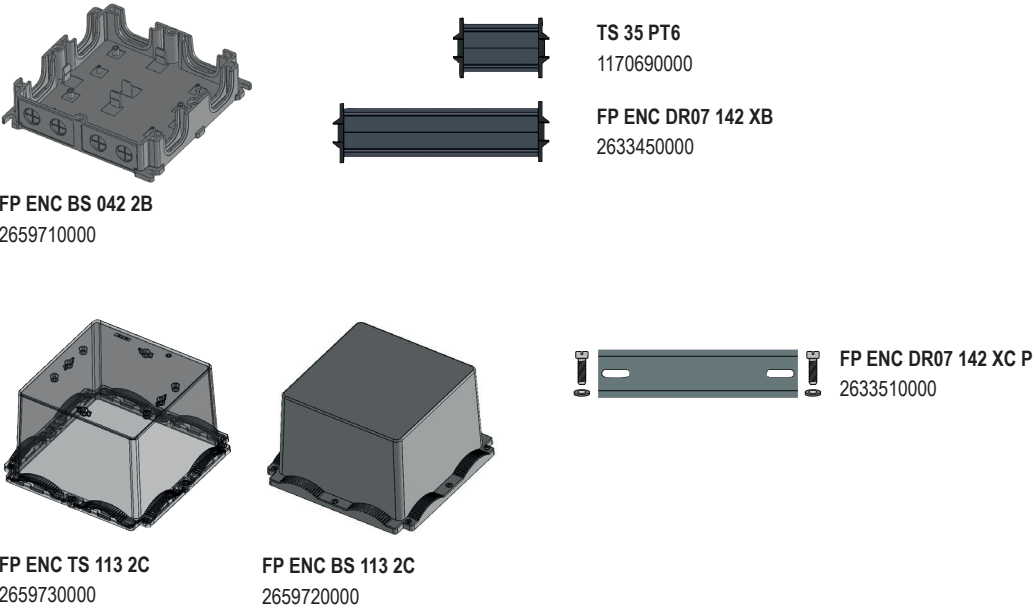
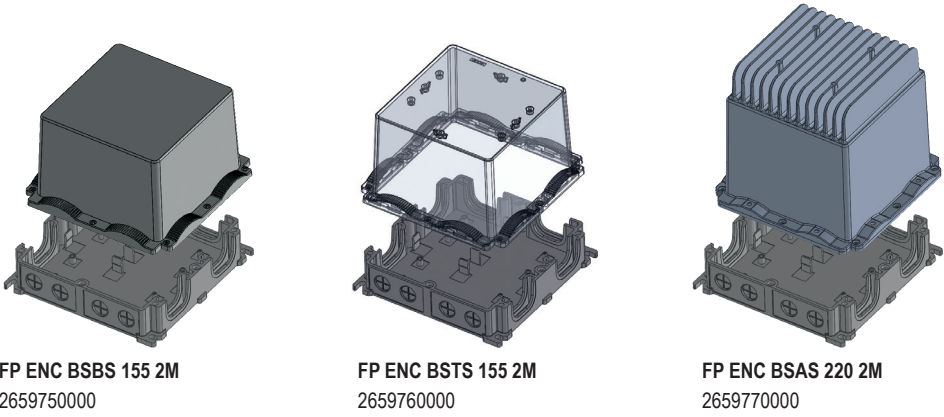
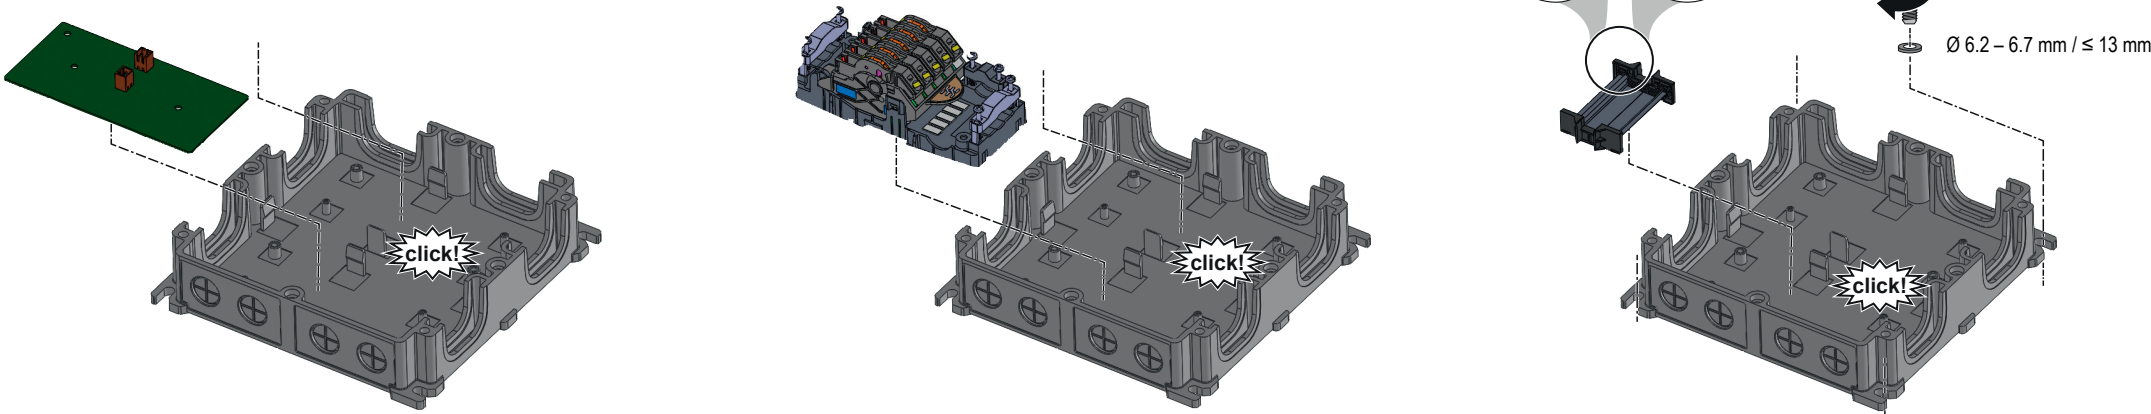
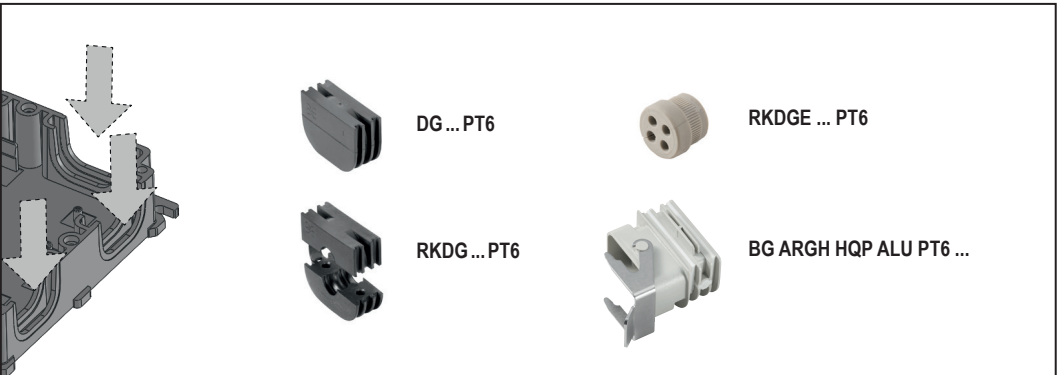
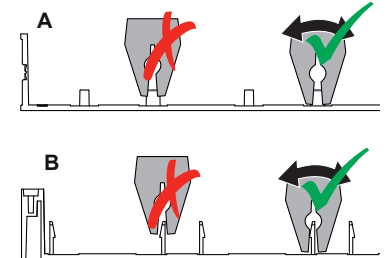
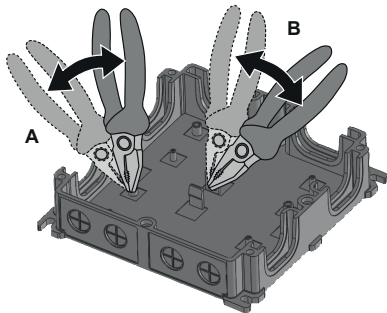
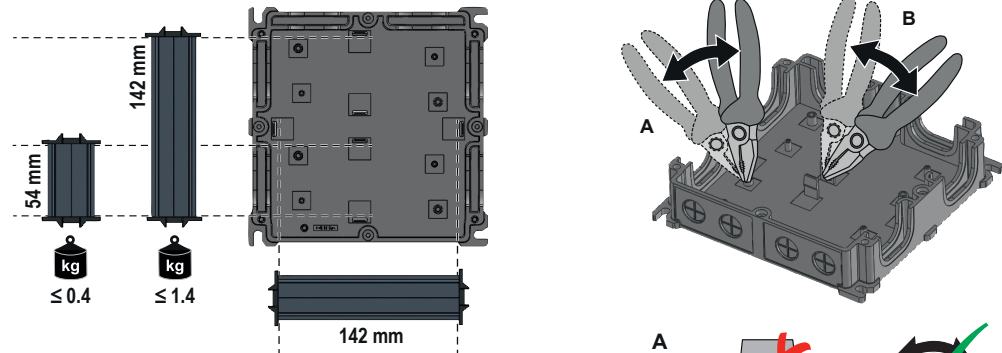
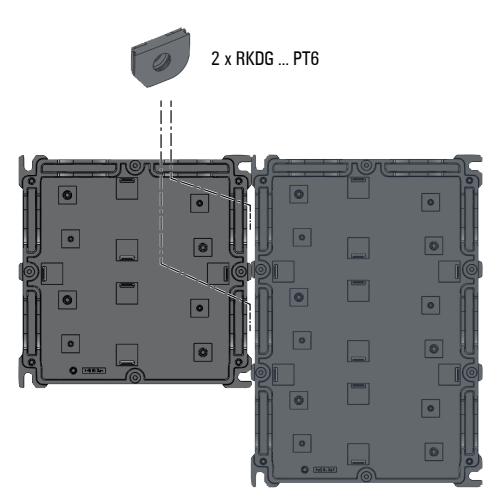
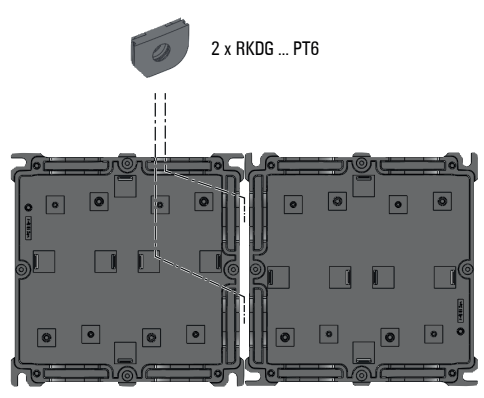
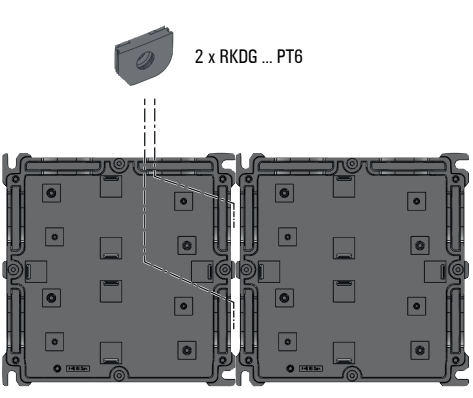
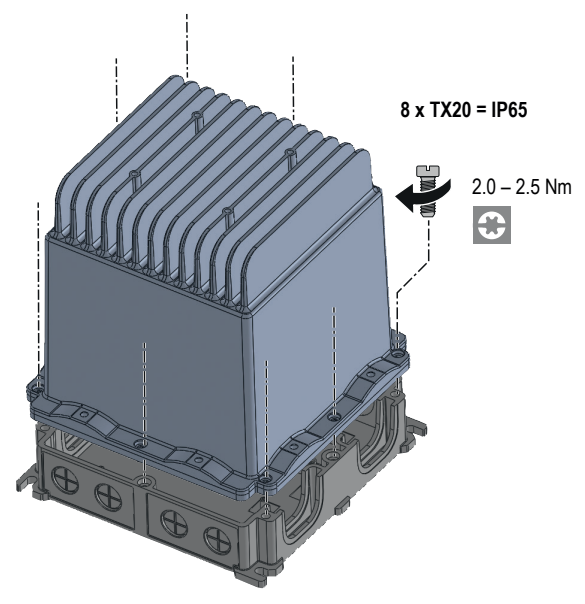
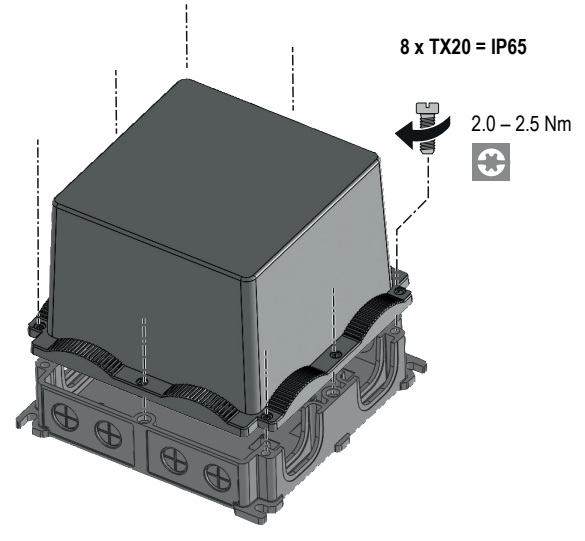
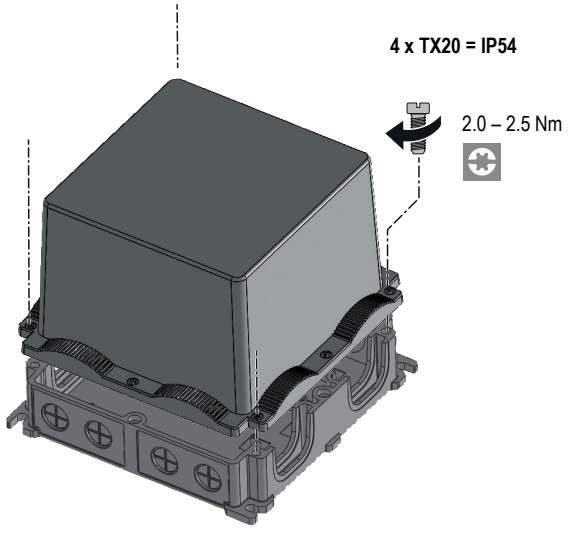
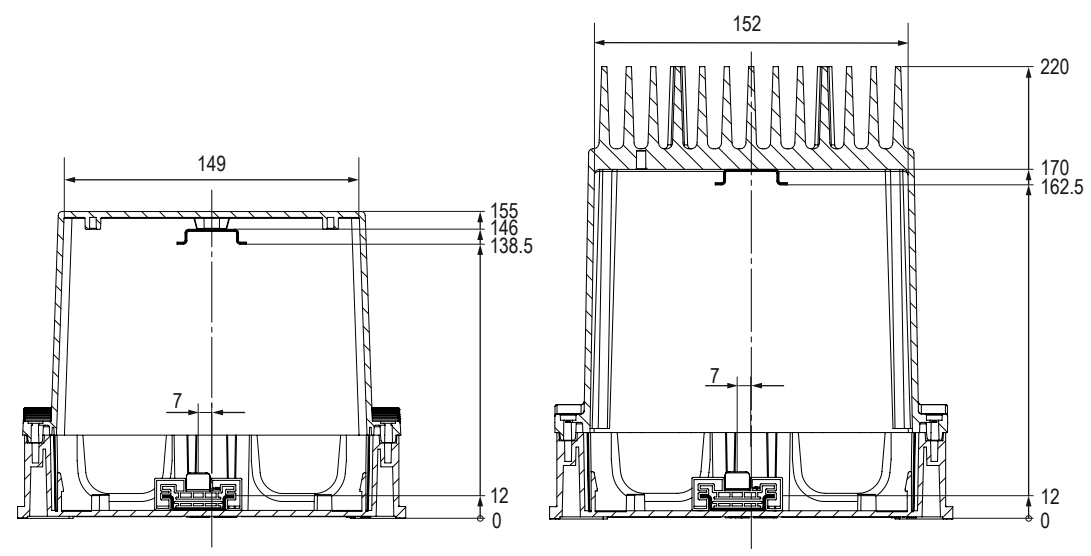


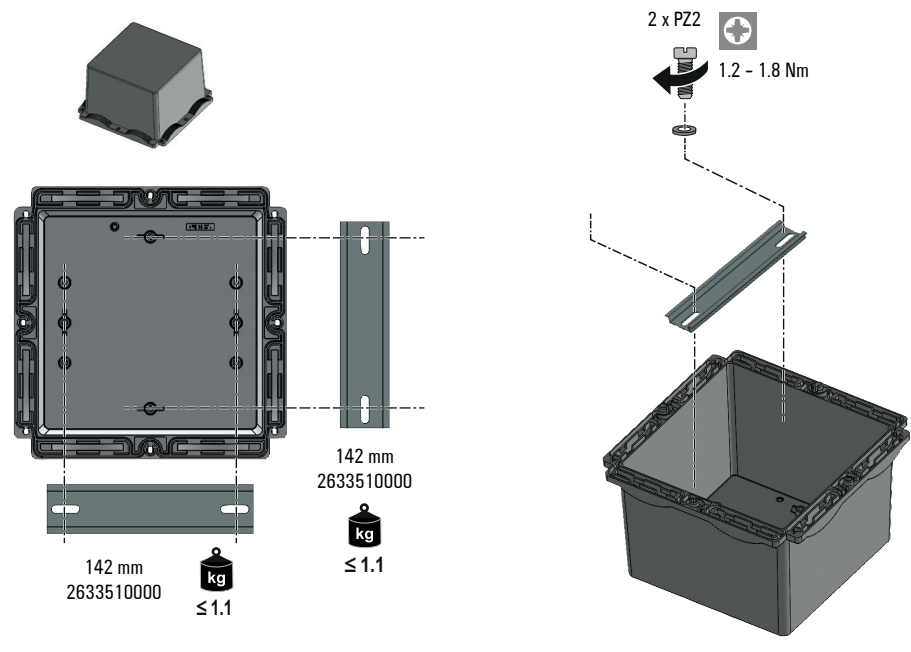

Technische Daten / Technical data		
Schutzart	Protection class	IP65
Umgebungstemperatur	Ambient temperature	-40 °C...+85 °C
Material	Material	Polycarbonate / Aluminium
Dichtungsmaterial	Seal material	EPDM
Rüttelsicher gemäß	Resistant to vibrations according to	IEC 61373 category 1b
Maße (L / B / H)	Dimensions (L / W / H)	FP ENC BSBS 155 2M
		FP ENC BSTS 155 2M
		FP ENC BSAS 220 3M
		FP ENC BS 042 2B
		FP ENC TS 113 2C
		FP ENC BS 113 2C
		FP ENC AS 178 2C

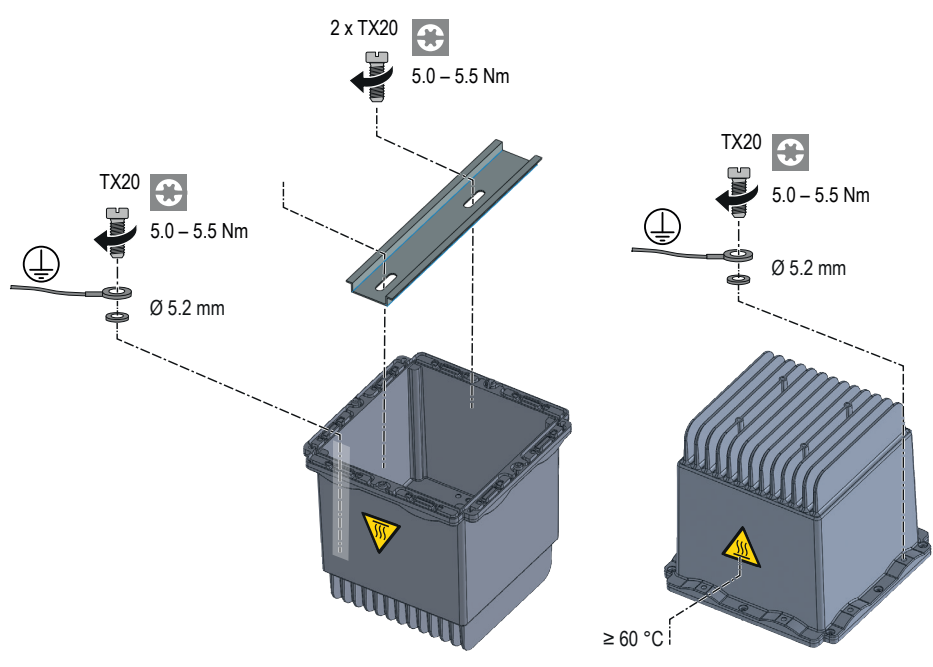

FieldPower® Enclosure Size 2

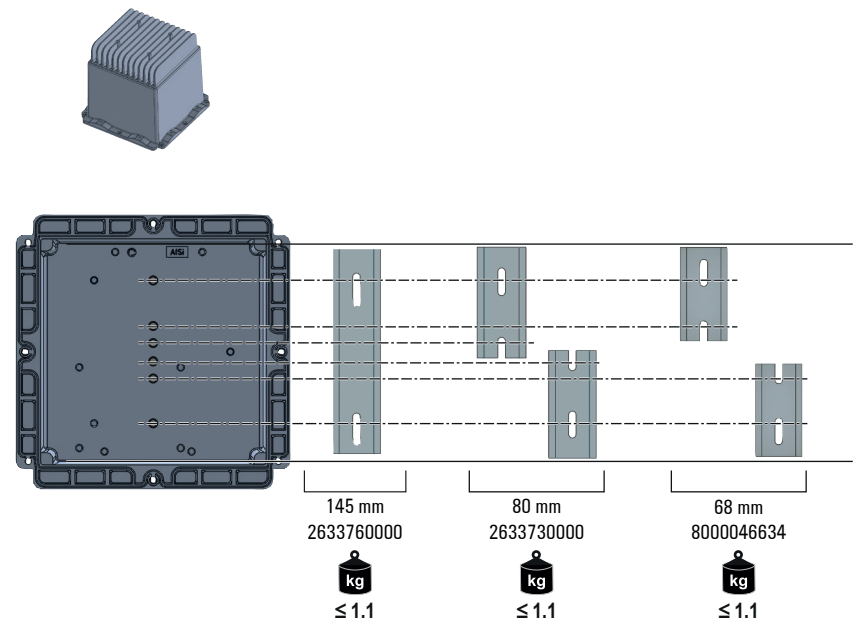

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
www.weidmueller.com
2674490000/03/09.2022