

AP RF 122 RE OR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

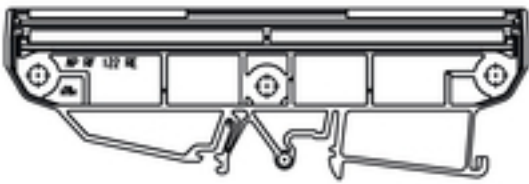
D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Flexible - More flexible - Profilform**

Modular housings in profile form - the flexible modular system comprising coloured and transparent plastic profiles and carrier modules

The combination of standard pitches mounted side by side in any arrangement and metre goods cut accurate to the millimetre creates the perfect balance between flexibility and economic efficiency:

- Pitch profiles with standard widths ranging from 5mm to 45mm allow the mounting of all standard PCB formats.
- Variable heights ensure maximum component density, even with larger electronics components.
- The different installation variations mean that mounting the enclosure directly is as easy as clipping components onto the terminal rail
- Solid hoods protect the module reliably from external influences

The recipe for success: variable profile + modular form components = flexible enclosure concept that offers a large surface area for the PCBs.

The modular concept is designed for modules with high space requirements and suitable for small component quantities and different widths.

General ordering data

Type	AP RF 122 RE OR
Order No.	1020650000
Version	Electronics housings orange, End plate, Width: 6.4 mm
GTIN (EAN)	4032248740161
Qty.	20 pc(s).

AP RF 122 RE OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Dimensions and weights

Length	130.8 mm	Length (inches)	5.15 inch
Width	6.4 mm	Width (inches)	0.252 inch
Height	41.2 mm	Height (inches)	1.622 inch
Net weight	16.4 g		

System characteristics

Version	End plate	Cross-connection	No
Contact to terminal rail	No	Protection degree	IP20
Encapsulation option	No		

Material data

Insulating material	PA 66	Colour	orange
Colour chart (similar)	RAL 2000	Comparative Tracking Index (CTI)	≥ 600
UL 94 flammability rating	V-2	Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C	Max. relative humidity during storage	80 %
Operating temperature, min.	-50 °C	Operating temperature, max.	100 °C
Temperature range, installation, min.	-25 °C	Temperature range, installation, max.	100 °C

Classifications

ETIM 6.0	EC001031	ETIM 7.0	EC001031
eClass 9.0	27-18-27-90	eClass 9.1	27-18-27-90
eClass 10.0	27-18-27-92		

Notes

Descriptive text technical data

2 optional positions for the PCB

Dimensions of the PCB:

Thickness: 1.6 (±0.2) mm, width: +0.5 mm

Dimension of RS section = PCB length - 5 mm

Example:

PCB length 160 mm, RS section = 155 mm

Approvals

Approvals



ROHS

Conform

AP RF 122 RE OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Downloads

Brochure/Catalogue	FL ANALO.SIGN.CONV. EN
	MB DEVICE MANUF. EN
	CAT 2 PORTFOLIOGUIDE EN
	FL MACHINE SAFETY EN
	FL 72H SAMPLE SER EN
Engineering Data	PO OMNIMATE EN
Engineering Data	EPLAN
Engineering Data	STEP