

ACT20P ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com



ACT20P: The flexible solution

- Precise and highly functional signal converters
- Simple configuration via display (Pro DCDC II), FDT/DTM software or DIP switch
- Release levers simplify handling
- More space in the control cabinet, from 12.5 mm wide for two channels

General ordering data

Type	ACT20P-BRIDGE-S
Order No.	1067250000
Version	ACT20P, Measuring bridge converter, Screw connection
GTIN (EAN)	4032248820856
Qty.	1 pc(s).

ACT20P ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Width	22.5 mm	Width (inches)	0.886 inch
Height	117.2 mm	Height (inches)	4.614 inch
Depth	113.6 mm	Depth (inches)	4.472 inch
Net weight	156.9 g		

Temperatures

Humidity	10...90 % (no condensation)	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...85 °C		

Probability of failure

MTTF	543 Years
------	-----------

Input

Number of inputs	1	Sensor	Resistance measuring bridge, Total resistance of all parallel resistance measuring bridges: min. 87Ω
Sensor supply	120 mA @ 10 V (= 4 x 350 Ω bridge resistors)	Input measurement range	± 10 mV / ± 20 mV / ± 30 mV / ± 50 mV (adjustable)
Bridge supply voltage	5 V or 10 V	Bridge sensitivity	1.0 mV / V to 5.0 mV / V

Output

Type	Voltage and current output (configurable)	Output voltage, note	0 ... 11 V (adjustable)
Output current	0...22 mA (adjustable)	load impedance voltage	600 Ω
load impedance current	≤ 600 Ω		

General data

Configuration	DIP switch and button	Linearity	Typically ± 0.05 % of signal range
Long-term drift	0.1 % / 10.000 h	Mounting rail	TS 35
Power consumption	3 W @ 24 V DC	Repeat accuracy	± 0.05% of signal range
Step response time	< 400 ms (10...90 %)	Supply voltage	10...60 V DC
Temperature coefficient	typ. 0.005 % / °C		

Insulation coordination

EMC standards	EN 61326	Insulation voltage	5.7 kV (input / output, input / supply)
Pollution severity	2	Rated voltage	300 V _{eff}
Standards	DIN EN 61010-1, DIN EN 61000-4-2	Surge voltage category	III

Output (analogue)

Type (analogue output)	Voltage and current output (configurable)
------------------------	---

ACT20P ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Technische Daten

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, rated connection, min.	0.5 mm ²	Clamping range, rated connection, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Rated data UL

UL certificate	Listing no.: E256486
----------------	----------------------

Classifications

ETIM 3.0	EC002479	ETIM 4.0	EC002653
ETIM 5.0	EC002653	ETIM 6.0	EC002653
eClass 5.1	27-21-01-07	eClass 6.2	27-21-01-20
eClass 7.1	27-21-01-20	eClass 8.1	27-21-01-20
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-90

Approvals

Approvals



ROHS	Conform
------	---------

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN_WSCAD
User Documentation	Quickstart_german.pdf Instruction sheet

ACT20P ACT20P-BRIDGE-S


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Zeichnungen

Electric symbol

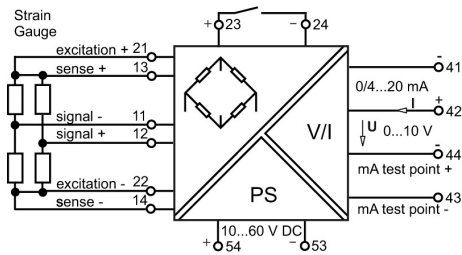

Dimensioned drawing

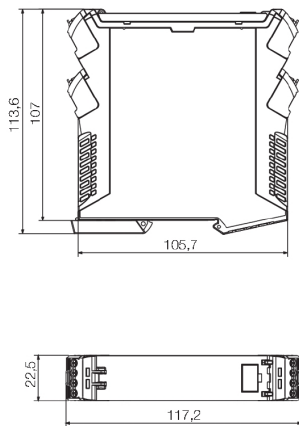

dimensions

