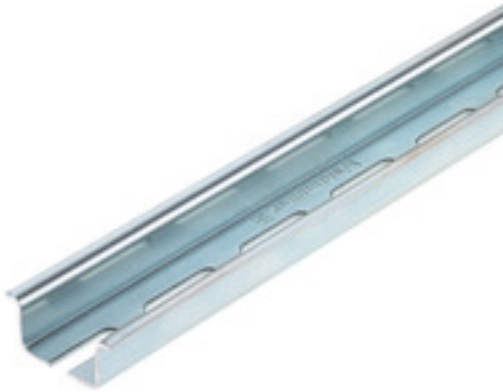


**TS 35X15/LL 2M/ST/ZN/O****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

**General ordering data**

|            |                                                                                                                     |
|------------|---------------------------------------------------------------------------------------------------------------------|
| Version    | Terminal rail, Accessories, Steel, galvanic zinc plated and passivated, Width: 2000 mm, Height: 35 mm, Depth: 15 mm |
| Order No.  | <a href="#">1071680000</a>                                                                                          |
| Type       | TS 35X15/LL 2M/ST/ZN/O                                                                                              |
| GTIN (EAN) | 4032248884636                                                                                                       |
| Qty.       | 20 m                                                                                                                |

## TS 35X15/LL 2M/ST/ZN/O

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 15 mm    | Depth (inches)  | 0.591 inch |
| Height     | 35 mm    | Height (inches) | 1.378 inch |
| Width      | 2,000 mm | Width (inches)  | 78.74 inch |
| Net weight | 590 g    |                 |            |

## Temperatures

|                     |               |
|---------------------|---------------|
| Ambient temperature | -5 °C...40 °C |
|---------------------|---------------|

## Mounting rail

|                                                                         |                                     |                 |  |
|-------------------------------------------------------------------------|-------------------------------------|-----------------|--|
| Installation advice                                                     |                                     | Direct mounting |  |
| Length of the terminal rail                                             | min.                                | 0 mm            |  |
|                                                                         | max.                                | 2,000 mm        |  |
|                                                                         | nominal                             | 2,000 mm        |  |
| Material                                                                | Steel                               |                 |  |
| Pre-punched mounting rail                                               | Yes                                 |                 |  |
| Short circuit strength corresponds to E-Cu wire                         | 50 mm²                              |                 |  |
| Short-time withstand current per second 6 kA according to IEC 60947-7-2 |                                     |                 |  |
| Slit gap                                                                | 11 mm                               |                 |  |
| Slit gap                                                                |                                     |                 |  |
| Slit length                                                             | 25 mm                               |                 |  |
| Slit length                                                             |                                     |                 |  |
| Slit width                                                              | 5.2 mm                              |                 |  |
| Slit width                                                              |                                     |                 |  |
| Spacing of holes, centre-to-centre                                      | 36 mm                               |                 |  |
| Standards                                                               | In accordance with DIN EN 60715     |                 |  |
| Surface finish                                                          | galvanic zinc plated and passivated |                 |  |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001285    | ETIM 7.0    | EC001285    |
| ETIM 8.0    | EC001285    | ETIM 9.0    | EC001285    |
| ETIM 10.0   | EC001285    | ECLASS 9.0  | 27-40-06-02 |
| ECLASS 9.1  | 27-40-06-02 | ECLASS 10.0 | 27-40-06-02 |
| ECLASS 11.0 | 27-40-06-02 | ECLASS 12.0 | 27-40-06-02 |
| ECLASS 13.0 | 27-40-06-02 | ECLASS 14.0 | 27-40-06-02 |
| ECLASS 15.0 | 27-40-06-02 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                    |                                                 |
|--------------------|-------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                 |
| User Documentation | <a href="#">StorageConditionsTerminalBlocks</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>        |

Creation date May 15, 2025 1:36:32 PM CEST

## TS 35X15/LL 2M/ST/ZN/O

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Product image

