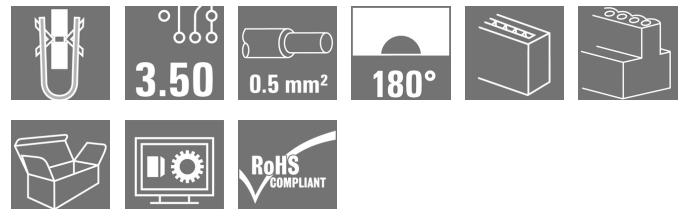



OMNIMATE Signal - series BL/SL 3.50
BLIDCB 3.50/08/- SN BK BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

Similar to illustration

Female connectors for fast processing with insulation displacement connectors (IDC) for connecting wires at 3.50 pitch. They provide space for labelling and can be coded.

General ordering data

Type	BLIDCB 3.50/08/- SN BK BX
Order No.	1770730000
Version	PCB plug-in connector, female plug, 3.50 mm, Number of poles: 8, 90°/270°, IDC terminal, Clamping range, max. : 0.5 mm², Box
GTIN (EAN)	4032248174515
Qty.	10 pc(s).
Product data	IEC: 250 V / 6 A / 0.35 - 0.5 mm² UL: 300 V / 7 A / AWG 22 - AWG 20
Packaging	Box

OMNIMATE Signal - series BL/SL 3.50 BLIDCB 3.50/08/- SN BK BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Height	12.5 mm	Height (inches)	0.492 inch
Depth	21.2 mm	Depth (inches)	0.835 inch
Net weight	8.5 g		

System Parameters

Product family	OMNIMATE Signal - series BL/SL 3.50	Type of connection	Field connection
Wire connection method	IDC terminal	Pitch in mm (P)	3.5 mm
Pitch in inches (P)	0.138 inch	Conductor outlet direction	90°/270°
Number of poles	8	L1 in mm	24.5 mm
L1 in inches	0.965 inch	Number of rows	1
Pin series quantity	1	Rated cross-section	0.5 mm ²
Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch	Touch-safe protection acc. to DIN VDE 0470	IP 20
Volume resistance	≤ 5mΩ	Can be coded	Yes
Screwdriver blade	0.4 x 2.5	Screwdriver blade standard	DIN 5264-A
Plugging cycles	25	Plugging force/pole, max.	7.5 N
Pulling force/pole, max.	5.5 N		

Material data

Insulating material	PBT	Colour	Black
Colour chart (similar)	RAL 9011	Insulating material group	IIIa
Comparative Tracking Index (CTI)	≥ 200	Insulation strength	≥ 10 ⁸ Ω
UL 94 flammability rating	V-0	GWFI	960 °C
Contact material	CuSn	Contact surface	tinned
Storage temperature, min.	-25 °C	Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %	Operating temperature, min.	-50 °C
Operating temperature, max.	80 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	80 °C		

Conductors suitable for connection

Clamping range, min.	0.32 mm ²	Clamping range, max.	0.5 mm ²
Wire connection cross section AWG, min.	AWG 22	Wire connection cross section AWG, max.	AWG 20
Solid, min. H05(07) V-U	0.35 mm ²	Solid, max. H05(07) V-U	0.5 mm ²
Flexible, min. H05(07) V-K	0.35 mm ²	Flexible, max. H05(07) V-K	0.5 mm ²
Outer diameter of insulation, max.		Reference text	The outside diameter of the plastic collar should not be larger than the pitch (P).
	2.1 mm		
Max. clamping range	0.5 mm ²		

**OMNIMATE Signal - series BL/SL 3.50
BLIDCB 3.50/08/- SN BK BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Rated data acc. to IEC**

tested acc. to standard	IEC 60664-1, IEC 61984	Rated current, min. number of poles (Tu=20°C)	6 A
Rated current, max. number of poles (Tu=20°C)	6 A	Rated current, min. number of poles (Tu=40°C)	6 A
Rated current, max. number of poles (Tu=40°C)	5 A	Rated voltage for surge voltage class / pollution degree II/2	250 V
Rated voltage for surge voltage class / pollution degree III/2	160 V	Rated voltage for surge voltage class / pollution degree III/3	160 V
Rated impulse voltage for surge voltage class/ pollution degree II/2	2.5 kV	Rated impulse voltage for surge voltage class/ pollution degree III/2	2.5 kV
Rated impulse voltage for surge voltage class/ contamination degree III/3	2.5 kV	Short-time withstand current resistance	3 x 1s with 60 A

Rated data acc. to CSA

Institute (CSA)		Certificate No. (CSA)	200039-1068660
Rated voltage (Use group B / CSA)	300 V	Rated voltage (Use group D / CSA)	300 V
Rated current (Use group B / CSA)	7 A	Rated current (Use group D / CSA)	7 A
Wire cross-section, AWG, min.	AWG 22	Wire cross-section, AWG, max.	AWG 20
Reference to approval values	Specifications are maximum values, details - see approval certificate.		

Rated data acc. to UL 1059

Institute (UR)		Certificate No. (UR)	E60693
Rated voltage (Use group B / UL 1059)	300 V	Rated voltage (Use group D / UL 1059)	300 V
Rated current (Use group B / UL 1059)	7 A	Rated current (Use group D / UL 1059)	7 A
Wire cross-section, AWG, min.	AWG 22	Wire cross-section, AWG, max.	AWG 20
Reference to approval values	Specifications are maximum values, details - see approval certificate.		

Packing

Packaging	Box	VPE length	50 mm
VPE width	90 mm	VPE height	110 mm

Classifications

ETIM 6.0	EC002638	ETIM 7.0	EC002638
eClass 9.0	27-44-03-09	eClass 9.1	27-44-03-09
eClass 10.0	27-44-03-09	UNSPSC	30-21-18-10

OMNIMATE Signal - series BL/SL 3.50 BLIDCB 3.50/08/- SN BK BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Notes

Notes

- Additional colours on request
- Rated current related to rated cross-section & min. No. of poles.
- For IDC contact 0.5: cable acc. to DIN EN 60352-4
- AWG conductor: solid, 7 or 19 strands only
- Temperature range -20 to +80 °C
- BLIDC 3.5 and BLIDCB 3.5 conductors "solid"/"flexible" to DIN 47726
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity

[Declaration of the Manufacturer](#)

Brochure/Catalogue

[FL DRIVES EN](#)
[MB DEVICE MANUF. EN](#)
[FL DRIVES DE](#)
[CAT 2 PORTFOLIOGUIDE EN](#)
[FL BUILDING SAFETY EN](#)
[FL APPL LED LIGHTING EN](#)
[FL INDUSTR.CONTROLS EN](#)
[FL MACHINE SAFETY EN](#)
[FL HEATING ELECTR EN](#)
[FL APPL INVERTER EN](#)
[FL_BASE_STATION_EN](#)
[FL ELEVATOR EN](#)
[FL POWER SUPPLY EN](#)
[FL 72H SAMPLE SER EN](#)
[PO OMNIMATE EN](#)

Engineering Data


[WSCAD](#)

OMNIMATE Signal - series BL/SL 3.50 BLIDCB 3.50/08/- SN BK BX


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Dimensional drawing

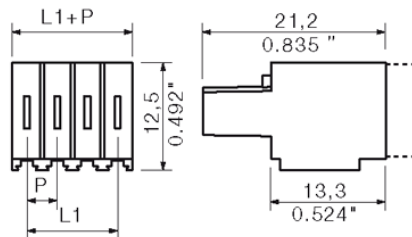

Graph

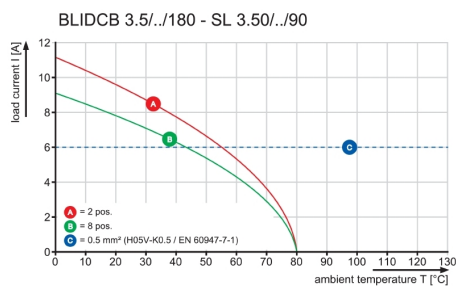


Technical Data

Rev.		
Material data		
Insulation material type		PBT
Insulation material colours		orange
Insulation material flammability class	UL94	V-0
Insulation resistance	MOhm	>10 ⁵
Contact base material		Cu-alloy
Contact plating		tin plated
System characteristic values		
	with counterpart	
Pitch P	mm/inch	3.5/0.138
Number of rows		1
Dielectric strength (r.m.s withstand voltage)	kV	>1.39
Mechanical operating cycles	acc. to IEC 512	>50
Plug in force (max.)	N/pole	10
Pull out force (max.)	N/pole	10
Through resistance (typical)	mOhm	<5,0
Operating temperature range	°C	-20... +80
Degree of protection acc. to VDE 0106 (plugged/unplugged)		finger safe/back of hands
Degree of protection acc. to DIN EN 60529 (plugged/unplugged)		IP20/IP10
Conductor connection method		IDC connection
Screw size		n.a.
Screw torque max. acc. to EN 60999	Nm	n.a.
Screw driver type		0.4 x 2.5
Application notes		
Coding possibility	yes/no	yes (accessory)
Joinable without loss of pitch	yes/no	yes
Manual assembly of modules	yes/no	no
Max. number of poles	n	12
Conductor		
Clamping range	mm ²	0.35 ... 0.5
"e" solid H05(07) V-U	mm ²	0.5
"f" flexible H05(07) V-K	mm ²	0.5
"f" with ferrule acc. to DIN 46228/1	mm ²	n.a.
... with plastic collar acc. to DIN 46228/4	mm ²	n.a.
Conductor insulation stripping length	mm/inch	n.a.
Conductor insulation diameter max.	mm/inch	2.1
Two wire clamping range	mm ²	n.a.
Gauge to EN 60999 (a x b ; Ø)	mm	n.a.
IEC 664-1 / VDE0110 (4.97) rated data		
Rated cross section acc. to EN 60999	mm ²	0.5
Rated current @ 20°C ambient (together with)	A	6 (SL 3.5)
Rated current @ 40°C ambient (together with)	A	6 (SL 3.5)
Overvoltage category / Pollution degree		
	III/3	III/2
Rated voltage	V	160 250 320
Rated impulse voltage	kV	2.5 2.5 2.5
UL 1059 rated data		
	File No.: E60693	B C D
Rated voltage	V	300
Rated current	A	7
AWG wire range (field wiring / factory wiring)		22 ... 20
CSA C22.2 rated data		
	File No.: LR12400	B C D
Rated voltage	V	300
Rated current	A	7
AWG wire range (field wiring / factory wiring)		22 ... 20
Packaging		
		card box
Downloads		
		www.weidmueller.de

- 1) Without locking latches
- 2) Sum of ambient temperature and temperature rise
- 3) Referred to rated cross section and minimum pole number

n.a. = not applicable

Subject to technical changes

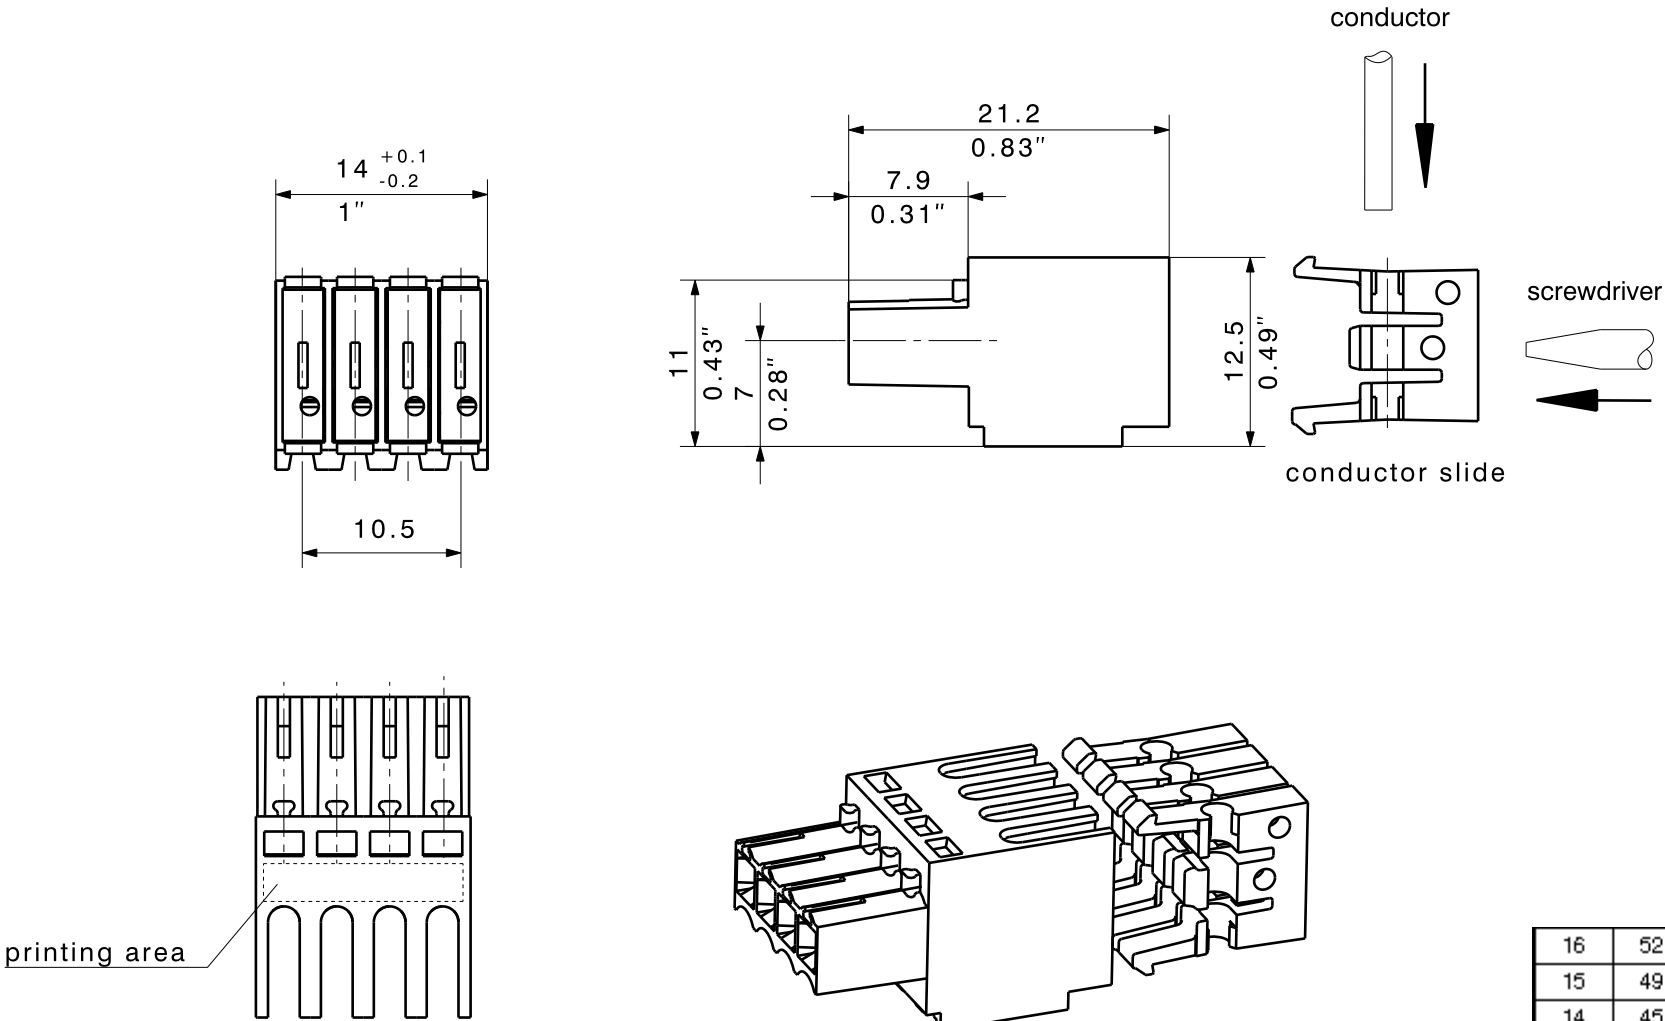

16	52,50	2,067
15	49,00	1,929
14	45,50	1,791
13	42,00	1,654
12	38,50	1,516
11	35,00	1,378
10	31,50	1,240
9	28,00	1,102
8	24,50	0,965
7	21,00	0,827
6	17,50	0,689
5	14,00	0,551
4	10,50	0,413
3	7,00	0,276
2	3,50	0,138
n	L1 [mm]	L1 [inch]

shown: BLIDCB 3.5/4

For the mounting of PCBs, it should be noted that the rated data stated here relates only to the PCB components alone.
The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.
The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application.
Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

METRIC TOLERANCES:
X. = ±0.3
X.X = ±0.1
X.XX = ±0.05

③ :
② :
① :

MODIFICATION

METRIC/INCH DIMENSIONS

SCALE: 2:1

SUPERSEDES: .

SUPERSEDED BY: .

DRAWN

RESPONSIBLE

CHECKED

APPROVED

DATE

17.12.02

17.12.02

25.09.03

26.09.03

NAME

Lux

Lux

Phillips

Endres

PRODUCT FILE: BLIDCB 3.5

Customer Drawing

Weidmüller

C 27649

DRAWING NO.

SHEET: 1 OF 2 SHEETS

0

ISSUE NO.

BLIDCB 3.5/2...12

Socket Block