

SAIL-M8GM8G-3-2.0U

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

| | |
|------------|--|
| Type | SAIL-M8GM8G-3-2.0U |
| Order No. | 1824570200 |
| Version | Sensor/actuator line, Connecting line, M8 / M8, Number of poles : 3, 2 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| GTIN (EAN) | 4032248609017 |
| Qty. | 1 pc(s). |

SAIL-M8GM8G-3-2.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 54 g

Temperatures

Operating temperature, max. 80 °C Operating temperature, min. -25 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

| | | | |
|--------------------------------------|----------------------------------|--|--|
| Number of poles | 3 | Core cross-section | 0.25 mm ² |
| Outside diameter | 4.1 mm ± 0.2 mm | Cable length | 2 m |
| Shielded | No | Insulation | PP |
| Colour coding | brown, blue, black | Sheath material | PUR |
| Sheathing colour | Black | Halogen | No |
| Temperature range, moving | -25...80 °C | Temperature range, stationary | -40...80 °C |
| Core in accordance with UL AWM style | 10493 (80 °C / 300 V) | Outer cladding in accordance with UL AWM style | 20233/21198 (80 °C / 300 V) |
| Suitable for cable carriers | Yes | Torsion resistance | 360 °/m |
| Bending radius, min., stationary | 5 x cable diameter | Bending radius, min., moving | 10 x cable diameter |
| Acceleration | 5 m/s ² | Speed | 5 m/s |
| Bending cycles | 2 Mio | Resistant to welding beads | No |
| Configurable cable length | No | Hydrolysis and microbe resistant | Yes |
| Resistance to oils | | Resistance to spread of flame | In accordance with UL 1581 UL/ CUL FT1, in accordance with IEC 60332-1-2, in accordance with IEC 60332-1-3, in accordance with IEC 60332-2-2 |
| | in accordance with IEC 60811:404 | | |

General technical data

| | | | |
|------------------------------|---|-----------------------|----------------------------------|
| AF size | 12 mm | Version | pin, straight - socket, straight |
| Connection thread | M8 / M8 | Housing main material | PUR |
| Threaded ring material | Diecast zinc | Coding | none |
| Protection degree | IP65, IP66, IP67, IP68, when screwed in | Contact surface | Gold-plated |
| LED | No | Rated voltage | 60 V |
| Rated current | 4 A | Insulation strength | 10 ⁸ Ω |
| Temperature range of housing | -25...+80 °C | Tightening torque | M8: 0.5 - 0.6 Nm |
| Plugging cycles | ≥ 100 | Pollution severity | 3 |
| jumpered | No | | |

Standards

| | | | |
|-------------------------|-----------------|-------------------------|---------|
| Connector standard | IEC 61076-2-104 | Certificate No. (cURus) | E307231 |
| Certificate no. (cULus) | E307231 | | |

SAIL-M8GM8G-3-2.0U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC001855 | ETIM 7.0 | EC001855 |
| eClass 9.0 | 27-06-03-11 | eClass 9.1 | 27-06-03-11 |
| eClass 10.0 | 27-06-03-11 | UNSPSC | 26-12-16-13 |

Approvals

Approvals



ROHS

Conform

Downloads


| | |
|--------------------|-----------------------------------|
| Brochure/Catalogue | FL FIELDWIRING EN |
| Engineering Data | EPLAN, WSCAD |

SAIL-M8GM8G-3-2.0U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com


Drawings

Dimensioned drawing




Male, straight

Pole scheme

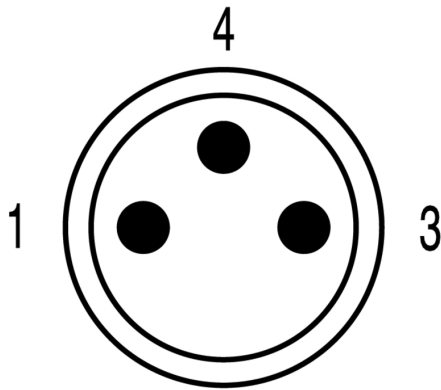


Male

Dimensioned drawing




Straight socket

Pole scheme

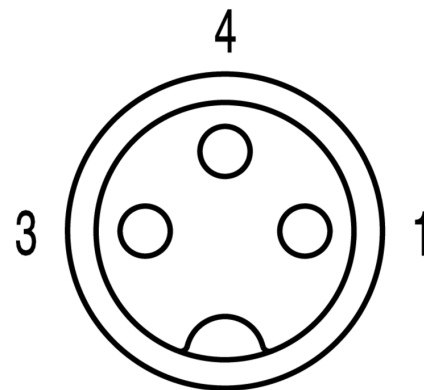

Socket

Wiring diagram



The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F