

WPD 108 1X120/2X35+3X25+4X16 BK**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Our WPD 1XX distribution blocks are used in all situations where power is supplied and distributed. Their user-friendly design creates a better overview and enables rapid, efficient implementation of space-saving power distribution.

General ordering data

Version	Potential distributor terminal, Screw connection, black, 120 mm ² , 400 A, 1000 V, Number of connections: 10, Number of levels: 1
Order No.	2725380000
Type	WPD 108 1X120/2X35+3X25+4X16 BK
GTIN (EAN)	4050118796506
Qty.	1 pc(s).

WPD 108 1X120/2X35+3X25+4X16 BK
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Dimensions and weights

Depth	77 mm	Depth (inches)	3.031 inch
Height	95 mm	Height (inches)	3.74 inch
Width	51.1 mm	Width (inches)	2.012 inch
Net weight	480 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	130 °C

Material data

Material	Wemid	Colour	black
UL 94 flammability rating	V-0		

Rating data IECEx/ATEX

Certificate No. (ATEX)	CNEX16ATEX0005U	Certificate No. (IECEX)	IECEXCNEX16.0005U
Max. voltage (ATEX)	1100 V	Current (ATEX)	250 A
Wire cross section max. (ATEX)	120 mm ²	Max. voltage (IECEX)	1100 V
Current (IECEX)	250 A		

System specifications

Version	Screw connection	End cover plate required	No
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	Rail	Mounting plate, TS 35
N-function	Yes	PE function	No
PEN function	No		

Additional technical data

Explosion-tested version	Yes	Open sides	closed
Type of mounting	Snap-on		

CSA rating data

Certificate number (cCSAus)	70128467
-----------------------------	----------

Conductors for clamping (additional connection)

Connection type, additional connection	Screw connection
--	------------------

WPD 108 1X120/2X35+3X25+4X16 BK
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Conductors for clamping (rated connection)

Clamping range, max.	120 mm ²	Clamping range, min.	1.5 mm ²
Connection cross-section, stranded, max.	120 mm ²	Connection direction	on side
Number of connections	10	Type of connection	Screw connection
Type of connection 2	Screw connection	Wire connection cross section AWG, max.	kcmil 250
Wire connection cross section AWG, min.	AWG 16	Wire connection cross section, finely stranded, max.	0 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	95 mm ²	Wire connection cross-section, solid core, max.	120 mm ²

General

Number of poles	1	Rail	Mounting plate, TS 35
Standards	IEC 60947-7-1, UL 1059	Wire connection cross section AWG, max.	kcmil 250
Wire connection cross section AWG, min.	AWG 16		

Rating data

Rated cross-section	120 mm ²	Rated voltage	1,000 V
Rated AC voltage	1,000 V	Rated DC voltage	1,500 V
Rated current	400 A	Current at maximum wires	400 A
Standards	IEC 60947-7-1, UL 1059	Power loss in accordance with IEC 60947-7-x	4 W

UL rating data

Certificate No. (cURus)	E60693
-------------------------	--------

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20
ECLASS 13.0	27-25-01-19	ECLASS 14.0	27-25-01-19
ECLASS 15.0	27-25-01-19		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	e1c310ef-6b67-4efa-80a6-d307472f4de9

Important note

Product information	The socket complies with flammability class V-2 according to UL94.
---------------------	--

WPD 108 1X120/2X35+3X25+4X16 BK
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Approvals

Approvals



Approvals MAMID

https://mdcop.weidmueller.com/mediadelivery/rendition/900_319221/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319213/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319240/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/

ROHS

Conform

UL File Number Search

UL Website

Certificate No. (cURus)

E60693

Downloads

Approval/Certificate/Document of Conformity

[Attestation of Conformity](#)
[UKCA Ex Attestation of Conformity](#)
[CB Certificate](#)
[UKCA Ex Certificate](#)
[CE Declaration of Conformity](#)
[UKCA declaration of conformity](#)
[Confirmation of Standards EN 45545-2_2020-10](#)

Engineering Data

[CAD data – STEP](#)

User Documentation

[DATA SHEET WPD 108](#)
[Manual - How to connect aluminum wires in WPD-Terminal blocks](#)
[Torque_Conductor_Connection_Data_WPD_EN](#)
[Drehmoment_Leiteranschlussdaten_WPD_DE](#)

Catalogues


[Catalogues in PDF-format](#)

WPD 108 1X120/2X35+3X25+4X16 BK

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



Conductor connection data according to IEC 60897-1 (Cu)									
Input	connection point A				connection point B				Diagram
	Cu 2.5	Cu 4	Cu 6	Cu 10	Cu 2.5	Cu 4	Cu 6	Cu 10	
120 mm²									
35 mm²									
25 mm²									
16 mm²									
10 mm²									
6 mm²									
4 mm²									
2.5 mm²									
1.5 mm²									
1 mm²									
0.75 mm²									
0.5 mm²									
0.35 mm²									
0.25 mm²									
0.18 mm²									
0.14 mm²									
0.1 mm²									
0.075 mm²									
0.06 mm²									
0.045 mm²									
0.035 mm²									
0.025 mm²									
0.018 mm²									
0.014 mm²									
0.01 mm²									
0.0075 mm²									
0.006 mm²									
0.0045 mm²									
0.0035 mm²									
0.0025 mm²									
0.0018 mm²									
0.0014 mm²									
0.001 mm²									
0.00075 mm²									
0.0006 mm²									
0.00045 mm²									
0.00035 mm²									
0.00025 mm²									
0.00018 mm²									
0.00014 mm²									
0.0001 mm²									
0.000075 mm²									
0.00006 mm²									
0.000045 mm²									
0.000035 mm²									
0.000025 mm²									
0.000018 mm²									
0.000014 mm²									
0.00001 mm²									
0.0000075 mm²									
0.000006 mm²									
0.0000045 mm²									
0.0000035 mm²									
0.0000025 mm²									
0.0000018 mm²									
0.0000014 mm²									
0.000001 mm²									
0.00000075 mm²									
0.0000006 mm²									
0.00000045 mm²									
0.00000035 mm²									
0.00000025 mm²									
0.00000018 mm²									
0.00000014 mm²									
0.0000001 mm²									
0.000000075 mm²									
0.00000006 mm²									
0.000000045 mm²									
0.000000035 mm²									
0.000000025 mm²									
0.000000018 mm²									
0.000000014 mm²									
0.00000001 mm²									
0.0000000075 mm²									
0.000000006 mm²									
0.0000000045 mm²									
0.0000000035 mm²									
0.0000000025 mm²									
0.0000000018 mm²									
0.0000000014 mm²									
0.000000001 mm²									
0.00000000075 mm²									
0.0000000006 mm²									
0.00000000045 mm²									
0.00000000035 mm²									
0.00000000025 mm²									
0.00000000018 mm²									
0.00000000014 mm²									
0.0000000001 mm²									
0.000000000075 mm²									
0.00000000006 mm²									
0.000000000045 mm²									
0.000000000035 mm²									
0.000000000025 mm²									
0.000000000018 mm²									
0.000000000014 mm²									
0.00000000001 mm²									
0.0000000000075 mm²									
0.000000000006 mm²									
0.0000000000045 mm²									
0.0000000000035 mm²									
0.0000000000025 mm²									
0.0000000000018 mm²									
0.0000000000014 mm²									
0.000000000001 mm²									
0.00000000000075 mm²									
0.0000000000006 mm²									
0.00000000000045 mm²									
0.00000000000035 mm²									
0.00000000000025 mm²									
0.00000000000018 mm²									
0.00000000000014 mm²									
0.0000000000001 mm²									
0.000000000000075 mm²									
0.00000000000006 mm²									
0.000000000000045 mm²									
0.000000000000035 mm²									
0.000000000000025 mm²									
0.000000000000018 mm²									
0.000000000000014 mm²									
0.00000000000001 mm²									
0.0000000000000075 mm²									
0.000000000000006 mm²									
0.0000000000000045 mm²									
0.0000000000000035 mm²									
0.0000000000000025 mm²									
0.0000000000000018 mm²									
0.0000000000000014 mm²									
0.000000000000001 mm²									
0.00000000000000075 mm²									
0.0000000000000006 mm²									
0.00000000000000045 mm²									
0.00000000000000035 mm²									
0.00000000000000025 mm²									
0.00000000000000018 mm²									
0.00000000000000014 mm²									
0.0000000000000001 mm²									
0.000000000000000075 mm²									
0.00000000000000006 mm²									
0.000000000000000045 mm²									
0.000000000000000035 mm²									
0.000000000000000025 mm²									
0.000000000000000018 mm²									
0.000000000000000014 mm²									
0.00000000000000001 mm²									
0.0000000000000000075 mm²									
0.000000000000000006 mm²									
0.0000000000000000045 mm²									
0.0000000000000000035 mm²									
0.0000000000000000025 mm²									
0.0000000000000000018 mm²									
0.0000000000000000014 mm²									
0.000000000000000001 mm²									
0.00000000000000000075 mm²									
0.0000000000000000006 mm²									
0.00000000000000000045 mm²									
0.00000000000000000035 mm²									
0.00000000000000000025 mm²									
0.00000000000000000018 mm²									
0.00000000000000000014 mm²									
0.0000000000000000001 mm²									
0.000000000000000000075 mm²									
0.00000000000000000006 mm²									
0.000000000000000000045 mm²									
0.000000000000000000035 mm²									
0.000000000000000000025 mm²									
0.000000000000000000018 mm²									
0.000000000000000000014 mm²									
0.00000000000000000001 mm²									
0.0000000000000000000075 mm²									
0.000000000000000000006 mm²									
0.0000000000000000000045 mm²									
0.0000000000000000000035 mm²									
0.0000000000000000000025 mm²									
0.0000000000000000000018 mm²									
0.0000000000000000000014 mm²									
0.000000000000000000001 mm²									
0.00000000000000000000075 mm²									
0.0000000000000000000006 mm²									
0.00000000000000000000045 mm²									
0.00000000000000000000035 mm²									
0.00000000000000000000025 mm²									
0.00000000000000000000018 mm²									
0.00000000000000000000014 mm²									
0.0000000000000000000001 mm²									
0.000000000000000000000075 mm²									
0.00000000000000000000006 mm²									
0.000000000000000000000045 mm²									
0.000000000000000000000035 mm²									
0.000000000000000000000025 mm²									
0.000000000000000000000018 mm²									
0.000000000000000000000014 mm²									
0.00000000000000000000001 mm²									
0.0000000000000000000000075 mm²									
0.000000000000000000000006 mm²									
0.0000000000000000000000045 mm²									
0.0000000000000000000000035 mm²									

Power distribution

Screw connection

W-Series

WPD 108 1X120/2X35+3X25+4X16 GY




WPD 108

120 mm²



Width / Height / Depth	mm
max. current / max. conductor	A/mm ²
max. clamping range	mm ²

51.1 / 77 / 95
269 / 120
25...120



Technical data

Rated data		
Rated voltage		V
Rated current		A
for wire cross-section	120 mm ²	mm ²
Rated impulse withstand voltage / Pollution severity		
Overvoltage category / UL 94 flammability rating		
Approvals		
Clamped conductors (H05V/H07V)		
Solid / Stranded	120 mm ²	mm ²
	35 mm ²	mm ²
	25 mm ²	mm ²
	16 mm ²	mm ²
Flexible with ferrule	120 mm ²	mm ²
	35 mm ²	mm ²
	25 mm ²	mm ²
	16 mm ²	mm ²
Stripping length / Blade size	120 mm ²	mm/-
	35 mm ²	mm/-
	25 mm ²	mm ²
	16 mm ²	mm ²
Tightening torque		Nm
Note		

IEC 60947-7-1 (Cu), UL 1059 (Cu+Al)

IEC	UL	CSA	EN 60079-7
1000	600	600	880
269	250	255	250
120	AWG 4...kcmil 250	AWG 4...kcmil 250	120
8 kV / 3			
III / V-0			
Rated connection			
35...120 / 35...120			
4...35 / 4...35			
2.5...25 / 2.5...25			
1.5...16 / 1.5...16			
25...95			
2.5...25			
1.5...16			
1.5...10			
27 / M14			
18 / M8			
12 / M6			
12 / M6			
see appendix at the end of the chapter			



Ordering data


Version	
	grey
	blue
	red
	black
Note	

Type	Qty.	Order No.
WPD 108 1x120/2x35+3x25+4x16 GY	1	1562100000
WPD 108 1x120/2x35+3x25+4x16 BL	1	2519480000
WPD 108 1x120/2x35+3x25+4x16 RD	1	2725280000
WPD 108 1x120/2x35+3x25+4x16 BK	1	2725380000


Accessories

Cross connection	
	2-pole
End bracket	
	dark beige
	dark beige
Screwdriver	
	SET

Type	Qty.	Order No.
WQB WPD X08-09/2	20	1561900000
WEW 35/2	100	1061200000
AEB 35 SC/1	50	1991920000
SDK PZ2 X 100	1	2749450000
SK WSD-S 1,5-10,0	1	9008850000



output




input

Conductor connection data according to IEC 60947-7-1 (Cu), UL 1059 (Cu+Al)

connection point A						CP** B
Input	Copper		Aluminium*		Copper	
						
120 mm ²	19 Nm	19 Nm	22,6 Nm	22,6 Nm		
95 mm ²						
70 mm ²						
50 mm ²						
35 mm ²						
25 mm ²						
Flat band 24x10mm					3 Nm	
Stripping lengths	27 mm				22 mm	
Allen screw	M14				M6	
* Values according to UL 1059 ** CP - connection point						

* Values according to UL 1059 ** CP - connection point

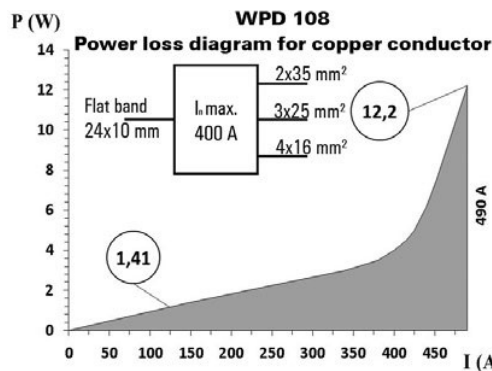

connection point 1 / 2 / 3													connection point 4 / 5 / 6 / 7				connection point 8 / 9				
Output	Copper		Aluminium*		Copper		Aluminium*		Copper		Aluminium*										
																					
35 mm²	2 Nm	2 Nm	5,1 Nm	5,1 Nm	2 Nm	2 Nm	5,1 Nm	2,5 Nm	2,5 Nm	11,3 Nm	11,3 Nm										
25 mm²																					
16 mm²																					
10 mm²																					
6 mm²																					
4 mm²																					
2.5 mm²																					
1.5 mm²																					
Stripping lengths	12 mm				12 mm				18 mm												
Allen screw	M6				M6				M8												
* Values according to UL 1059																					

* Values according to UL 1059

 Stranded
  Solid
  Flexible with ferrule
  Sector shaped
  Flat band

UL Rating data according to UL 1059

Certificate no. (UR)	XCFR2.E60693				
	connection point A				CP* B
Input (line)	Copper		Aluminium		Copper
					
kcmil 250	168.2 Lb In.	168.2 Lb In.	200 Lb In.	200 Lb In.	
AWG 4/0					
AWG 3/0					
AWG 2/0					
AWG 1/0					
AWG 2					
AWG 4					
Flat band 24x10 mm					
max. current	250 A	200 A	155 A	205 A	250 A
Voltage size B,C (UR)	600 V				
* CP - connection point					

* CP - connection point

CSA rating data according to CSA 22.2 No. 158

Certificate No. (CSA)	269832			
	Input CP* A	CP* 1/2/3	Output CP* 4/5/6/7	CP* B
kcmil 250	19 Nm.	3 Nm	3 Nm	6 Nm
AWG 2	19 Nm			
AWG 4				
AWG 6				
AWG 8				
AWG 10				
AWG 12				
AWG 14				
AWG 16				
max. current	255 A	85 A	65 A	115 A
Voltage size C (CSA)	600 V			

* CP - connection point

Output	connection point 1 / 2 / 3				connection point 4 / 5 / 6 / 7				connection point 8 / 9			
	Copper		Aluminium		Copper		Aluminium		Copper		Aluminium	
												
AWG 2	22.6 Lb In.	22.6 Lb In.	45.1 Lb In.	45.1 Lb In.	22.6 Lb In.	22.6 Lb In.	53.1 Lb In.	53.1 Lb In.	100 Lb In.	100 Lb In.		
AWG 4												
AWG 6												
AWG 8												
AWG 10												
AWG 12												
AWG 14												
AWG 16												
max. current	85 A	65 A	65 A	50 A	65 A	50 A	50 A	115 A	85 A	90 A	65 A	
Voltage size B,C (UR)	600 V											

 Stranded
  Solid
  Flexible with ferrule
  Sector shaped
  Flat band